

LED T8 TUBE SERIES

SERIES

SES-3T8

15W



Technical Specifications


| | |
|----------------|--|
| Watts: | 15W |
| Luminous Flux: | WW:1,500 lm; CW:1,650 lm |
| Length: | 900mm/3ft |
| Input Voltage: | 100-277V ac (cover 100-120V ac) |
| Description: | 15W,T8 tube,900mm/3ft, Internal driver, Non- dimmable |




Features

- ⊙ Operate Voltage: 100-277V ac, 50/60Hz
- ⊙ Luminous Efficacy: 110~120 lm/w
- ⊙ Power Factor: >0.95
- ⊙ THD: <20
- ⊙ Lense Option: Frosted,Clear
- ⊙ Color Temperature: 3000K, 4000K, 5000K, 6000K, 6500K
- ⊙ CRI: Ra>80
- ⊙ Connections: G13, Rotatable Option
- ⊙ Beam Angle: 150°
- ⊙ Net Weight: 0.3kgs/pc
- ⊙ Warranty: 5 years


Drawing

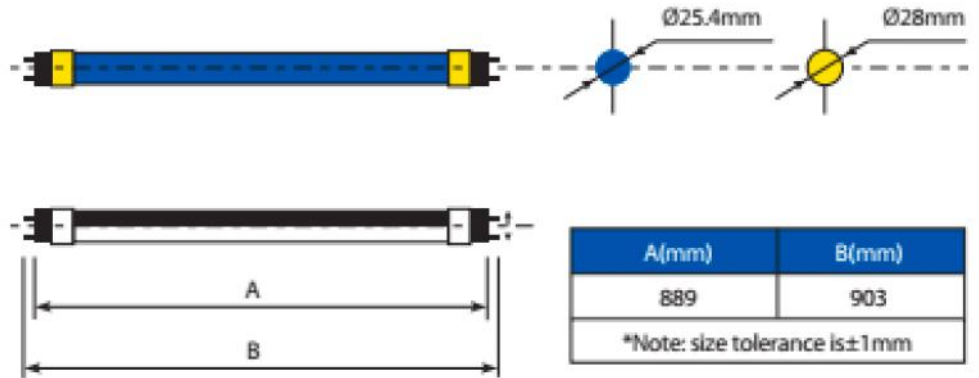

Isolux Diagrams

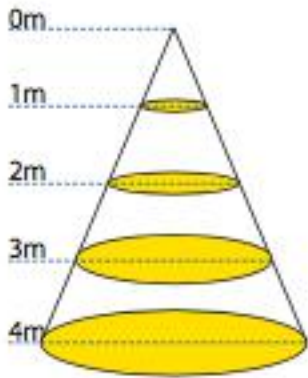

| Model# | Height | Average Lux (lx) | Light range (dia.) |
|-----------------|--------|------------------|--------------------|
| SES-3T8-XXXX-15 | 1M | 142 | 324cm |
| SES-3T8-XXXX-15 | 2M | 36 | 648cm |
| SES-3T8-XXXX-15 | 3M | 16 | 972cm |
| SES-3T8-XXXX-15 | 4M | 8 | 1295cm |

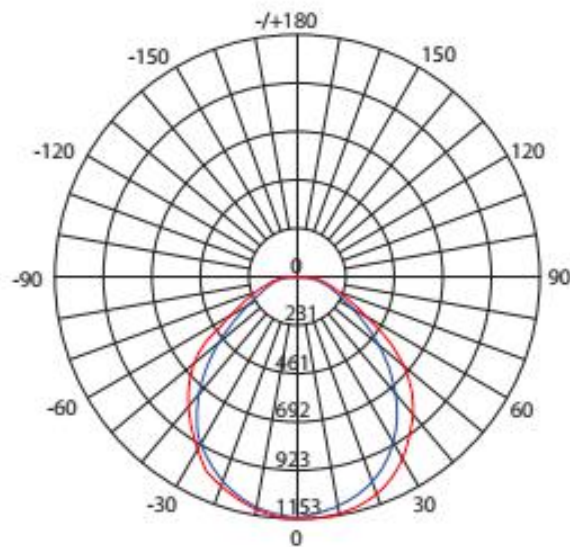

UNIT:cd

— C0/180
— C90/270

AVERAGE BEAM ANGLE(50%):123 DEG