

We Make High Quality Lights That You Can Count On

SARIN Energy Solutions is a Kansas City-based company that provides efficient LED lighting fixtures-backed by extensive warranties-all across the country. We manufacture commercial-grade LED lights at the highest standard so you can rely on them for years to come.


Our items have been age tested and certified to give you absolute peace of mind. Most of our products use Philips LED chips and MEAN WELL drivers. They are crafted with durable materials in a variety of finishes.

Our Mission

Our goal is to provide the best customer service to every client, every time. We have hundreds of carefully-built lighting fixtures that are designed to last and ensure your utmost satisfaction. You can be confident in your investment with SARIN products.





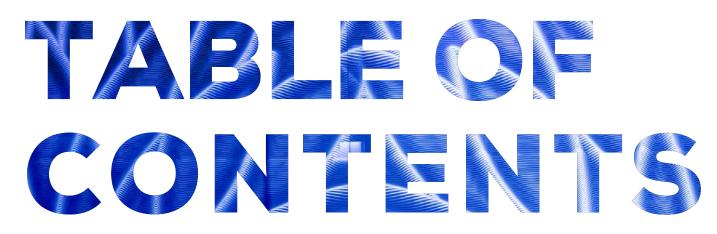

LED Lighting by Category

LIGHTED MIRRORS	4-7
CEILING LIGHTS	8-14
TROFFERS & PANELS	16-21
LINEAR & TUBE LIGHTS	22-30
ENVISION LINEAR PROFILES	31
HIGH BAY LIGHTS	32-37
EXIT & EMERGENCY	38-44
CHANNEL & STRIP LIGHTS	46-51
SPECIALTY LIGHTS	52-55
COLOSSAL SCONCE LIGHTING	56
WALL LAMPS	59-77
WALL PACKS	78-81
FLOOD & POLE LIGHTS	82-89
SOLAR LIGHTS	90-93
CANOPY & GAS SIGNS	94-99
HIGH POWER LAMPS	100-103
LANDSCAPE LIGHTS	104-113



Reinvent Your Space with Cutting-Edge LEDs

At SARIN Energy, we take pride in our high-quality and elegant LED lights. With so many design possibilities, you can create the atmosphere to delight anyone's sense of style and taste. The ability to reduce utility bills and achieve significant energy savings is just a bonus. Show off your sophistication with luxury fixtures that truly elevate your decor.

Our interior products have superior light distribution and versatility for a multitude of applications, from accent to illumination. In addition to the savings from switching to energy-efficient LEDs, you can also benefit from noticeable reductions in maintenance costs over the life of the system. LED technology lasts 4 to 8 times longer than modern incandescent or CFL lights.

We are dedicated to ensuring that your lighting needs are met. Nearly all of our lights are available in color temperatures ranging from 2700-6500K. Many of our products can be custom ordered with various sizes, colors, wattages, accessories, diffusers, finishes, and features. For more information about optional customizations, call us at 855-997-2746.





LED LIGHTED **MIRRORS**

SARIN's LED Lighted Mirrors feature quality grade materials and diffusers which are elegant and have minimum glare. These mirrors feature antifogging technology, dimmable lighting, and have a high IP rating, suitable for damp environments.

Applications:

- Homes
- Offices
- Hotels

5

Restaurants









INTERIOR LED

LIGHTED MIRRORS





Size:		30" W x 36" H x 2" D
Watts:	(38W
Lumens:	Ę	5,600lm
CCT Opti	ons: 🤇	3000K, 5000K, 6500K
Voltage:]	120V
Dimmable	e:	Touch Dimmer
IP Rating	:	P44
Finish:	1	Mirrored, Silver Gray
Materials	5: /	Aluminum, Steel
Lifespan:	, i	50,000 hours
11178 Frosted*	*crystal lens available custom order	Custom Shapes & Sizes Available

CCT Lighted Mirror, 30" x 36" - 38W







Size:	36" W x 36" H x 2" D
Watts:	43W
Lumens:	6,300lm
CCT Options:	3000K, 5000K, 6500K
Voltage:	120V
Dimmable:	Touch Dimmer
IP Rating:	IP44
Finish:	Aluminum, Steel
Materials:	Mirrored, Silver Gray
Lifespan:	50,000 hours
11179 *crystal lea available Frosted* custom orc	2





CCT Lighted Mirror, 36" x 48" - 48W

Size:	36" W x 48" H x 2" D
Watts:	48W
Lumens:	7,200lm
CCT Options:	3000K, 5000K, 6500K
Voltage:	120V
Dimmable:	Touch Dimmer
IP Rating:	IP44
Finish:	Aluminum, Steel
Materials:	Mirrored, Silver Gray
Lifespan:	50,000 hours
11180 *crysta availa	

available custom order

5

Frosted*







1	
	F
	\bigcirc

#10675

Crystal

CCT Lighted Mirror, 36″x36″ - 54W		
Size:	36" W x 36" H x 2" D	
Watts:	54W	
Lumens:	6480lm (crystal) 6800lm (frosted)	
CCT Tunable :	3000K-4000K-5000K-6000K	
Voltage:	AC100-240V	
Dimmable:	Touch Dimmer	
IP Rating:	IP42	
Finish:	Mirrored, Silver Gray	
Materials:	Aluminum, 5mm Mirror	
Lifespan:	50,000 hours	

Custom Shapes & Sizes Available

SES-ML01-7238-20-B-T ССТ ⓓ Bond Series



	CCT Lighted Mirror, 48"x36" - 67W		
	Size:	48″ \	N x 36" H x 2" D
	Watts:	67W	,
	Lumens:	79201	m (crystal) 8000lm (frosted)
	CCT Tunable :	3000k	K-4000K-5000K-6000K
ANT	Voltage:	AC10)0-240V
Goldenta -	Dimmable:	Touc	h Dimmer
	IP Rating:	IP42	
	Finish:	Mirro	ored, Silver Gray
	Materials :	Alum	ninum, 5mm Mirror
	Lifespan:	50,0	00 hours
		10678 rosted	Custom Shapes & Sizes Available

#10677

Frosted





	CCT Oval Light	ed Mirror - 46W Max.
N.	Size:	30" W x 40" H x 2" D
	Watts:	46W Max.
	Lumens:	5520lm Max
	CCT Tunable :	3000K-6000K
	Voltage:	AC100-240V
	Dimmable:	Touch Dimmer
	IP Rating:	IP42
	Finish:	Mirrored, Silver Gray
-1 	Materials:	Aluminum, 5mm Mirror
1	Lifespan:	50,000 hours
F	#10674 Crystal	Custom Shapes & Sizes Available

CT O al Liebted Mi 4014/14

INTERIOR LED

LIGHTED MIRRORS





Size:	72" W x 38" H x 2" D
Watts:	95W Max.
Lumens:	11,400lm
CCT:	3000K-4000K-5000K-6000K
Voltage:	100-240V
Dimmable:	Touch Dimmer
IP Rating:	IP42
Finish:	Mirrored, Silver Gray
Materials:	Aluminum, 5mm Mirror
Lifespan:	50,000 hours

CCT Lighted Mirror, 72"x38" - 95W Max

#10768 Crystal

Custom Shapes & Sizes Available





ADA Hotel Mirror, 24"x36" - 29W

Size:	24" W x 36" H x 5" D
Watts:	29W
Lumens:	2,900lm
CCT Tunable:	3000K-4000K-5000K-6000K
Voltage:	AC120V
Dimmable:	Non-Dimming
IP Rating:	IP44
Finish:	Mirrored, Silver Gray
Materials:	Aluminum, 5mm Mirror
Lifespan:	40,000 hours

#11317 ADA

ADA Compliant, 5° Fixed Angle Tilt



7


SARIN

LED CEILING LIGHTS

SARIN's Ceiling Lights come in variety of shapes and sizes. They are designed to easily replace incandescent or CFL lighting fixtures. These lights are also widely used for new building construction and are easy to install which reduces manual labor costs.

Applications:

- Homes
- Offices
- Hotels
- Places of Worship









INTERIOR LED

CEILING LIGHTS













CCT Slim Downlight, 4 in - 9W

Size:	4.9" L x 4.9" W x 0.8" D
Watts:	9W
Lumens:	700lm
CCT Tunable:	2700K-3000K-3500K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Finish:	White, Frosted
Materials:	Aluminum, Glass, PP
Lifespan:	50,000 hours
#10192 CCT	BR BL BN



CCT Slim Downlight, 6 in - 15W

Size:	6.9″ L x 6.9″ W x 0.8″ D
Watts:	15W
Lumens:	1,200lm
CCT Tunable:	2700K-3000K-3500K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Finish:	White, Frosted
Materials:	Aluminum, Glass, PP
Lifespan:	50,000 hours
#10893 CCT	BR BL BN
Optional: Bronze, Black, or Brushed Nickel Trim	40193-A 40193-B 40193-C

Optional: Bronze, Black, or Brushed Nickel Trim

CCT Slim Downlight, 8 in - 18W

Size:	8.9" L x 8.9" W x 0.8" D
Watts:	18W
Lumens:	1,440lm
CCT Tunable :	2700K-3000K-3500K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP44
Finish:	White, Frosted
Materials:	Aluminum & PS
Lifespan:	50,000 hours

#10892 ССТ







SES-SDL6-

ⓓ

intit





RGBWW-12	
	D
Slim Series	





RGBW Slim Downlight , 4	in - 10W
--------------------------------	----------

Size:	4.8" L x 4.8" W x 0.9" D	
Watts:	10W	
Lumens:	600lm	
CCT Tunable:	RGBWW	
Voltage:	AC120V	
Dimmable:	Арр	
IP Rating:	IP44	
Finish:	White	
Materials:	Aluminum, PMMA	
Lifespan:	35,000 hours	
#10878 RGBW Optional: Bronze, Black, or	BR BL BN	
Brushed Nickel Trim	40192-A 40192-B 40192-C	

RGBW Slim Downlight, 6 in - 12W

Size:	6.9" L x 6.9" W x 0.9" D	
Watts:	12W	
Lumens:	900lm	
CCT Tunable:	RGBWW	
Voltage:	AC120V	
Dimmable:	Арр	
IP Rating:	IP44	
Finish:	White	
Materials:	Aluminum, PMMA	
Lifespan:	35,000 hours	
#10879 RBW	BR BL BN	
	Watts: Lumens: CCT Tunable: Voltage: Dimmable: IP Rating: Finish: Materials: Lifespan: #10879	

Optional: Bronze, Black, or Brushed Nickel Trim

BR BL BN 40193-A 40193-B 40193-C

CCT Retrofit Downlight, 4 in - 10W

Size:	5″ L x 5″ W x 2.9″ D
Watts:	10W
Lumens:	760lm
CCT Tunable:	2700K-3000K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10188 CCT	







INTERIOR LED

CEILING LIGHTS











Size:	4.6" L x 4.6" W x 0.6" D
Watts:	10W
Lumens:	600lm
CCT Tunable:	2700K-3000K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10181	



CCT Slim Downlight, 6 in - 15W

Size:	6.6" L x 6.6" W x 0.7" D	
Watts:	15W	
Lumens:	1,000lm	
CCT Tunable:	2700K-3000K-4000K-5000K	
Voltage:	AC120V	
Dimmable:	TRIAC	
IP Rating:	IP43	
Finish:	White, Frosted	
Materials:	Aluminum, PC	
Lifespan:	50 ,000 hours	
#10182		

#10182 CCT





CCT Retrofit Downlight, 6 in - 15W

Size:	7.3" L x 7.3" W x 2.9" D
Watts:	15W
Lumens:	1,200lm
CCT Tunable:	2700K-3000K-4000K-5000K
Voltage:	AC120V
Dimmable:	TRIAC
IP Rating:	IP43
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours











S.

-

Commercial Downlight, 6 in - 15-30W

7.7" L x 7.7" W x 5.9" D
15W-23W-30W
2,400 / 1,840 / 1,200lm
3000K-4000K-5000K
AC120-277V
0-10V
IP20
Silver, Frosted
Aluminum
50,000 hours

SES-RDL4-CCT-9-W ССТ



	Commercial Downlight, 8 in - 37-50W	
	Size:	9.3" L x 9.3" W x 7" D
	Watt Tunable:	37W-42W-50W
	Lumens:	4,250 / 3,570 / 3,145lm
	CCT Tunable:	3000K-4000K-5000K
	Voltage:	AC120-277V
	Dimmable:	0-10V
	IP Rating:	IP20
	Finish:	Silver, Frosted
	Materials:	Aluminum
	Lifespan:	50,000 hours
	#10191 CCT	





4	Downlight & Junction Box, 6 in - 15		
-	Size:	7.3" L x 7.3" W x 4.7" D	
AN-	Watts:	15W	
18 I	Lumens:	1,050lm	
	CCT:	3000K & 5000K	
	Voltage:	AC110-277V	
- Sectorization	Dimmable:	TRIAC	
	IP Rating:	IP43	
10 I	Finish:	White	
	Materials:	Aluminum, Acrylic	
	Lifespan:	50,000 hours	
	#10212 3000K	#10213 5000K	



12

INTERIOR LED

CEILING LIGHTS











Size:	7.7" L x 7.7" W x 5.9" D
Watts:	9W
Lumens:	900lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP20
Finish:	Silver, Frosted
Materials:	Aluminum
Lifespan:	50,000 hours
#10196 CCT	



Size:	4.9" L x 4.9" W x 2.1" D
Watts:	10W
Lumens:	650lm
CCT Tunable:	2700K, 3000K, 4000K, 5000K
Voltage:	AC120V
Dimmable:	0-10V
IP Rating:	IP43
Finish:	White, Frosted
Materials:	Iron, PC
Lifespan:	50,000 hours
#10227	





ССТ

Smith

Series



Adjustable CCT Disc Downlight, 6" - 15W

Size:	7.3" L x 7.3" W x 2.1" D
Watt Tunable:	37W-42W-50W
Lumens:	1,200lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP20
Finish:	Silver, Frosted
Materials:	Aluminum
Lifespan:	50,000 hours











0

Size:		7.2" L x 7.2" W x 0.9" D	
Watts:		15W	
Lumens:		1,100lm	
CCT:		3000K & 5000K	
Voltage:		120V	
Dimmable:		TRIAC	
IP Rating:		IP44	
Finish:		White	
Materials:		Aluminum, PC	
Lifespan:		50,000 hours	
#11099 3000K	#11100 5000K		

Single CCT Disc Light, 6 in - 15W



-	Transparent Round Ceiling Light - 18W				
	Size:		14.6"	L x 13.8" \	N x 1.8" H
	Watts:		18W		
	Lumens:		2,05	2lm	
	CCT:		3000	OK & 5000	ЭК
DI	Voltage:		1201	/	
ALC: NO	Dimmable:		TRIA	C	
	IP Rating:		IP20		
	Finish:		Whit	e	
	Materials:		Alum	ninum, PMI	ЧA
	Lifespan:		50,0	00 hours	
	#10183 3000K	#10184 5000K		Covers 40183-A 40183-B 40183-C	



Size:	13.8" L x 13.8" W x 1.8" H
Watts:	18W
Lumens:	2,052lm
CCT:	3000K & 5000K
Voltage:	120V
Dimmable:	TRIAC
IP Rating:	IP20
Finish:	White
Materials:	Aluminum, PMMA
Lifespan:	50,000 hours
	Covers 000K 40183-A 40183-B



We Manufacture Custom Decorative Fixtures

Need a fixture that's not in our catalog? No problem! We can find you a qualifying equivalent or reproduce the product you need. Just send us an example along with any attributes and we'll provide you with comparable options to choose from.

We offer approved lighting packages for the following brands:

-Avid IHG	-Country
-Best Western Watercolors	Ge
-Candlewood Suites	-Crowne
-Clarion Breeze	-Hampto
Choice Hotels	Gu
-Clarion Cosmopolitan	-Hampto
Choice Hotels	Yo
-Clarion Pointe Compass	-Hilton G
Choice Hotels	-Holiday

- ry Inn and Suites Sen4 Radisson Ie Plaza New Modern ton Confident Guestroom Hilton ton Inn Forever Young Hilton
- Garden Inn Bloom
- y Inn Express

- -Holiday Inn H4
- -Home2 Chelsea Hilton
- -Home2 Tribeca Hilton -Hyatt
- -La Quinta Wyndham
- -Quality Inn Earth
- -Red Roof Inn
- -Staybridge Suites
- -Super 8 Wyndham



SARIN

9

LED **TROFFERS** & PANELS

SARIN's LED Troffer and Panel Lights provide the perfect light distribution for offices and work areas. Designed with elegance and built from quality materials such as PMMA and high grade metal, these fixtures will brighten up any work environment.

Applications:

• Offices • Stores Schools Hospitals











#40973-B

#40973-D

#40973-F Trapezoid

#40973-C Wave

#40973-Е Pyramid









TROFFERS & PANELS CCT Backlit Panel Light - 20-40W

INTERIOR LED

	•
Size:	2' L x 2' W x 1.2"D
Watt Adjustable:	20W, 30W, 40W
Lumens:	2,200-4,400lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	3-in-1 (0-10V, PWM, Rx)
IP Rating:	IP40
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours

#10973 2x2 ft

#10969* 2x2 ft *With Emergency Driver

Optional Panel Lens Available Activate both chipsets with the 4000K setting.

CCT Backlit Panel Light - 40-60W

Size:	4' L x 2' W x 1.2" D
Watt Adjustable:	40W, 50W, 60W
Lumens:	4,400-6,600lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	3-in-1 (0-10V, PWM, Rx)
IP Rating:	IP40
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10974 #10970	•

#10974 2x4 ft

2x4 ft *With Emergency Driver

Backlit Panel Light - 72W

Size:	4' L x 2' W x 1.2" D
Watts:	72W
Lumens:	9,000lm
CCT:	6500K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP40
Finish:	White, Frosted
Materials:	Aluminum, PS
Lifespan:	50,000 hours











+	Mesh CCT Fusion Troffer - 26-40W		
1.	Size:	23.74″ L x 23.74″ W x 3.9″ D	
	Watt Adjustable:	26W+32W+40W	
-	Lumens:	2,860lm, 3,520lm, 4,400lm	
F	CCT Tunable:	3000K-4000K-5000K	
1 11	Voltage:	AC120-277V	
1. 177	Dimmable:	0-10V	
	IP Rating:	IP42	
	Finish:	White	
	Materials:	Steel, PC	
	Lifespan:	50,000 hours	
	#10869 Mesh		

SES-TRO24-CCT-50-M



Size:	23.74" L x 23.74" W x 3.9" D
Watt Adjustable:	26W+32W+40W
Lumens:	2,860lm, 3,520lm, 4,400lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP42
Finish:	White
Materials:	Steel
Lifespan:	50,000 hours
#10871 Point	





/	Void CCT Fusion	Troffer - 26-40W
1	Size:	23.74″ L x 23.74″ W x 4.5″ D
/	Watt Adjustable:	26W+32W+40W
1	Lumens:	2,860lm, 3,520lm, 4,400lm
1	CCT Tunable:	3000K-4000K-5000K
-	Voltage:	AC120-277V
	Dimmable:	0-10V
	IP Rating:	IP42
	Finish:	White
	Materials:	Steel
	Lifespan:	50,000 hours
	#10873 Void	



#10871 Point

INTERIOR LED TROFFERS & PANELS















Mesh CCT Fusion Troffer - 36-50W

Size:	47.7" L x 23.74" W x 3.9" D
Watt Adjustable:	36W+42W+50W
Lumens:	3,960lm, 4,620lm, 5,500lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP42
Finish:	White
Materials:	Steel, PC
Lifespan:	50,000 hours
#10870	

#108/0 Mesh

Point CCT Fusion Troffer - 36-50W

Size:	47.7" L x 23.74" W x 3.9" D
Watt Adjustable:	36W+42W+50W
Lumens:	3,960lm, 4,620lm, 5,500lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP42
Finish:	White
Materials:	Steel
Lifespan:	50,000 hours
#10070	



Void CCT Fusion Troffer - 36-50W

Size:	47.7" L x 23.74" W x 4.5" D
Watt Adjustable:	36W+42W+50W
Lumens:	3,600lm, 4,200lm, 5,000lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP42
Finish:	White
Materials:	Steel
Lifespan:	50,000 hours










	CCT Edge-Lit Panel, 2x2 ft - 40W		
\succ	Size:	23.7" L x 23.7" W x 0.4" D	
	Watts:	40W	
	Lumens:	4,200lm	
	CCT Tunable :	3000K-4000K-5000K	
-	Voltage:	AC100-277V	
	Dimmable:	0-10V	
	IP Rating:	IP20	
	Finish:	White, Frosted	
-	Materials:	Aluminum, PMMA	
2	Lifespan:	50,000 hours	
	#10975 2x2 ft		

SES-FL22-K40-CCDD



1	CCT Edge-Lit Panel, 2x4 ft - 50W		
	Size:	23.74″ L x 47.8″ W x 3.9″ D	
	Watts:	50W	
	Lumens:	5,250lm	
-	CCT Tunable :	3000K-4000K-5000K	
1	Voltage:	AC120-277V	
	Dimmable:	0-10V	
	IP Rating:	IP20	
	Finish:	White, Frosted	
	Materials:	Aluminum, PMMA	
L.	Lifespan:	50,000 hours	
2	#10976 2x4 ft		





CCT Troffer, 2x2 ft - 24-36W


$ \ge $	Size:	23.7" L x 23.7" W x 1.8" D
-	Watts Switch:	24W + 36W
	Lumens:	3,000lm - 4,500lm
V	CCT Tunable:	3000K-4000K-5000K
	Voltage:	AC100-277V
	Dimmable:	0-10V
	IP Rating:	IP20
	Finish:	White, Frosted
	Materials:	Steel, PC
	Lifespan:	50,000 hours
	#10978 2x2 ft	




20

INTERIOR LED TROFFERS & PANELS







CCT T-Bar Panel, 2x2 ft- 20-40W

AC120-277V
0-10V
IP40
White, Frosted
Aluminum, PC
50,000 hours

#10971 2x2 ft





CCT T-Bar Panel, 2x4 ft - 40-60W

Size:	48" L x 24" W x 0.6" D
Watt Adjustable:	40W+50W+60W
Lumens:	4,400lm, 5,500lm, 6,600lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP40
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10972	

#10972 2x4 ft





CCT Troffer - 36-40W

Size:	47.7" L x 23.7" W x 4.5" D
Watt Adjustable:	36W+42W+50W
Lumens:	4,500lm, 5,250lm, 6,250lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-277V
Dimmable:	0-10V
IP Rating:	IP20
Finish:	White, Frosted
Materials:	Steel, PC
Lifespan:	50,000 hours











LED LINEAR & **TUBE LIGHTS**


SARIN's LED Tube

Lights are used in a variety of applications. Replace old fluorescent tube lighting with new, energy efficient T8s. Most linear lights can have a clear, striped, or frosted lens. Phantom Lights add flair to any indoor area with the ability to change color temperature and dim.

Applications:

- Offices
- Schools
- Grocery Stores
- Convenience Stores

Tubes are sold separately for fixtures that require them

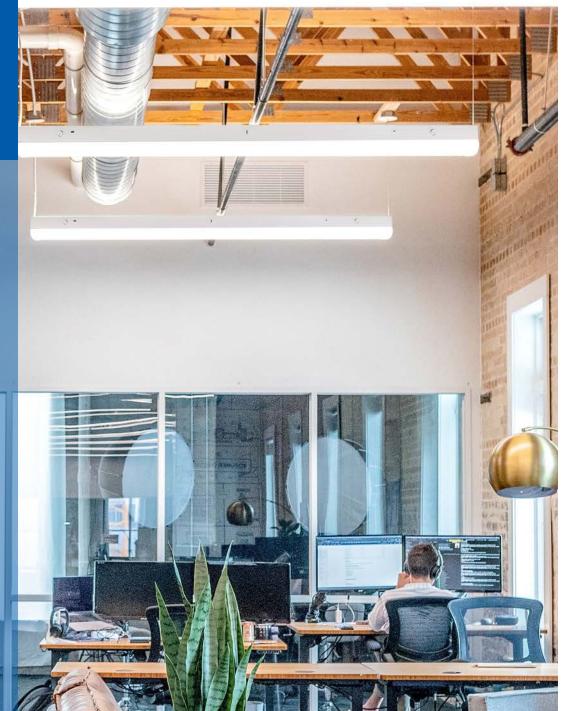









INTERIOR LED LINEAR & TUBE LIGHTS













CCT Linear Strip, 2 ft - 20W

Size:		24″ L x 3.2″ H x 2.9″ D	
Watts:		20W	
Lumens:	i	2,300-2,500lm	
CCT Tunable:		3000K-4000K-5000K	
Voltage:		AC120-277V	
Dimmable:		0-10V	
IP Rating:		P65	
Finish: White		White	
Materials: Aluminum		Aluminum	
Lifespan: 50,000 hours		50,000 hours	
#11119 2 ft	#13030 Motion Sensor	#13031 Backup Driver	

Optional: 180° Connector, Mount

CCT Linear Strip, 4 ft - 20-40W

-		
Size:		48" L x 3.2" H x 2.9" D
Watt Adj	ustable:	20W + 30W + 40W
Lumens:		4,700-5,200lm
CCT Tunable:		3000K-4000K-5000K
Voltage:		AC120-277V
Dimmable:		0-10V
IP Rating:		IP65
Finish: White		White
Materials: Aluminum		
Lifespan: 50,000 hours		
#11120	#13030	#13031
4 ft	Motion Sense	or Backup Driver

Optional: 180° Connector, Mount

Motion Sensor Backup Driver

CCT Linear Strip, 8 ft - 50-70W

Size:	96" L x 3.2" H x 2.9" D	
Watt Adjustable:	50W + 60W + 70W	
Lumens:	8,200-9,300lm	
CCT Tunable:	3000K-4000K-5000K	
Voltage:	AC100-277V	
Dimmable:	0-10V	
IP Rating:	IP65	
Finish:	White	
Materials:	Aluminum	
Lifespan:	50,000 hours	
	#10001	
#11121 #13030	#13031	

8ft Motion Sensor

#13031 Backup Driver

23

Optional: 180° Connector, Moun










1	H

Integrated Tube Light, 2 ft - 10W		
Size:	24" L x 1.2" W x 1.5 H	
Watts:	10W	
Lumens:	1,200lm	
CCT Tunable:	5000K	
Voltage:	AC100-277V	
Dimmable:	Non-Dimming	
IP Rating:	IP20	
Finish:	White	
Materials:	Aluminum, PC	
Lifespan:	50,000 hours	
#10146 #10159 Striped Clear		





	Integrated Tube Light, 3 ft - 14W		
1	Size:	36" L x 1.2" W x 1.5 H	
	Watts:	14W	
1	Lumens:	1,680lm	
	CCT Tunable:	5000K	
S	Voltage:	AC100-277V	
•	Dimmable:	Non-Dimming	
	IP Rating:	IP20	
	Finish:	White	
	Materials:	Aluminum, PC	
	Lifespan:	50,000 hours	
	#10147 #10158 Striped Clear		
	· · · · · · · · · · · · · · · · · · ·		



1	Integrated Tube Light, 4 ft - 22W		
	Size:	48" L x 1.2" W x 1.5 H	
-/	Watts:	22W	
	Lumens:	2,420lm	
2	CCT Tunable:	4000K, 6500K	
歴	Voltage:	AC100-277V	
by pea	Dimmable:	Non-Dimming	
	IP Rating:	IP20	
	Finish:	White	
	Materials:	Aluminum, PC	
	Lifespan:	50,000 hours	
	#10149 #10151 Frosted Clear		








Get Inspired

24

M³ INSPIRATION MODERN. MAGNETIC. MODULAR.





















	Integrated	d Tube
p /	Size:	
f-fills	Watts:	
-	Lumens:	
1	CCT Tunak	ole:
DITE OF THE PARTY OF THE REAL OF	Voltage:	
	Dimmable	:
	IP Rating:	
	Finish:	
	Materials:	
	Lifespan:	
	#10150 Clear	#10152 Striped

Light, 8 ft - 60W

A	Size:	24" L x 1.2" W x 1.5 H
12	Watts:	60W
	Lumens:	7,500lm
	CCT Tunable:	5000K
	Voltage:	AC100-277V
<u> 122 821 8</u>	Dimmable:	Non-Dimming
	IP Rating:	IP20
	Finish:	White
	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
	#10150 Clear Striped	





Parabolic Troffer - T8



SES-TP5FT-5000-60 (5 Ft)

D CODUS CE



SES-2FTANT SES-ATLL318T8RCI*3 LAMP SES-4FTANT SES-2X4 PARABOL



IC	
-	




Size:		2x2' 2x4'
Watts:		Bulb Dependent
Bulb:		T8 Tube
CCT Tunab	le:	Bulb Dependent
Voltage:		AC90-277V
Dimmable:		Non-Dimming
IP Rating:		IP20
Finish:		Chrome
Materials:		Aluminum
Lifespan:		50,000 hours
#10241	#10242	
2x2 ft	2x4 ft	

CUL US

INTERIOR LED LINEAR & TUBE LIGHTS





Size:	5' L x 3.3" W x 3.1" H
Watts:	60W
Lumens:	7,500lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	White, Frosted
Materials:	Aluminum, PMMA
Lifespan:	50,000 hours
#10129 60W	







Size:	4′ L x 3.3″ W x 3.1″ H
Size:	4 L X 3.3 VV X 3.1 H
Watts:	40W
Lumens:	5,480lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP66
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10172 40W	



Tri-Proof Light, 5 ft - 80W

Size:	5' L x 3.3" W x 3.1" H
Watts:	80W
Lumens:	10,400lm
CCT Tunable:	5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP66
Finish:	White, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours











	Size:
	Watts
	Lumer
	CCT:
	Voltag
	Dimme
de	IP Rat
ab -	Finish
	Mater
	Lifesp
	#10116 18W

T5 Tube Light Green, 4 ft - 18W

Size:	48" L x 0.9" W x 0.9" H
Watts:	18W
 Lumens:	2,900lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	Silver, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10116 18W Optional:	Rotating Cap, 9W, 15W, 24W, Color

SES-2T8-6500-10 CUL US



Cooler Ligh	t, 5 ft ·	- 32W
Size:		58.7″ L
Watts:		32W
Lumens:		3,310In
CCT:		3000K
Voltage:		AC90-
Dimmable:		Non-Di
IP Rating:		IP44
Finish:		White,
Materials:		Alumin
Lifespan:		50,000
#10160	#10162	#10

	Coolei	Light,	510	
2				
	-			

TA	Size:		58	3.7" L x 0.5" W x 0.5" H
	Watts:		32	2W
1	Lumens:		З,З	310lm
3	CCT:		30	000K, 4000K, 5000K
	Voltage:		AC	C90-277V
	Dimmable:		No	on-Dimming
	IP Rating:		IP	44
	Finish:		W	hite, Clear
	Materials:		Al	uminum, PC
	Lifespan:		50),000 hours
	#10160 5000K	#10162 4000K		#10167 3000K







.

Cooler Light, 6 ft - 40W

70.6" L x 0.5" W x 0.5" H
40W
4,780lm
5000K
AC90-277V
Non-Dimming
IP44
White, Clear
Aluminum, PC
50,000 hours









T8 Tube Light, 2 ft - 10W

Size:	23.7" L x 1.1" W x 1.1" H
Watts:	10W
Lumens:	1,100lm
CCT:	6500K
Voltage:	AC100-277V
Dimmabl	e: Non-Dimming
IP Rating	: IP20
Finish:	Silver, Clear
Material	s: Aluminum, PC
Lifespan	: 50,000 hours
#10100 6500K	Optional: Rotating Cap, 9W, 15W, 24W





T8 Tube Light, 3 ft - 15W

Size:		35.6″ L x 1.1″ W x 1.1″ H
Watts:]	15W
Lumens:]	l,600lm
CCT:	Ę	5000K, 6500K
Voltage:	1	AC100-277V
Dimmable:	1	Non-Dimming
IP Rating:	I	P20
Finish:	Ş	Silver
Materials:	/	Aluminum, PC
Lifespan:	Ę	50,000 hours
#10101 5000K SE	#10102 6500K SE Frosted	SE: Single-Ended Optional: Frosted Lens, Striped Lens





T8 Tube Light, 4 ft - 18W

Size:	47.8″ L x 1.1″ W x 1.1″ H
Watts:	18W
Lumens:	4,780lm
CCT:	3500K, 4000K, 5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	Silver
Materials:	Aluminum, PC
Lifespan:	50,000 hours

#10122 3500K DE

#10123 #10104 4000K DE 5000K DE

29

DE: Double-Ended Optional: Frosted Lens, Striped Lens, 12W, 22W





SES-WR03-CCT-40-D



ССТ

		11
6)		
1		-
1	~	
-		_
		and the second se

Linear Wraparound Fixture, 47in - 40W

and the second		
and the second s	Size:	47.4" L x 5.4" W x 2.5" H
	Watts:	40W
	Lumens:	3,400lm
	CCT:	3000K-4000K-5000K
	Voltage:	120-277V
	Dimmable:	Non-Dimming
	IP Rating:	IP20
	Finish:	White
	Materials:	Steel, PC
	Lifespan:	50,000 hours
	#10828 40W	

Linear Wraparound Dimmable Fixture, 47in - 40W

	Size:	47.4" L x 5.4" W x 2.5" H
4	Watts:	40W
	Lumens:	3,400lm
	CCT:	3000K-4000K-5000K
and the second second	Voltage:	120-277V
	Dimmable:	0-10V
_	IP Rating:	IP20
STREET, SQUARE,	Finish:	White
	Materials:	Steel, PC
	Lifespan:	50,000 hours
200	#10829	

Linear Wraparound Emergency Backup Fixture, 47in - 40W





Size:	47.4" L x 5.4" W x 2.5" H
Watts:	40W
Lumens:	3,400lm
CCT:	3000K-4000K-5000K
Voltage:	120-277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	White
Materials:	Steel, PC
Lifespan:	50,000 hours



Dimmable



ENVISION LINEAR PROFILE EXTRUSIONS

Browse Selection



LED **HIGH BAY** LIGHTS

SARIN's LED High Bays are built from strong materials that are safe for use in extreme temperatures. They are perfect for areas with high ceilings that would be difficult to light up efficiently with typical ceiling lights.

Applications:

- Warehouses
- Factories
- Exhibition Halls
- Gymnasiums







SES-HB11-150WZXYA1-abcdef SES-HB11-240WZXYA1-abcdef



c Un us

INTERIOR LED

HIGH BAY LIGHTS













UFO High Bay - 150W

Size:		12.2" W x 7.3" H
Watts:		150W
Lumens:		21,640lm
CCT:		4000K, 5000K
Voltage:		AC100-277V
Dimmable:		1-10V
IP Rating:		IP65
Finish:		Black or White
Materials:		Aluminum, Glass
Lifespan:		50,000 hours
#10294	#10296	

#10354*

5000K B

With Emergency Drive



5000K B

Optional: Finish, Motion Sensor, Cove

UFO High Bay - 240W

Size:		14.6" W x 7.9" H		
Watts:		240W		
Lumens:		31,000-35,000lm		
CCT:		4000K, 5000K		
Voltage:		AC100-277V		
Dimmable:	1-10V			
IP Rating:	IP65			
Finish:	Black or White			
Materials:		Aluminum, Glass		
Lifespan:		50,000 hours		
#10337 4000K				
#10336 5000K	#10336 5000K	#10354* With Emergency Driver 5000K B		

Optional: Finish, Motion Sensor, Cover

UFO High Bay - 150W & 240W

Size:		14.7" W x 7.44" H
Watts:		150W, 240W
Lumens:		150W: 19500-21700lm 240W: 31200-34800lm
CCT:		5700K
Voltage:		AC120 - 277V
Dimmable:		1-10V
IP Rating:		IP65
Finish:		Black
Materials:		Aluminum
Lifespan:		50,000 hours
#10776 150W	#10777 240W	







Side No.	Size:
	Watts
	Lume
THE LEWIS	CCTT
	Volta
	Dimm
	IP Rat
	Finish
	Mater
	Lifesp
	#11115 150W

1.1.4

UFO High Bay CCT Tunable - 150W & 240W

	UFO High Bay CCT Tunable - 150W & 240W	
	Size:	14.7" W x 7.4" H
	Watts:	150W, 240W
	Lumens:	150W: 22000-23400lm 240W: 35000-37400m
Martin Call	CCT Tunable:	4000K-5000K
	Voltage:	AC120 - 277V
	Dimmable:	1-10V
	IP Rating:	IP65
	Finish:	Black
	Materials:	Aluminum
	Lifespan:	50,000 hours
	#11115 #11116 150W 240W	Optional: Motion Sensor





No la	Linear High Bay - 110W, 165W		
	Size:		24.6" L x 11.8" W x 2" H
	Watts:		110W, 165W
	Lumens:		110W: 14,000-15,000lm 165W: 21,000-22,500lm
	CCT:		5700K
	Voltage:		AC100-277V
	Dimmable:		1-10V
	IP Rating:		IP65
	Finish:		White
	Materials:		Iron
	Lifespan:		50,000 hours
	#10778 110W	#10779 165W	

Linear High Bay - 220W 24.5" L x 14.25" W x 2" H Size: Watts: 220W 28,500-29,500lm Lumens: 5700K CCT: AC100-277V Voltage: 1-10V Dimmable:

#11118

220W

IP Rating:	IP65
Finish:	White
Materials:	Iron
Lifespan:	50,000 hours







34

INTERIOR LED

HIGH BAY LIGHTS

22.3" L x 13.4" W x 1.5" D













Flexible High Bay - 75W

75W

9,000lm

AC100-240V

Non-Dimming

Aluminum, PC

50,000 hours

5000K

IP40

White

Size:

Watts:

Lumens: CCT:

Voltage: **Dimmable:**

IP Rating:

Lifespan:

#10316 2′, 75W

Finish: **Materials:**

Size:	45.9" L x 13.4" W x 1.5" D
Watts:	150W
Lumens:	18,000lm
CCT:	5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP40
Finish:	White
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10317 4', 150W	





Flexible High Bay - 210W

Size:	45.9" L x 19.2" W x 1.5" D
Watts:	210W
Lumens:	25,200lm
CCT:	5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP40
Finish:	White
Materials:	Aluminum
Lifespan:	50,000 hours












	UF
E O E	Si
0	W
	Lu
	C
	Lu Ce Ve
	Di
	IP
(+)	Fi
	Μ
	Li
	#

UFO High Bay CCT Tunable, Watt Adjustable	
Size:	11″/13.4″ W x 5.7″ H
Watt Adjustable:	100W+120W+150W 180W+200W+240W
Lumens:	20,250 - 33,600lm
CCT Tunable:	3500K-4000K-5000K
Voltage:	AC120 - 277V
Dimmable:	0-10V
IP Rating:	IP65
Finish:	Black
Materials:	Aluminum
Lifespan:	50,000 hours
#11345 #11346 Low Watt High Wat	t





Size:	11" W x 5.5" H
Watts:	150W
Lumens:	15,750lm
CCT Tunable:	5700K
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Black
Materials:	Aluminum
Lifespan:	30,000 hours
#11347	




Size:	24.8″ L x 12.2/14.5″ W x 1.5″ H
Watt Adjustable:	130W+150W+165W 255W+275W+300W
Lumens:	22,597 - 41,032lm
CCT Tunable:	4000K-5000K
Voltage:	AC120 - 277V
Dimmable:	0-10V
IP Rating:	IP20
Finish:	White
Materials:	Iron, Aluminum
Lifespan:	50,000 hours
#11348 Low Watt High Wat	t





Want to find something new? Search our website for any of our products!



INTERIOR LED HIGH BAY LIGHTS







#11348 Low Watt	#11349 High Watt	
Lifespan:		50,000 hours
Materials	:	Iron, Aluminum
Finish:		White
IP Rating:		IP20
Dimmable	:	0-10V
Voltage:		AC120 - 277V
CCT Tuna	ble:	4000K-5000K
Lumens:		17,550-43,500lm
Watt Adju	ıstable:	130W+150W+165W 255W+275W+320W
Size:		18.1" L x 11.8" W x 1.9" H 23" L x 12.6" W x 1.9" H





Linear High Bay - 600W

Size:	46" L x 12.6" W x 2"H
Watts:	600W
Lumens:	80,000 - 82,000lm
CCT Tunable:	5700K
Voltage:	AC120 - 277V
Dimmable:	0-10V
IP Rating:	IP20
Finish:	White
Materials:	Iron, Aluminum
Lifespan:	50,000 hours





×



LED EXIT & EMERGENCY

SARIN's Exit and Emergency Lights are made from durable, fire-proof materials. With at least 90 minutes of backup power, you can be sure that these lights will reliably guide your staff and guests to safety.

Applications:

- Offices
- Hotels
- Stores
- Hospitals



SES-EX7008RD - 2W SES-EX7008RS - 2W SES-EX7008GS







INTERIOR LED EXIT AND EMERGENCY







Reflective Edge-Lit Exit Sign - 2W







Size:	11.7" W x 12" H x 3.8" D
Watts:	5W
Lumens:	300lm
CCT:	6500K
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	White
Materials:	Aluminum, ABS
Lifespan:	50,000 hours
#10917 Two Sides	





Classic Exit Sign - 1W

Size:	11.8" W x 7.3" H x 1.8" D
Watts:	1W
Voltage:	AC120 - 277V
Dimmable:	1-10V
IP Rating:	IP65
Backup Time:	≥90 minutes
Mounting:	Wall, Side, Ceiling
Finish:	White
Materials:	Aluminum
Lifespan:	50,000 hours











Emergency Driver	r, Small - 8W
Size:	9.3″ L x 2″ W x 1.8″ H
Max Watts:	8W
Compatible With:	3W, 5W, 8W
Voltage:	AC100-277V
Illumination Time:	90 Minutes
IP Rating:	IP42
Recharge Time:	24 Hours
Battery:	Ni-MH
Lifespan:	5 Years
#10906 8W	
Suitable for LED product with int	ernal driver.

PERF PERF Dealer M. Inc. Occurs TEST Call Coll C



	Emergency Driver	r, Medium - 20W
	Size:	15" L x 2.2" W x 1.3" H
j ®	Max Watts:	20W
	Compatible With:	10W, 15W, 20W
13	Voltage:	AC100-277V
	Illumination Time:	90 Minutes
	IP Rating:	IP42
	Recharge Time:	24 Hours
	Battery:	Ni-MH
3	Lifespan:	5 Years
	#10904 20W	
	Suitable for LED product with int	ernal driver.



	Emergency Driver, Medium - 20W		
	Size:	15" L x 3" W x 3" H	
	Max Watts:	25W	
	Compatible With:	Up to 125W	
	Voltage:	AC100-277V	
	Illumination Time:	90 Minutes	
	IP Rating:	IP42	
	Recharge Time:	48 Hours	
	Battery:	Ni-Cd	
	Life Expectancy:	7-10 Years	
	#10905 25W		
	Suitable for LED product with int	ernal driver.	

SES-EX7006-W





40

INTERIOR LED EXIT AND EMERGENCY


EXIT



Size:	12.6" W x 8" H
Watts:	ЗW
Voltage:	AC120-277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Reflective, White
Backup Time:	≥90 minutes
Battery:	3.6V 500mAh Ni-Mh
Materials:	Aluminum, ABS
Lifespan:	25,000 Hours
#10798 Two Sides	







Size:	14.8″ Lx 2.7″ Wx 2.9″ H
Max Watts:	18W
Compatible With:	8W, 14W, 18W
Voltage:	AC120-277V
Power Time:	90 Minutes
IP Rating:	IP20
Recharge Time:	40 Hours
Battery:	Ni-Cd
Lifespan:	5 Years
#10742 18W	





Emergency Driver, Medium - 20W

Size:	12.9" L x 2" W x 1" H
Max Watts:	20W
Compatible With:	10W, 15W, 20W
Voltage:	AC100 - 347V
Illumination Time:	90 Minutes
IP Rating:	IP20
Recharge Time:	24 hours
Battery:	Li-ion
#40229-C 20W	







	Outdoor I
	Size:
	Watts:
	Lumens:
	CCT:
	Voltage:
	Dimmable
	IP Rating:
	Finish:
60	Materials
	Lifespan:
	#10907

Emergency Light - 4W

(file	Size:	12.3" L x 5.2" W x 4.2" H
	Watts:	4W
	Lumens:	400lm
	CCT:	6000K
	Voltage:	AC120 - 277V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	White
	Materials:	ABS
Lifespan:	15,000 hours	
	#10907 6000K	







Emergency Light - 2.5W

t	- 2.5W
	10.3" L x 2.3" W x 4" H
	2.5W
	182lm
	5700K
	AC120 - 277V
	Non-Dimming
	IP20
	White
	ABS
	25,000 hours





Emergency Light - 2.4W

Size:	13.7" L x 3.5" W x 4.3" H
Watts:	2.4W
Lumens:	240lm
CCT:	7000-9000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	White
Materials:	ABS
Lifespan:	25.000 hours





INTERIOR LED EXIT AND EMERGENCY







Size:	19.8" L x 8" H x 4.4" D
Watts:	4.2W
Lumens:	≥220lm
CCT Tunable:	6000K
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	White
Materials:	ABS
Lifespan:	5,000 hours
#11147 4.2W	



Emergency Light - 2.4W

Size:	9.45" L x 6.5" W x 4.53" D
Watts:	2.4W
Lumens:	≥200m
CCT:	6000±500
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	Gray
Materials:	Aluminum, ABS
Lifespan:	5,000 Hours
#111.40	

#11148 2.4W



Emergency Light - 2.4W

Size:	8.4" L x 4.25" W x 3" D
Watts:	2.4W
Lumens:	≥200
CCT:	6000±500
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	Gray
Materials:	ABS
Lifespan:	5,000 Hours

#11149 2.4W







Size:	12.3" L x 5.2" W x 4.2" H
Watts:	12W
Lumens:	1,000lm
CCT Tunable:	6500-7500K
Voltage:	AC120 - 277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum, Glass
Lifespan:	35,000 hours





SARIN BROAD-SPECTRUM LED GROW LIGHT

SARIN BROAD-SPECTRUM LED GROW LIGHTS produce more light compared to traditional HPS and HID counterparts while consuming far less energy and emitting less heat.

They are super slim and lightweight, making for easy installation and adjustability without compromising light quality.

To learn more, visit www.sarinenergy.com/green



SARIN

LED CHANNEL & STRIP LIGHTS

SARIN's LED Channel and Strip Lights are widely used in a variety of applications. From cove and accent lighting to under cabinet, task, landscaping, and even architectural lighting, we have a strip light to suit your needs. Our flexible lights can be cut to fit in nearly any location.

Applications:

- Coves
- Under Cabinets
- Hallways
- Accents
- Landscaping
- Hotels
- Restaurants
- Stores

5







SES-SLL-UL-67-3000 SES-SLL-UL-67-5000



CUDUS CE

INTERIOR LED

CHANNEL & STRIP LIGHTS













Pixel RGB Strip Light - 6.1W/ft

Size:	16.4' L x 0.4" W x 0.1" H
Watts:	6.1W/ft
Lumens:	230lm/ft
CCT:	RGB
Voltage:	DC12V
Dimmable:	PWM
IP Rating:	IP67
Cutting Length:	0.75″
Materials:	Silicone, PCB
LED Quantity:	18 LED/ft

#11177 RGB

Classic Series Strip Light - 14.4W/M

Size:	16.4	lft/Roll, 10mm PCB	
Watts:	14.4W/M		
Lumens:	3,500lm/W		
CCT:	3000K, 4000K, 5700K		
Voltage:	24V		
Dimmable:	Yes		
IP Rating:	IP65		
Finish:	White		
Materials:	Silicone Tubing / PCB		
Lifespan: 50,000 hours			
#51004 3000K	#51006 4000K	#51007 5700K	

Ultra-Long Strip Light - 11W/M

Size:	65.6ft/Roll, 10mm PCB	
Watts:	11W/M	
Lumens:	690lm/M, 730lm/M	
CCT:	3000K, 5000K	
Voltage:	24V	
Dimmable:	Dimmer	
IP Rating:	IP67	
Finish:	White	
Materials:	Silicone Extrusion, PCB	
Lifespan:	50,000 hours	
#51008 3000K	#51009 5000K	



47





	High CRI CI
	Size:
	Watts:
	Lumens:
	CCT:
	Voltage:
	Dimmable:
	IP Rating:
	Finish:
NA	Materials:
Sin C	Lifespan:
· ·	#51005

High CRI (Classic Strip Light - 14W/M
C .	

Size:	16.4ft/Roll
Watts:	14W/M
Lumens:	1,500lm
CCT:	RGB
Voltage:	110-130V
Dimmable:	TRIAC
IP Rating:	IP65
Finish:	White
Materials:	Silicone Tubing/PCB
Lifespan:	50,000 hours
#51005 High CRI	





	CCT Tunable Strip Light - 14W/M	
	Size:	16.4ft/Roll
	Watts:	14W/M
	Lumens:	1,150lm
1	CC Tunable:	2700K-6500K
	Voltage:	110-130V
	Dimmable:	TRIAC
	IP Rating:	IP67
	Finish:	White
	Materials:	Silicone Tubing/PCB
	Lifespan:	50,000 hours
	#51010 CCT	





1	RGBWW Tunable Strip Light - 14W/M	
	Size:	16.4ft/Roll
	Watts:	14W/M
	Lumens:	820lm
	CCT:	RGB+2700K+6500K
	Voltage:	24VDC
	Dimmable:	APP/ Remote
	IP Rating:	IP65
	Finish:	White
	Materials:	Silicone Tubing/PCB
	Lifespan:	50,000 hours
	#51011 RBGWW	



48


INTERIOR LED

CHANNEL & STRIP LIGHTS









Size:	18.9" L x 9.4" W
Watts:	90 W/Sheet
Lumens:	4,240lm/Sheet
CCT:	2700K-6500K RGBW (2700K)
Voltage:	24V
Dimmable:	Yes
IP Rating:	IP54
Finish:	White
Materials:	Nano Coated PCB
Lifespan:	50,000 hours
	003 CT

Continuous Strip Light- 12W/M

Size:	16.4ft/Roll, 10mm PCB
Watts:	12W/M
Lumens:	1,020lm
CCT:	2700K
Voltage:	24V
Dimmable:	Yes
IP Rating:	IP67
Finish:	White
Materials:	Silicone Extrusion / PCB
Lifespan:	50,000 hours
#51014	







Continuous Strip Light- 20W/M

Size:	16.4ft/Roll, 10mm PCB
Watts:	20W/M
Lumens:	600lm
CCT:	RGBW (2700K)
Voltage:	24V
Dimmable:	Yes
IP Rating:	IP67
Finish:	White
Materials:	Silicone Extrusion / PCB
Lifespan:	50,000 hours












Single Colo
Size:
Watts:
Lumens:
CCT:
Voltage:
Dimmable:
IP Rating:
Finish:
Materials:
Lifespan:
#10657 5000K

or Neon Flex - 10W/M

Size:	164' L x 0.4" W x 0.6" H	
Watts:	10W/M	
Lumens:	N/A	
CCT:	3000K, 5000K	
Voltage:	110-130V	
Dimmable:	TRIAC	
IP Rating:	IP65	
Finish:	White, Frosted	
Materials:	PVC, SMD, Copper	
Lifespan:	50,000 hours	
#10657 5000K	#10658 3000K	
	Watts: Lumens: CCT: Voltage: Dimmable: IP Rating: Finish: Materials: Lifespan: #10657	





	Ultra Neon	Flex - 3	W, 4.2W	
	Size:	164' l	_ x 0.8″W x	0.6″ H
	Watts:	3W, 4	4.2W	
	Lumens:	Top B Side B	end: 20-22 3end: 10-120	5lm/ft Dlm/ft
	CCT:	White/F	Red/Green/Blue/	Amber/Pink
	Voltage:	AC110	0-120V	
	Dimmable:	TRIA	С	
	IP Rating:	IP65		
and a second	Materials:	Silico	ne, Copper	-
W KX	Lifespan:	50,00	00 hours	
昌/星	#30745 900XD	#30746 901XD	#30747 Blue	
71	#30748	#30749	#30750	

RGB Neon Flex - 10W/M

6000K Amber

	Size:	164' L x 0.4" W x 0.6" D
	Watts:	10W/M
	Lumens:	86lm
	CCT:	RGB
X	Voltage:	110-130V
	Dimmable:	TRIAC
	IP Rating:	IP65
	Finish:	White
	Materials:	Materials PVC, PCB Board
	Lifespan:	50,000 hours
	#10650 RGB	

Red







INTERIOR LED CHANNEL & STRIP LIGHTS













High Output AC Modules - 3W

Size:	4.1″ L	4.1" L x 0.9" W x 0.2" D		
Watts:	ЗW			
Lumens:	350-	350-390lm / Module		
CCT:		3000K, 5000K, 6000K, Blue, Green, Purple, Red, Pink		
Voltage:	AC110	AC110V		
Dimmable	TRIAC			
IP Rating:	IP54			
Materials:	Aluminum, ABS			
Lifespan:	ifespan: 30,000 hours			
#10930 Blue	#10931 3000K	#10933 6000K	#10935 5000K	
#30904 Green Available in 4000K	#30905 Purple , 9000K, Orange	#30909 Red	#30910 Pink	

Flexible Strip Light Kits

~	10.46	
Size:	16.4ft/Roll, 10mm PCB Width	
Watts:	7.2W/M, 14.4W/M	
Lumens:	1,450 - 1,510lm	
CCT:	3000K, 4000K, 5000K	
Voltage:	24VDC	
Dimmable:	RF	
IP Rating:	IP65	
Finish:	Black	
Materials:	Silicone Tubing / PCB	
Lifespan:	50,000 hours	
#11056 3000K	#11057 4000K	#11058 5000K
#11059 RGBW	#51012 7.2W/M	

Slim Strip Light - 14.4W/M

Size:	16.4ft/Roll, 5mm PCB Width
Watts:	14.4W/M
Lumens:	1,780lm
CCT:	2700K
Voltage:	24VDC
Dimmable:	Yes
IP Rating:	IP20
Finish:	White
Materials:	Silicone Tubing / PCB
Lifespan:	50,000 hours
#51013	





SARIN

LED SPECIALTY LIGHTS

SARIN's Specialty Lights cover a diverse category of lighting hardware. These products can be used for to draw attention to building aesthetics or just add a little more functionality to rooms.

Applications:

- Homes
- Hotels

Stores

5 • WARRANTY *

Restaurants

Bulbs are sold separately for fixtures that require them.

GUARANTEED

3 COLORS





Furni



INTERIOR LED

SPECIALTY LIGHTS













Track Head - E26

Size:	6.5" L x 2" W x 4" H		
Bulbs:	A19, PAR20, BR, PAR38		
Base:	E26		
CCT:	5700K		
Voltage:	AC120V		
Dimmable:	TRIAC		
IP Rating:	IP40		
Finish:	White, Black		
Materials:	Aluminum, PC		
Lifespan:	15,000-25,000 hours		
#10740 White	#10741 Black	#11161 Black 180	#11162 Black 181

#11163 Black 276

Track Rails

Size:	3.3′ / 4′ / 6′ / 8′		
Voltage:	AC120V		
System:	3 Wire		
Materials:	Aluminum		
Finish:	Black / White		
Included:	Mounting Screws		
#10737 8' White	#10762 6' White	#10765 3' White	
#10738 3' Black	#10763 6' Black	#10766 4' White	
#10739 4' Black	#10764 8' Black		

Portable Light, CHB04B - 100W

Size:	5.5" L x 10.4" H x 5.9" D	
Watts:	100W	
Lumens:	14,500lm	
CCT:	5700K	
Voltage:	AC120	
Dimmable:	Segmented Dimming & 2.4G Wireless Dimming	
IP Rating:	IP65	
Finish:	Yellow, Silver	
Materials:	Aluminum, PC	
Lifespan:	50,000 hours	










Linkable CCT Under Cabinet Lights			
	Size	Watts	Lumens
11250	3.3" L x 0.7" W	1W	80lm
11251	10.2" L x 0.7" W	3.5W	320lm
11252	19.7" L x 0.7" W	6.5W	560lm
11253	39.4" L x 0.7" W	13W	1,000lm
CCT:	3000	OK-4000	ОК-5000К
Voltag	e: DC2	4V	
Dimma	ble: Pres	s or Sen	sor
IP Rati	ng: IP20		
Finish:	Whit	e, Silver	•
Materi	als: Alum	ninum, P	С
Lifespo	in: 50.0	00 hour	·s

SES-LNWW-RGBW

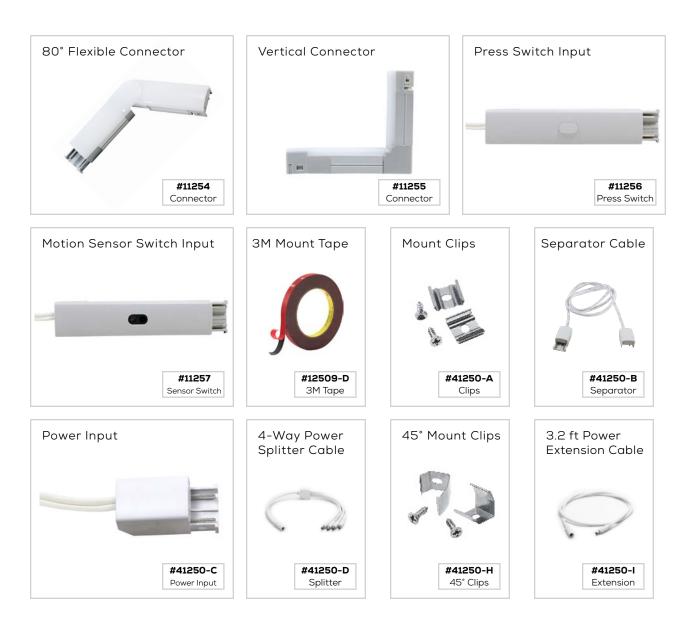



INTERIOR LED SPECIALTY LIGHTS











Linear Wall Washer - 3W, 7.5W, 12W

Size:	6"/12"/38.2" W x 1.2" H x 0.6" D			
Watts:	3W, 7.5W, 12W			
Lumens:	54lm,	541m, 1351m, 2161m		
CCT:	RGB-	RGB-3000K-4000K- 6000K		
Voltage:	DC24V			
Dimmable:	DMX512			
IP Rating:	IP65			
Materials:	Aluminum, PMMA			
Finish:	White, Frosted			
Lifespan:	30,000 hours			
#11230 3W	#11231 7.5W	#11232 12W		

USB Wall Plate, 2 Ports

Size:	2.8" W x 6.2 H x 1.4" D
USB:	2 Ports
LED:	Charging Indicator
Amp:	Max 21 Amps / USB
Voltage:	AC100 - 240V
IP Rating:	IP20
Materials:	Fire-Proof Plastic
Finish:	White
Lifespan:	30,000 hours





3D ILLUMINATED SURFACES

Create infinitely customizable 3D solid surface walls of any size with non-repeating and completely original designs.

See Examples

Waterproof Lighting for Every Situation

SARIN's exterior LED lamps are weather-proof and sure to light the way for years. Impress and welcome guests by bringing modern refinement to the rugged outdoors. It's time to take control of your exterior with radiant displays that have the power to captivate and turn night into day.

These lights are far more energy-efficient than standard halogen and metal halide lights. Whether you're looking to illuminate areas for safety or add a splash of color to enhance your architecture, SARIN has a solution for you! You can even use a photocell sensor with your lights so they automatically turn on at night to save you the hassle.

We are dedicated to ensuring that your lighting needs are met. Nearly all of our lights are available in color temperatures ranging from 2700-6500K. Many of our products can be custom ordered with various sizes, colors, wattages, accessories, diffusers, finishes, and features. For more information about optional customizations, call us at 855-997-2746.





LED WALL LAMPS

SARIN's LED Wall

Lamps are perfect for adding splashes of light or color to any wall. These lights are designed with style and durability in mind. They are sure to enhance the allure of your building for years to come! All of the lights in this section have optional finishes. 11 11

Applications:

- Hotels
- Restaurants
- Places of Worship
- Hospitals

Bulbs are sold separately for fixtures that require them.







NO. WE



EXTERIOR LED

WALL LAMPS













CCT Wall Sconce, WL217 - 12W

Size:	4.7" W x 18" H x 4.6" D
Watts:	12W
Lumens:	551lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	120V
Dimmable:	TRIAC
IP Rating:	IP54
Finish:	Black or Bronze
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11211 #112	19

Black

#11219 Bronze

CCT Wall Sconce, WL219 - 14W

Size:	4.7" W x 18" H x 4.6" D	
Watts:	14W	
Lumens:	882lm	
CCT Tunable:	3000K-4000K-5000K	
Voltage:	120V	
Dimmable:	TRIAC	
IP Rating:	IP54	
Finish:	Black or Bronze	
Materials:	Aluminum, Glass	
Lifespan:	30,000 hours	
#11212 #11220 Black Bronze		

CCT Wall Sconce, WL221 - 13W

Size:		4.7" W x 18" H x 2.4" D
Watts:		13W
Lumens:		448lm
CCT Tunable	e:	3000K-4000K-5000K
Voltage:		120V
Dimmable:		TRIAC
IP Rating:		IP54
Finish:		Black or Bronze
Materials:		Aluminum, Acrylic
Lifespan:		30,000 hours
#11213 Black	#11221 Bronze	









CCT Wall Sconce, WL225 - 12W

Size:	4.7" W x 18" H x 2.4" D
Watts:	12W
Lumens:	763lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	120V
Dimmable:	TRIAC
IP Rating:	IP54
Finish:	Black or Bronze
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11214 #11222	2







CCT Wall Sconce, WL228 - 15W			
Size:	7.8" W x 18" H x 3.8" D		
Watts:	15W		
Lumens:	336lm		
CCT Tunable:	3000K-4000K-5000K		
Voltage:	120V		
Dimmable:	TRIAC		
IP Rating:	IP54		
Finish:	Black or Bronze		
Materials:	Aluminum, Acrylic		
Lifespan:	30,000 hours		
#11215 #11223 Black Bronze			



	CCT Wall Sconce	CCT Wall Sconce, WL84 - 24W			
	Size:	6.1" W x 18" H x 8.3" D			
	Watts:	24W			
Part -	Lumens:	1,618lm			
and a	CCT Tunable:	3000K-4000K-5000K			
The second second	Voltage:	120V			
and the second	Dimmable:	TRIAC			
	IP Rating:	IP54			
the f	Finish:	Black or Bronze			
	Materials:	Aluminum, Acrylic			
	Lifespan:	30,000 hours			
	#11216 #1122 Black Bron:				





EXTERIOR LED

WALL LAMPS



Size:	4.7" W x 18" H x 6.6" D
Watts:	60W Max
Lumens:	Bulb Dependent
Bulb Type:	E26
Voltage:	120V
Dimmable:	Bulb Dependent
IP Rating:	IP54
Finish:	Black or Bronze
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11217 Black	#11225 Bronze











Size:		4.7" W x 18" H x 6.5" D	
Watts:		60W Max	
Lumens:		Bulb Dependent	
Bulb Type:		E26	
Voltage:		120V	
Dimmable:		Bulb Dependent	
IP Rating:		IP54	
Finish:		Black or Bronze	
Materials:		Aluminum, Glass	
Lifespan:		30,000 hours	
#11218 Black	#11226 Bronze		





CCT Wall Sconce, WL6011 - 7.5W

Size:	4.7" W x 6" H x 5.9" D
Watts:	7.5W
Lumens:	500lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	110-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Matte Black
Materials:	Aluminum, PC
Lifespan:	30,000 hours












ССТ

Size:	3.3" W x 10" H x 4.4" D
Watts:	13W
Lumens:	700lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	110-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Matte Black
Materials:	Aluminum, Acrylic
Lifespan:	30,000 hours













	CCT Wall Sconce, WL5651 - 13W		
	Size:	7.9" W x 10" H x 11.7" D	
	Watts:	13W	
-	Lumens:	550lm	
	CCT Tunable:	3000K-4000K-5000K	
	Voltage:	110-240V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP54	
	Finish:	Matte Black	
	Materials:	Aluminum, PC	
	Lifespan:	30,000 hours	
	#11243 CCT		



EXTERIOR LED

WALL LAMPS













CCT Wall Sconce, WL1961S - 13W

Size:	9.8″Wx7″Hx79″D
5126.	3.8 W X / 11 X /.3 D
Watts:	13W
Lumens:	900lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	110-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Matte Black
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#11244	



Wall Sconce, WL5382 - 10W

Size:	6.3" W x 5.6" H x 4.4" D
Watts:	10W
Lumens:	700lm
CCT Tunable:	3000K
Voltage:	110-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Matte Black
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11245	

3000K

Wall Sconce, WL5952 - 40W Max

40W Max
Bulb Dependent
E26
110-240V
Bulb Dependent
IP44
Matte Black
Aluminum, PC
30,000 hours





63







Wall Sconce, WL5581 - 40W Max

Size:	7.9" W x 20.5" H x 12.7" D
Watts:	40W Max
Lumens:	Bulb Dependent
Bulb Type:	E26
Voltage:	110-240V
Dimmable:	Bulb Dependent
IP Rating:	IP44
Finish:	Matte Black
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#11247 E26	








Wall Sconce, V	WL5213 - 2x60W Max
Size:	4.1" W x 12" H x 6.4" D
Watts:	2x60W Max
Lumens:	Bulb Dependent
Bulb Type:	E26
Voltage:	110-240V
Dimmable:	Bulb Dependent
IP Rating:	IP54
Finish:	Matte Black
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11248 E26	





	-,			
Size:		2ft, 4	ft, 6ft, oi	r 8ft
Watts:		8W, 1	.6W, 25V	V, or 35W
Lumens:		800lı	m-3500	m
ССТ		3000	Ж	
Voltage:		90-2	64V	
Dimmable:		No		
IP Rating:		IP65		
Finish:		Black		
Materials:		Alum	inum, Ac	rylic
Lifespan:		20,00	00 hours	
#11260 2ft	#11261 4ft	1	#11262 6ft	#11263 8ft
	Watts: Lumens: CCT Voltage: Dimmable: IP Rating: Finish: Materials: Lifespan: #11260	Watts:Lumens:CCTVoltage:Dimmable:IP Rating:Finish:Materials:Lifespan:#11260#11261	Watts: 8W, 1 Lumens: 800h CCT 3000 Voltage: 90-2 Dimmable: No IP Rating: IP65 Finish: Black Materials: Alum Lifespan: 20,00	Watts: 8W, 16W, 25W Lumens: 800Im-3500I CCT 3000K Voltage: 90-264V Dimmable: No IP Rating: IP65 Finish: Black Materials: Aluminum, Act Lifespan: 20,000 hours #11260 #11261





EXTERIOR LED

WALL LAMPS





Size:	6.7" L x 6.7" W x 3.2" D
Watts:	6.5W
Lumens:	400lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	30,000 hours

CCT Wall Sconce, WL2201 - 6.5W

#11151 CCT

Optional: Finish Color

CCT Wall Sconce, WL2027QM - 10W

Size:	4.7" L x 5.3" W x 3.9" D
Watts:	10W
Lumens:	600lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	White
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#11152	



Optional: Finish Color





CCT Wall Sconce, WL2027SM - 10W

Size:	4" L x 4" W x 4" D
Watts:	10W
Lumens:	450lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum, Glass
Lifespan:	30,000 hours

#11153 CCT

Optional: Finish Color









	CCT Wall Sconce	, WL2534X - 7W / 10W	
TRACTS	Size:	5.3"/7.1" W x 1.8" H	
	Watts:	7W, 10W	
: ••	Lumens:	300lm / 430lm	
	CCT Tunable:	3000K-4000K-5000K	
	Voltage:	AC100-240V	
110	Dimmable:	Non-Dimming	
	IP Rating:	IP54	
Finish:		Dark Gray	
	Materials:	Aluminum, PC	
	Lifespan:	30,000 hours	
	#11154 #11155 10W 7W	Optional: Finish Color	





	CCT Wall Scond	e, WL2501 - 6W
. T	Size:	5.5" L x 5.5" W x 2.6" D
	Watts:	6W
	Lumens:	130lm
-	CCT Tunable :	3000K-4000K-5000K
	Voltage:	AC100-240V
	Dimmable:	Non-Dimming
	IP Rating:	IP54
	Finish:	Bronze
	Materials:	Aluminum, PC
	Lifespan:	30,000 hours
	#11156 CCT Optional:	Finish Color



	CCT Wall Sconce, WL2012R - 7W		
	Size:	4.3" L x 4.3" W x 4.1" D	
	Watts:	7W	
	Lumens:	350lm	
	CCT Tunable :	3000K-4000K-5000K	
	Voltage:	AC100-240V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP54	
	Finish:	Dark Grey	
	Materials:	Aluminum, PC	
	Lifespan:	30,000 hours	
>	#11157 CCT Optional: F	inish Color	

SES-WL2013R-7-CCT ССТ CE



EXTERIOR LED

WALL LAMPS





Size:	4.7" L x 5.1" W x 5.3" D
Watts:	6.5W
Lumens:	280lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Light Grey
Materials:	Aluminum, PC
Lifespan:	30,000 hours

CCT Wall Sconce, WL2551 - 6.5W

#11150 CCT

Optional: Finish Color

CCT Wall Sconce, WL2013R - 7W





Size:	4.3" L x 4.3" W x 4.3" D
Watts:	7W
Lumens:	260lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Dark Grey
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#11159 CCT Optional: Fir	nish Color







CCT Wall Sconce, WL2013S - 7W

Size:	4.3" L x 4.3" W x 4.3" D
Watts:	7W
Lumens:	260lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Dark Gray
Materials:	Aluminum, PC
Lifespan:	30,000 hours

#11160 CCT

Optional: Finish Color











Up Down Wall Sconce - 50W

Size:	4" L x 12" H x 7" D
Watts:	50W
Lumens:	N/A
CCT:	Blue
Voltage:	AC100-240V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	35,000 hours
#11164 50W	

SES-UDW3-2_E26-S





Up Down	Wall Sconce	- 30W
---------	-------------	-------

-	Size:	5" L x 12" H x 8" D
	Watts:	30W
	Lumens:	N/A
	CCT:	Blue
	Voltage:	AC100-240V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Bronze
	Materials:	Aluminum, PC
	Lifespan:	30,000 hours
	#11165 30W	









68

EXTERIOR LED

WALL LAMPS







Wall Sconce, UDW3 - E26

#10573 Silver

Optional: Finish Color, Photocell

Wall Sconce, WL1944 - 13W











Wall Sconce, WL1661S - 12W

Size:	10.2" L x 2.8" W x 4.3" D
Watts:	12W
Lumens:	860lm
CCT Tunable:	3000K, 5000K
Voltage:	AC110 - 120V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Dark, Gray, Frosted
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#10789 #107	90

#10790 5000K



3000K





Wall Sconce, WL2401 - E26

Size:	4.7" W x 13.8" H x 3.3" D	
Watts:	Bulb Dependent	
Bulb:	A19	
Base:	E26	
Voltage:	AC110 - 120V	
Dimmable:	Bulb Dependent	
IP Rating:	IP54	
Finish:	Bronze, Frosted	
Materials:	Aluminum, PC	
Lifespan:	25,000 hours	
#10793 E26 Base Optional: F	inish Color	







	Wall Sconce, WL2342 - E26		
	Size:		8" W x 11.4" H x 3.7" D
B	Watts:		Bulb Dependent
	Bulb:		A19
	Base:		E26 x 2
	Voltage:		AC110 - 120V
	Dimmab	le:	Bulb Dependent
	IP Rating	3:	IP54
	Finish:		Bronze, Frosted
	Materia	s:	Aluminum, PC
	Lifespan	:	25,000 hours
	#10795 E26 x 2	Optional: Fi	nish Color



	Wall Sconce, WL2204 - 6.5W			
	Size:		6.7" L x 3.2" W x 1.6" D	
	Watts:		6.5W	
	Lumens:		500lm	
	CCT:		3000K	
	Voltage:		AC110 - 240V	
	Dimmable:		Non-Dimming	
	IP Rating	g:	IP54	
S	Finish:		Bronze	
	Materia	ls:	Aluminum, PC	
	Lifespar):	30,000 hours	
	#10831 3000K	Optional: Fir	nish Color	

SES-WL2034SN-CCT-4 ССТ CE





EXTERIOR LED

WALL LAMPS













Wall Sconce, WL2202 - 5W

Size:	4.3" L x 4.3" W x 3.5" D
Watts:	5W
Lumens:	450lm
CCT:	3000K
Voltage:	AC100 - 240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#10026	

#10836 3000K

Optional: Finish Color

CCT Wall Sconce, WL2034SN - 4W

Size:	4.5" W x 3.4" H x 2" D
Watts:	4W
Lumens:	180lm
CCT Tunable:	3000K-4000K-5500K
Voltage:	AC100 - 240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	30,000 hours

#10844 CCT

Optional: Finish Color

CCT Wall Sconce, WL2034S - 6.5W

Size:	4.5" W x 4.1" H x 2" D
Watts:	6.5W
Lumens:	380lm
CCT Tunable :	3000K-4000K-5500K
Voltage:	AC100 - 240V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	White
Materials:	Aluminum, PC
Lifespan:	30,000 hours

#10845 CCT

Optional: Finish Color











Wall Sconce, WL2401 - E26

	Size:	7.2" W x 5.2" H x 5.9" D
	Watts:	10W
	Lumens:	680lm
	CCT:	3000K, 5000K
	Voltage:	AC100 - 240V
2020	Dimmable:	Non-Dimming
	IP Rating:	IP54
	Finish:	Dark Gray
	Materials:	Aluminum, PC
	Lifespan:	30,000 hours
	#10552 #105 5000K 3000	Optional: Finish Color Photocell





1	Wall Sconce, WL15003 - 10W		
	Size:	5	.9″ W x 7.2″ H x 5.2″ D
	Watts:	10	WC
	Lumens:	6	60lm
S	CCT:	3	000K, 5000K
-	Voltage:	Д	C100 - 240V
	Dimmable:	Ν	lon-Dimming
	IP Rating:	IF	P65
	Finish:	D	ark Gray
	Materials:	Д	luminum, PC
	Lifespan:	3	0,000 hours
	#10554 3000K	#10555 5000K	Optional: Finish Color





Size:	6.7" W x 14.8" H x 7.5" D
Watts:	Bulb Dependent

Wall Sconce, WL3511 - E26

	walls.	Dub Dependent	
	Bulb:	G50	
	Base:	E26	
	Voltage:	AC110 - 120V	
	Dimmable:	Bulb Dependent	
	IP Rating:	IP44	
	Finish:	Bronze	
	Materials:	Iron, Glass	
	Lifespan:	25,000 hours	
	#10788 E26 Base Optiona	I: Finish Color	







EXTERIOR LED

WALL LAMPS













Wall Sconce, WL1372 - 7.5W

Size:	10.6" W x 3.2" H x 4.4" D
Watts:	7.5W
Lumens:	330lm
CCT:	3000K, 5000K
Voltage:	AC110 - 120V
Dimmable:	Non-Dimming
IP Rating:	IP54
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	30,000 hours
#10791 3000K	#10792 5000K Optional: Finish Color

Up Down RGB Wall Sconce, UPD - 24W

Size:	4" W x 12" H x 7" D
Watts:	24W
CCT:	RGB
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum, Glass
Lifespan:	50,000 hours



Optional: Finish Color

Up Down RGB Wall Sconce, UPD - 72W

Size:	5" W x 12" H x 8" D
Watts:	72W
CCT:	RGB
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze, White
Materials:	Aluminum, Glass
Lifespan:	50,000 hours

#10851 Bronze












	Up Down RGB W
-	Size:
	Watts:
1	CCT:
	Voltage:
	Dimmable:
	IP Rating:
	Finish:
	Materials:
	Lifespan:
	#10852

Vall Sconce, UPD - 36W

Size:	5" W x 8" H x 8	8.5″ D
Watts:	36W	
CCT:	RGB	
Voltage:	AC100-277V	,
Dimmabl	e: Non-Dimmin	g
IP Rating	: IP65	
Finish:	Bronze, Whit	е
Material	Aluminum, G	lass
Lifespan	50,000 hour	S
#10852 RGB	Optional: Finish Color	





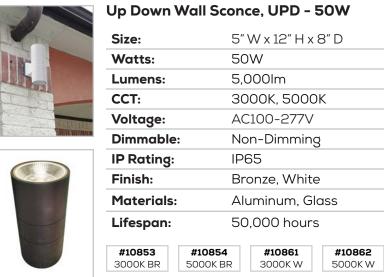

Up Down \	Nall Scon	conce, UPD - 50W	
Size:	5″	W x 12" H x 3	8" D
Watts:	50	W	
Lumens:	5,0	000lm	
CCT:	30	000K, 5000	K
Voltage:	AC	C100-277V	
Dimmable	n No	on-Dimming	ł
IP Rating:		65	
Finish:	Br	onze, White	<u>)</u>
Materials:	Al	uminum, Glo	ass
Lifespan:),000 hours	
#10853 3000K BR	#10854	#10861 3000K W	#10862

.....





	Up Down Wall	Sconce, UPD - 25W
	Size:	5" W x 12" H x 8" D
	Watts:	25W
12 1973	Lumens:	2,500lm
	CCT:	3000K, 5000K
	Voltage:	AC100-277V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Bronze, White
	Materials:	Aluminum, Glass
	Lifespan:	50,000 hours
	#10855 #10 3000K 500	Optional: Finish Color



EXTERIOR LED

WALL LAMPS













Up Down Wall Sconce, UPD - 10W

Size:		6″ W x 9.1″ H x 3.9″ D	
Watts:		W	
Lumens:	5,	000lm	
CCT:		3000K, 5000K, RGB	
Voltage:		AC100-277V	
Dimmable:		Non-Dimming	
IP Rating:		IP65	
Finish:	B	ronze	
Materials:		uminum, Glass	
Lifespan:		0,000 hours	
#10856 3000K	#10857 5000K	#10864 RGB	

Optional: Finish Color

Up Down Wall Sconce, UPD - 12W

Size:	2.6" W x 9.1" H x 3.9" D			
Watts:	12	12W		
Lumens:	1,2	200lm, 1,300lm		
CCT:	3000K, 5000K, RGB			
Voltage:	AC100-277V			
Dimmable:	Non-Dimming			
IP Rating:	IP65			
Finish:	Bronze			
Materials:	Aluminum, Glass			
Lifespan:	50,000 hours			
#10858 3000K	#10859 5000K	#10865 RGB		

Optional: Finish Color

RGB Up Down Wall Sconce, UPD - 12W

Size:	3.5" W x 10.2" H x 6.5" D	
Watts:	12W	
CCT:	RGB	
Voltage:	AC100-277V	
Dimmable:	Non-Dimming	
IP Rating:	IP65	
Finish:	Bronze	
Materials:	Aluminum, Glass	
Lifespan:	50,000 hours	

#10863 RGB


Optional: Finish Color





75





	RGB Square	Up Down Wall Sconce - 36W
	Size:	4.7" W x 7.9" H x 4.7" D
	Watts:	36W
	CCT:	RGB
	Voltage:	AC100-277V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Bronze
	Materials:	Aluminum, Glass
	Lifespan:	50,000 hours
	#10876 RGB Optic	onal: Finish Color



-	RGB Square Up I	Down Wall Sconce - 72W
	Size:	4.7" W x 11.8" H x 4.7" D
	Watts:	72W
	CCT:	RGB
	Voltage:	AC100-277V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Bronze
	Materials:	Aluminum, Glass
	Lifespan:	50,000 hours
	#10877 RGB Optional: Fi	nish Color



6 0	W Max	
Si	ze:	4.7" W x 14.5" H x 8.1" D
W	atts:	2x60W Max
Lu	imens:	Bulb Dependent
Bu	ulb Type:	E26
📕 Vo	oltage:	120V
Di	mmable:	Bulb Dependent
IP	Rating:	IP54
Fi	nish:	Bronze
M	aterials:	Aluminum, Glass
Li	fespan:	30,000 hours
	¢11227 26 Base Optional: Fi	nish Color

Up Down Wall Sconce, WL6101-2 -

..8" H x 4.7" D 77V







76

EXTERIOR LED

WALL LAMPS













Wall Sconce, WL2012A - GU10

Size:	2.4" W x 4" H x 4.1" D	
Watts:	35W Max	
Bulb:	MR16	
Base:	GU10	
Voltage:	AC100 - 240V	
Dimmable:	Bulb Dependent	
IP Rating: IP44		
Finish:	Stainless Steel, Clear	
Materials: Aluminum, Glass		
Bulb Lifespan:	Bulb Dependent	

#10846 GU10 Base

Up Down Wall Sconce, WL2012B - GU10

Size:	2.4" W x 6.7" H x 4" D
Watts:	35W x 2 Max
Bulb:	MR16
Base:	GU10
Voltage:	AC100 - 240V
Dimmable:	Bulb Dependent
IP Rating: IP44	
Finish:	Stainless Steel, Clear
Materials: Aluminum, Glass	
Bulb Lifespan:	Bulb Dependent

#10847 GU10 Base

Wall Sconce, WL2012C - GU10

Size:	V	
Watts:	35W Max	
Bulb:	MR16	
Base:	GU10	
Voltage:	AC100 - 240V	
Dimmable:	Bulb Dependent	
IP Rating:	IP44	
Finish:	Stainless Steel, Clear	
Materials:	Aluminum, Glass	
Bulb Lifespan:	Bulb Dependent	





SARIN


LED WALL PACKS

SARIN's LED Wall Packs are specially designed to be mounted on exterior walls and illuminate pathways below. They are protected from all weather conditions, including rain and snow, and will provide efficient lighting for a long time.

「日」は「中国の

Applications:

- Offices
- Hotels
- Restaurants
- Stores











EXTERIOR LED

WALL PACKS













Wall Pack, SWP07 - 80W, 120W

Size:		14.4" W x 7.4" H x 9.3" D	
Watts:		80W, 120W	
Lumens:		80W: 12,000-12,300lm 120W: 16,500-16,700lm	
CCT:		5700K	
Voltage:		AC120-277V	
Dimmable:		0-10V	
IP Rating:		IP65	
Finish:		Bronze	
Materials:		Aluminum	
Lifespan:		50,000 hours	
#11109 80W	#11113 120W		

Emergency Back Up Wall Pack, SWP07 - 60W, 80W, 120W

Size:	1-	14.4" W x 7.4" H x 9.3" D			
Watts:	E	60W, 80W, 120W			
Lumens:	E	8,800-16,700lm			
CCT:	5	5700K			
Voltage:	A	AC120-277V			
Dimmable:	0-10V				
IP Rating:	IP65				
Finish:	E	Bronze			
Materials:	A	Aluminum			
Lifespan:	In: 50,000 hours				
#11110 80W	#11112 60W	#11114 120W			

CCT Wall Pack, SWP07 - 60W

Size:	14.4" W x 7.4" H x 9.3" D
Watts:	60W
Lumens:	7,800-8,700lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum
Lifespan:	50,000 hours













	Slim Wall Pack, SWP09 - 60W, 120W			
			13.8″ W x 8.8″ H x 4.6″ D 17.8″ W x 12.7″ H x 4.6″D	
	Watts:		60W, 120W 60W: 7,800-8,400 120W: 15,600-16,800lm 3000K-4000K-5000K	
	Lumens:			
	CCT Tunak	ole:		
	Voltage: Dimmable:		AC120-277V 0-10V	
	IP Rating:		IP65 Bronze	
	Finish:			
	Materials: Lifespan:		Aluminum, Glass	
			5	0,000 hours
	#11338 60W	#11339 120W		Optional: 80W





Mini Wall Pack, Photocell - 20W, 30V				
Size:	5	5.8″ W x 8.6″ H x 3.1″ D		
Watts:		20W, 30W		
Lumens:	2	2,700lm - 3,700lm		
CCT:		5700K		
Voltage:	A	AC100-277V		
Dimmable:	N	Ion-Dimming		
IP Rating:	ll	IP65		
Finish:		Bronze, Frosted		
Materials:		Aluminum, PC		
Lifespan:		50,000 hours		
#10508 20W	#10511 30W	Optional: Finish Color, Clear Lens, 15W		





SES-WPN-5700-80 SES-WPN-5700-120





EXTERIOR LED

WALL PACKS













Wall Pack, WPN - 80W, 120W

Size:	12.6" W x 13.4" H 5.3" D
Watts:	80W, 120W
Lumens:	10,520lm, 14,470lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
	D506 OW

Rotatable Wall Pack - 25W, 40W

Size:		9.4" W x 6.5" H x 5.9" D		
Watts:		25W, 40W		
Lumens:		3.250-5,600lm		
CCT:		5700K		
Voltage:		AC100 - 240V		
Dimmable:		0 - 10V		
IP Rating:		IP65		
Finish:		Black, Clear		
Materials:		Aluminum, PC		
Lifespan:		50,000 hours		
#11174 40W	#11176 25W			

Rotatable Wall Pack - 80W

Size:	9.4" W x 10" H x 5.9" D
Watts:	80W
Lumens:	10,400-11,200lm
CCT:	5700K
Voltage:	AC100 - 240V
Dimmable:	0 - 10V
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours







LED FLOOD & POLE LIGHTS

SARIN's LED Flood and Pole Lights are used to replace high pressure sodium flood lights and metal halides and can provide an energy savings of up to 70%. These flood lights will shine in the toughest weather conditions with an impenetrable housing and powder-coated finish. Say goodbye to the hassle of frequently using maintenance lift trucks.

Applications:

- Parking Lots
- Stadiums
- Billboards

Playgrounds



















FLOOD & POLE LIGHTS RGBW Wall Washer, 3.3 ft - 36W, 72W

EXTERIOR LED

Size:	39.4" L x 1.9" W x 4" H		
Watts:	36W, 72W		
Lumens:	2,880lm, 5.040lm		
CCT:	RGBW		
Voltage:	Voltage: AC100-277V		
Dimmable:	P2 or Remote Control		
IP Rating:	IP67		
Finish:	Black		
Materials:	Aluminum		
Lifespan:	>30,000 hours		
#10485	#10486 #10487 #10488		

#10485 36W, P2 **#10486** 72W, P2

#10487 36W, Remote **#10488** 72W, Remote

Optional: Remote Control or P2 System

Chain Light - 3W

Size:		1.8" L x 1.8" W x 1.8" H		
Watts:	Э	3W		
Lumens:	1	00lm		
CCT:	Э	3000K, 5000K, RGBW		
Voltage:	Γ	DC24V		
Dimmable:	١	Non-Dimming		
IP Rating:		IP67		
Finish:	E	Black, Silver		
Materials:		Aluminum		
Lifespan:		50,000 hours		
#10927 #10928 3000K 5000K		#10929 RGBW		

RGB Flood Light, FL01 - 36W

Size:	8.3" W x 10" H x 4" D
0.201	
Watts:	36W
Lumens:	1,260lm, 2,880lm
CCT:	RGB, RGBW
Voltage:	AC100-277V
Dimmable:	PWM
IP Rating:	IP65
Finish:	Gray, Clear
Materials:	Aluminum, Glass
Lifespan:	30,000 hours
#10397	#11128 #11129

Optional: Finish, Beam Angle, 2700-6500K, DMX

90° RGBW

90° RGB



12° RGBW









	Size:		12	2″ W x 9.3″ H x 5.1″ D	
	Watts:		60	WC	
	Lumens:		4,	800lm	
	CCT:		R	GB	
	Voltage:		A	C100-277V	
	Dimmable	:	P١	WM	
	IP Rating:		IP	65	
HILFALLY .	Finish:		Gı	ray, Clear	
- 1	Materials:		Al	uminum, Glass	
	Lifespan:		30	0,000 hours	
			_		
	#10395 30° RGB	#10398 90° RGB			

RGB Flood Light, FL05 - 60W

Optional: Finish, Beam Angle, 2700-6500K, DMX

SES-FL07-RGB-100-30D SES-FL07-RGB-100-90D SES-FL07-RGBW-100-90)-REMOTE 🤍	Siz
Tacaraa	0001	Lu
6000000	õõ-õ 🗄	CC
		Vol
00000000		Din
00000000		IPI
	1745	Fin
	3	Ma
LED Controller		Life
C E	Piccadilly	#1
	Series	30

CCT

 RGB Flood	Light, F	L07 - 100W	
Size:	15	5″ W x 9.2″ H x 4.8″ D	
Watts:	10	00W	
Lumens:	8	3,000lm	
CCT:	R	RGB, RGBW	
Voltage:	Д	AC100-277V	
Dimmable:	P	PWM	
IP Rating:	IF	P65	
Finish:	G	Gray, Clear	
Materials:	Д	Aluminum, Glass	
Lifespan:	3	30,000 hours	
#10396 30° RGB	#10399 90° RGB	#10875 90° RGBW	

Optional: Finish, Beam Angle, 2700-6500K, DMX

	CCT Flood Li	ght, FL06E - 30W, 50W
	Size:	30W:8″Wx7.2″Hx1.8″D 50W:8.6″Wx9.6Hx2″D
	Watts:	30W, 50W
1	Lumens:	3,900lm, 6,500lm
UNITA L	CCT Tunable :	3000K-4000K-5000K
	Voltage:	AC120-277V
	Dimmable:	0-10V
Participant -	IP Rating:	IP65
	Finish:	Bronze
0.	Materials:	Aluminum, PC
15	Lifespan:	50,000 hours
	#11340 #	†11341 50W







Optional: 80W

84

SES-FL06E-CCT-30W

SES-FL06E-CCT-50W

EXTERIOR LED FLOOD & POLE LIGHTS













Slim Shoebox Light, PL - 150W

Size:	16.9" L x 12" W x 3.5" H		
Watts:	150W		
Lumens:	21,000lm		
CCT:	5000K		
Voltage:	AC100-277V		
Dimmable:	1-10V		
IP Rating:	IP66		
Finish:	Light Brown, Clear		
Materials:	Ils: Aluminum, PC		
Lifespan:	50,000 hours		
#11300	#40456-A #40456-D		

150W

Extruded Arm

#40456-D Slip Fitter

Optional: Finish Color, Photocell, Surge Protector,

80W, 100W, 185W, 240W

Slim Shoebox Light, PL - 300W

Size:	23.4" L x 12" W x 3.6" H		
Watts:	300W	/	
Lumens:	41,400	Dlm	
CCT:	5000	K	
Voltage:	AC100)-277V	
Dimmable:	1-10V		
IP Rating:	IP66		
Finish:	Light Brown, Clear		
Materials:	Aluminum, PC		
Lifespan:	50,000 hours		
#11301 300W	#40456-A Extruded Arm	#40456-D Slip Fitter	

Optional: Finish Color, Photocell, Surge Protector, 80W, 100W, 185W, 240W

Slim Shoebox Light, PL - 500W

Size:	30.2" L x 13.4" W x 4.1" H
Watts:	500W
Lumens:	68,000lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	1-10V
IP Rating:	IP66
Finish:	Light Brown, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#11202*	#40456 A #40456 D

#11302* 500W

#40456-A Extruded Arm #40456-B Large Yoke

Optional: Finish Color, Photocell, Surge Protector, 80W, 100W, 185W, 240W

*With Slip Fitter Mount









P

.....

1227

Weller -	Slim Shoebox	Light, PL2 - 300W
	Size:	23.4" L x 12" W x 3.6" H
	Watts:	300W
	Lumens:	45,000lm
	CCT:	5700K
ALL ALL	Voltage:	120V
and the second	Dimmable:	0-10V
	IP Rating:	IP65
	Finish:	Bronze
11-1	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
	#11303 300W	





	Slim Shoebox	Light, PL2 - 500W
	Size:	30.1" L x 12" W x 4.1" H
	Watts:	500W
ATE 194	Lumens:	75,000lm
	CCT:	5700K
	Voltage:	120V
-1	Dimmable:	0-10V
7	IP Rating:	IP65
-	Finish:	Light Brown, Clear
	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
<u></u>	#11304 500W	





**	Hight Voltage S PL - 500W	ilim Shoebox Light,
	Size:	30.1" L x 12" W x 4.1" H
-	Watts:	500W
	Lumens:	85,000lm
	CCT:	5700K
1	Voltage:	200-480V
	Dimmable:	0-10V
	IP Rating:	IP65
	Finish:	Light Brown, Clear
	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
	#11305 Hight Volt	





EXTERIOR LED FLOOD & POLE LIGHTS













Optional: 220-480V

Shoebox Light, SB14 - 150W, 300W

Size:	20.9" L x 13.1" W x 3.3" H		
Watts:	300W		
Lumens:	39,80)8-43,500lm	
CCT:	5700	К	
Voltage:	AC12	0-277V	
Dimmable:	0-10V		
IP Rating:	IP65		
Finish:	Bronze		
Materials:	Aluminum, PC		
Lifespan:	50,000 hours		
#11117 300W	#30470 150W	#10898 External Photocell	

Optional: 450W, High Voltage

Shoebox Light, SB16 - 150W, 300W


Size:	22.7/26.6" L x 11.8" W x 2.8" H	
Watts:	150W, 300W	
Lumens:	20,250lm - 45,000lm	
CCT Tunable :	3000K-4000K-5000K, 5700K	
Voltage:	120-277V & 277-480V	
Dimmable:	0-10V	
IP Rating:	IP65	
Finish:	Bronze	
Materials:	Aluminum, PC	
Lifespan:	50,000 hours	
#11324 CCT 150W	#11326 5700K, 120-277V	
#11325 CCT 300W	#11327 5700K, 277-480V	

RGBW Stadium Light Light, SP06 -400W - 1,200W

400/500w	600/75	50w	100	0/1200w
14.8" W x 17.2" H	21.6" W x 2	20.5" H	23" V	V x 21.3" H
Lumens:	52,000	0lm - 1	180,0	000lm
CCT Tunable	ble: 3000K-4000K-5700K-RGBW			
Voltage:	AC120	-277\	/	
Dimmable:	0-10V			
IP Rating:	ing: IP65			
Finish:	Gray, Clear			
Materials:	: Aluminum, Glass			
Lifespan:	espan: 30,000 hours			
#11328 400W	#11329 500W	#113		
	#11332 1000W	#113 : 1200		
	• • •			






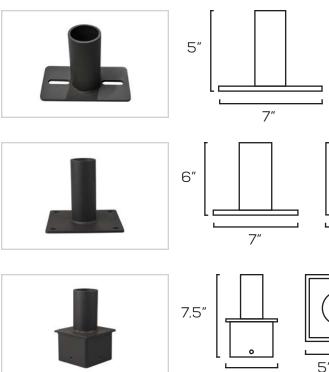




















U











Δ″

4" / 7"

Flat Tenon, Rectangle

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8″ Minimum
Materials:	Bronzed Steel
#10745	
Rectangle	

Flat Tenon, Square

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel



External Tenon, Square

Compatibility:	4" / 5" Square Pole
Slip Fitter Size:	2 3/8″ Minimum
Materials:	Bronzed Steel



Internal Tenon, Square

Compatibility:	4" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel
#10756 4"	

External Tenon, Round

Compatibility:	4" Round Pole
Slip Fitter Size:	2 3/8″ Minimum
Materials:	Bronzed Steel
#10750 4"	

90° Bracket, Short

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8″ Minimum
Materials:	Bronzed Steel
#10751	

#10751 90°

90° Bracket, Long

Compatibility:	Square Pole, Wall
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel


#10961 #10752 4″ 7″











.












25″

•



EXTERIOR LED FLOOD & POLE LIGHTS



4″

90° Two Head Bracket, Square

Compatibility:	4" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10749 4″


Two Head Bullhorn, Round


Compatibility:	4" Round Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel






65.5″









4" Square Pole Compatibility: Slip Fitter Size: 2 3/8" Minimum

Bronzed Steel



Materials:

Three Head Bullhorn, Round

Compatibility:	4" Round Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel



Three Head Bullhorn, Square

Compatibility:	4" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10959 4″

120° Three Head Bullhorn, Round

Compatibility:	4" Round Pole
Slip Fitter Size:	2 3/8″ Minimum
Materials:	Bronzed Steel

#10965 4″

90° Four Head Bullhorn, Square

Compatibility:	4" Square Pole
Slip Fitter Size:	2 3/8" Minimum
Materials:	Bronzed Steel

#10960 4″





SARIN

LED SOLAR LIGHTS

SARIN's LED Solar Lights are perfect for remote locations that do not have a power source or to reduce energy costs. These lights can run for days on one charge as long as they get access to direct sunlight. Extra care has been taken to ensure the highest degree of reliability for solar LED lights. All of these fixtures have replaceable batteries.

Applications:

- Area Lighting
 Street Lighting
 Isolated Locations
 Parking Lots
- Sidewalks



SES-SWL2-15-6





EXTERIOR LED

SOLAR LIGHTS





3

3









Solar Wall Light, SWL2 - 15W

Size:	12" W x 10.2" H x 5" D
Watts:	15W
Lumens:	1,600lm
CCT:	6000K
Voltage:	5.4V
Battery:	10,800mAh Li-ion
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, ABS, PC
Lifespan:	35,000 hours
#10270	

#10370 6000K PIR

Solar Area Light, SSLPR - 40W

Size:	27.8" L x 11.4" W x 2.9" D
Watts:	40W
Lumens:	4,800lm
CCT:	6000K
Voltage:	9.6V
Battery:	12,000mAh LiFeP04
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, ABS, PC
Lifespan:	35,000 hours
#10367 IP Camera PIR	#10368 6000K PIR Optional: Wi-Fi IP Camera

Adjustable Solar Light, SSLSK - 80W

Size:	46.4" L x 15.2" W x 9.6" D
Watts:	80W
Lumens:	12,000lm
CCT:	6000K
Voltage:	14.8V
Battery:	32,000mAh Li-ion
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, ABS, PC
Lifespan:	35,000 hours

#10369 6000K PIR

Optional: Double Head, 40W, 120W











	C III	
di la	a set	
		and the
	0	
		4-
		2./

RGBWW Solar Bollard, SBL - 6.8W

100		
-	Size:	10.2" L x 10.2" W x 15" H
	Watts:	6.8W
2	Lumens:	360lm
	CCT:	RGB, 3000K, 6500K
z	Battery:	12,000mAh LiFeP04
	Dimmable:	PWM
	IP Rating:	IP65
	Finish:	White, Clear
	Materials:	Aluminum, ABS, PC
	Lifespan:	35,000 hours
	#10364 15 in Optional: Fi	nish Color

SES-SBL2-RGBW-1.5-24





	Adjustable Sol	ar Light, SBL2 - 1.5W
-	Size:	10.2" L x 10.2" W x 35" H
	Watts:	1.5W
	Lumens:	170lm
	CCT:	RGB, 3000K, 6500K
	Battery:	12,000mAh LiFeP04
	Dimmable:	PWM
	IP Rating:	IP65
	Finish:	Black, Clear
	Materials:	Aluminum, ABS, PC
2	Lifespan:	35,000 hours
	#10629 35 in Optiona	: Finish Color

SES-SWL-3000+6000-1.5







EXTERIOR LED

SOLAR LIGHTS













Mini Solar Flood Light, SWL - 1.5W

Size:	6" L x 3.8" W x 3.3" D		
Watts:	1.5W		
Lumens:	200lm		
CCT:	6000K (3000K Back)		
Battery:	1,200mAh Li-ion		
Dimmable:	Motion Sensor, Photocell		
IP Rating:	IP65		
Finish:	White / Black / Silver		
Materials:	Aluminum, ABS, PC		
Lifespan:	35,000 hours		
#10705	#10706 #10707		

Silver PIR

#10705 White PIR #10706 Black PIR

Optional: Finish Color, 2W, 3.2W

Solar Flood Light, SWL - 7W

Size:	10.6" L x 8.7" W x 4.3" D	
Watts:	7W	
Lumens:	800lm	
CCT:	6000K (3000K Back)	
Battery:	2x2,000mAh Li-ion	
Dimmable:	Non-Dimming	
IP Rating:	IP65	
Finish:	White, Clear	
Materials:	Aluminum, ABS, PC	
Lifespan:	35,000 hours	

#10704 White PIR

Optional: Finish Color

Solar Accent Light, SWL2WC - 2W

Size:	6.2" L x 4.9" W x 6" D	
Watts:	2W	
Lumens:	200lm	
CCT:	3000K	
Battery:	1,200mAh Li-ion	
Dimmable:	PWM	
IP Rating:	IP65	
Finish:	Silver, Frosted	
Materials:	Aluminum, ABS, PC	
Lifespan:	35,000 hours	

#10708 3000K PIR





LED CANOPY & GAS SIGNS

SARIN's LED Canopy Lights are specifically designed to illuminate from even the tallest canopy. They are crafted from durable materials that can withstand extreme outdoor environments. Gas Price Signs can easily be programmed and are excellent at drawing attention.

Applications:

• Hotels • Restaurants

Gas Stations

Parking Garages

189





SES-CP5-5700-95









EXTERIOR LED CANOPY AND GAS SIGNS













Canopy Light, CP5 - 95W

Size:	15" L x 15" W x 3.4" D
Watts:	95W
Lumens:	12,160-13,110lm
CCT:	5700K
Voltage:	AC100-277V
Dimmable:	1 - 10V
IP Rating:	IP65
Finish:	White, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10353	

#10353 95W

Canopy Light, CP4 - 130W

Size:	15" L x 15" W x 2.5" D	
Size:	15 L X 15 W X 2.5 D	
Watts:	130W	
Lumens:	15,500lm	
CCT:	5700K	
Voltage:	AC100 - 240V	
Dimmable:	Non-Dimming	
IP Rating:	IP65	
Finish:	White, Clear	
Materials:	Aluminum, PC	
Lifespan:	50,000 hours	
#10341		

130W

Canopy Light, CP5 - 150W

Size:	15" L x 15" W x 3.4" D
Watts:	150W
Lumens:	18,750-19,050lm
CCT:	5700K
Voltage:	AC100-277V
Dimmable:	0 - 10V
IP Rating:	IP65
Finish:	Black, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours











CCT Canopy Light, PG07 - 75W

-		
-	Size:	9.6" L x 9.6" W x 3.6" D
	Watts:	75W
-	Lumens:	9,400 - 10,300lm
Ŧ	CCT:	3000K-4000K-5000K
1 -	Voltage:	AC120-277
	Dimmable:	0 - 10V
	IP Rating:	IP65
	Finish:	White, Clear
100	Materials:	Aluminum, PC
7	Lifespan:	50,000 hours
	#11334 75W	

SES-CPH-5700-180





	CCT Canopy Light, PG - 55W		
and the second second	Size:	10" L x 10" W x 3.1" D	
	Watts:	55W	
-	Lumens:	7,700lm	
	CCT:	3000K-4000K-5000K	
	Voltage:	AC100-277	
	Dimmable:	1 - 10V	
	IP Rating:	IP65	
Strange .	Finish:	White, Bronze	
	Materials:	Aluminum, PC	
	Lifespan:	50,000 hours	
Jan 1.4	#10346 #103 White Bror		



	CCT Canopy Light, PG - 75W	
A PARTY	Size:	11" L x 11" W x 3.1" D
	Watts:	75W
	Lumens:	10,875lm
	CCT:	3000K-4000K-5000K
	Voltage:	AC100-277
	Dimmable:	1 - 10V
	IP Rating:	IP65
	Finish:	White
	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
· LE	#10348 Option	al: Finish Color

White

CCT Canopy Light, PG - 75W





EXTERIOR LED CANOPY AND GAS SIGNS













Canopy Light, CPH - 180W

Size:	20.5" L x 20.5" W x 9.5" D
Watts:	180W
Lumens:	24,500lm
CCT:	5700K
Voltage:	AC100-240V
Dimmable:	Non-DImming
IP Rating:	IP65
Finish:	White, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10344	

#10344 180W

Optional: 150W

Canopy Light, CP02B - 240W

Size:	20.5" L x 20.5" W x 9.6" D
Watts:	240W
Lumens:	10,875lm
CCT:	5700K
Voltage:	AC120-277
Dimmable:	1 - 10V
IP Rating:	IP65
Finish:	White
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10946 Optional	: 150W, 180W

240W

Optional: 150W, 180W

Slim Gas Price Sign, 12 & 24 in - 45 & 48W

Size:	3'2" W x 1'4" H x 1" D 6'5" W x 2'3" H x 1" D
Watts:	45W, 48W
CCT:	Red / Green
Voltage:	AC110-240V
Dimmable:	Non-Dimming
IP Rating:	IP67
Finish:	Black
Materials:	Iron
Lifespan:	100,000 hours

#11195 12" Green











	Gas Price Sign, 12 in - 64.4W			
3009	Size:	3.	3′ W x 1.3′ F	Н x З.5″ D
Regular 2001	Watts:	64	1.4W	
	Controller	: Rf	Remote 8	Арр
	CCT:	Re	ed / Green ,	/ White
	Voltage:	A	C110V	
	Dimmable	: Lię	ght Sensor	
	IP Rating:	IP	53	
	Finish:	BI	ack	
	Materials:	Irc	on	
	Lifespan:	10	0,000 hou	rs
	#11200 Red Double	#11201 Green Double	#11202 White Double	

.4W

SES-GAS48-X-D



	Go
	Si
3.09 ⁸	Si W Cd Cd Vd D
لا ل ل.ل	C
1 0	C
l O Power	V
	D
unnu 🗶 💦 👔	IP
	Fi
	Μ
	Li
· M	i Gre

	Gas Price Sign, 24 in - 242W		
	Size:	5.4' W x 2.4' H x 3.5" D	
	Watts:	242W	
U	Controller:	RF Remote & App	
	CCT:	Red / Green / White	
	Voltage:	AC110V	
	Dimmable:	Light Sensor	
	IP Rating:	IP53	
	Finish:	Black	
>	Materials:	Iron	
	Lifespan:	100,000 hours	
7	#11203#112Green DoubleWhite I		



	GDare	
	8925	
	- 8525 = 84HS	100
-	# 8 195	AN
	# 34.35	
102	Ж агазин У	
10	91 FE 000 400	ALC: N
Â		2
		14
	1. 1	
100	N	

This is	Gas Price S	6 Sign, 36 in - 415W
	Cina	

	Size:	7.6' W x 3.6' H x 3.9" D
	Watts:	415W
(Inc.)	Controller:	RF Remote & App
100	CCT:	Red / Green / White
1998	Voltage:	AC110V
ette 11 o da	Dimmable:	Light Sensor
	IP Rating:	IP53
	Finish:	Black
À	Materials:	Iron
	Lifespan:	100,000 hours
	#11206 Red Double	#11207#11208Green DoubleWhite Double

















EXTERIOR LED CANOPY AND GAS SIGNS

Gas Price Sign, 48 in - 557.6W

Size:	10.1' W x 4.3' H x 3.9" D
Watts:	557.6W
Controller:	RF Remote & App
CCT:	Red / Green
Voltage:	AC110V
Dimmable:	Light Sensor
IP Rating:	IP53
Finish:	Black
Materials:	Iron
Lifespan:	100,000 hours
#11209 #11210 Red Double Green Dou	-

Gas Price Sign, 18 in - 90W

Size:	5	5' W x 3.3' H x 3.5" D		
Watts:	9	OW		
Controller	: R	F Remote		
CCT:	R	ed / White		
Voltage:	: AC110V			
Dimmable	able: Light Sensor			
IP Rating:	Rating: IP65			
Finish:	: Black			
Materials:	s: Iron, Acrylic			
Lifespan:	Lifespan: >100,000 hours			
#10630 Red Single	#10631 Red Double	#10632 White Double		

Gas Price Sign, 18 in - 90W

Size:	5.7' W x 4' H x 3.5" D			
Watts:	90	W		
Controller:	RI	⁼ Remote		
CCT:	Re	ed / Green		
Voltage:	A	AC110V		
Dimmable:	Light Sensor			
IP Rating:	IP65			
Finish:	Black			
Materials:	Iron, Acrylic			
Lifespan:	>100,000 hours			
#10633 Red Single	#10634 Red Double	#10635 Green Double		

SARINEnergy.com





SARIN

LED HIGH POWER LAMPS

SARIN's High Power Lamps will brighten up any outdoor area. LED Corn Lamps are most commonly used to replace HID lamps and metal halide bulbs. These lamps are an economical and easy way to replace high wattage lamps without having to change existing fixtures.

Applications:

- Offices
- Shopping Centers
- Hospitals
- Gas Stations



SES-CL1-6500-40-E39









EXTERIOR LED

HIGH POWER LAMPS













Corn Bulb, CL1 - 40W

Size:	3.5" W x 10.6" H
Watts:	40W
Lumens:	4,000lm
CCT:	6500K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP64
Finish:	White, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#10079 E39 Base	

Corn Bulb, CL1 - 100W

Size:	4.1" W x 12.4" H
Watts:	100W
Lumens:	10,000lm
CCT:	5700K, 6500K
Voltage:	AC85 - 300V
Dimmable:	Non-Dimming
IP Rating:	IP64
Finish:	White, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours
	10080 00K E39

Corn Bulb, CL1B1 - 150W

Size:	4.4" W x 14" H
Watts:	150W
Lumens:	17,940lm
CCT:	5700K
Voltage:	AC85 - 300V
Dimmable:	Non-Dimming
IP Rating:	IP64
Finish:	White, Clear
Materials:	Aluminum, PC
Lifespan:	50,000 hours









t	C S

	Corn Bulb, CLW07E - 18W		
	Size:	2.6" W x 5.7" H	
	Watts:	18W	
	Lumens:	2,610lm	
Y	CCT:	3000K, 5700K	
A SUMPLY	Voltage:	AC100-277V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP65	
	Finish:	White, Clear	
	Materials:	Aluminum, PC	
	Lifespan:	50,000 hours	
		#10045 00K E26	








SES-PAR30D-5000-35



	Retrofit Corr	n Bulb, CLH - 75W, 115W
Ť.,	Size:	11.7" L x 5.4" W x 3.4" H
	Watts:	75W, 115W
TTO A	Lumens:	9,750lm, 14,950lm
	CCT:	5700
Ballan	Voltage:	AC100-277V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Black, Clear
	Materials:	Aluminum, PC
	Lifespan:	50,000 hours
	#10083 115W, E39 Base	#10084 75W, E39 Base

Want to find something new? Search our website for any of our products!



EXTERIOR LED

HIGH POWER LAMPS









High-Powered F	AR30 Bull	o - 35W
-----------------------	-----------	---------

Size:	3.7" W x 4.7" H
Watts:	35W
Lumens:	2,300 - 3,200lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	TRIAC
IP Rating:	IP20
Finish:	White, Clear
Materials:	Aluminum, Glass
Lifespan:	50,000 hours
#10064	

#10064 E26 Base

High-Powered PAR38 Bulb - 60W

Size:	4.7" W x 5.3" H
Watts:	60W
Lumens:	4,800 - 5,200lm
CCT:	5000K
Voltage:	AC100-277V
Dimmable:	Non-Dimming
IP Rating:	IP20
Finish:	White, Clear
Materials:	Aluminum, Glass
Lifespan:	50,000 hours

#10065 E26 Base

SARIN

X



SARIN

LED LANDSCAPE LIGHTS

Be the envy of your neighbors with SARIN's Outdoor Landscaping Lights! Light up your walkways or show off your garden at any time of night with this waterproof light series.

Applications:

- Hotels
- Parks
- GardensSidewalks

Bulbs are sold separately f fixtures that require them.











EXTERIOR LED LANDSCAPE LIGHTS







Size:	7.9" L x 7.9" W x 7.9" D	
Watts:	20W	
Lumens:	2,000lm	
CCT Tunable	: 3000K/4000-4500K/6000K	
Voltage:	AC100-277V	
Dimmable:	Non-Dimming	
IP Rating:	IP65	
Finish:	Black	
Materials:	Aluminum, PC	
Lifespan:	30,000 hours	
#10627 20W Opt	Optional: Finish Color	







Size:	11.8" L x 4.7" W x 4.7" D
Watts:	10W
Lumens:	1,000lm
CCT Tunable:	3000K-4500K-6000K
Voltage:	AC90-264V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Black
Materials:	Aluminum, PC
Lifespan:	30,000 hours

#10626 10W

Optional: Finish Color





Post Top Bollard Light, PT01 - E26

Size:	3.5" W x 3.5" L x 4.2" D
Watts:	Bulb Dependent
Bulb Type:	A19, PAR20, BR*
Base:	E26
Voltage:	AC120V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Finish:	Black, Frosted
Materials:	Aluminum, PC
Lifespan:	50,000 hours

#10940 E26


*Fixture only; bulbs sold separately



105







CCT Post Top Bollard Light – 20W

Size:	7″ L x	7" L x 7" W x 36"/42" H	
Watts:	20W		
Lumens:	1,400	lm	
CCT Tunable:	3000	K-4000K-5000K	
Voltage:	AC100	D-277V	
Dimmable:	Non-[Dimming	
IP Rating:	IP65		
Finish:	Bronz	e	
Materials:	Alumi	num, PC	
Lifespan:	50,00)0 hours	
	0289-В 2″ Вазе	#10289-C 36" Base	







	CCT Flat Top Bollard Light - 20W		
• •	Size:	6.3" L x 6.3" W x 38.5" H	
100	Watts:	20W	
-	Lumens:	1,600lm	
F	CCT Tunable	: 3000K-4000K-5000K	
-	Voltage:	AC110V-240V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP65	
	Finish:	Bronze, Frosted	
	Materials:	Aluminum, PC	
	Lifespan:	30,000 hours	
•	#10269 CCT	Optional: Finish Color, Height	







EXTERIOR LED LANDSCAPE LIGHTS







CCT Round Top Bollard Light - 20W

	2011
Lumens:	1,600lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC110V-240V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze, Frosted
Materials:	Aluminum, PC
Lifespan:	30,000 hours

#10291 CCT

Optional: Finish Color, Height

CCT Flat Bollard - Watt Adjustable











CCT Domed Bollard - Watt Adjustable

Size:		6.3" L x 6.3" W x 43.7" H
Watt Adj	ustable:	12W-16W-22W
Lumens:		Standard: 2750lm Louvered: 1450-1540lm
CCT Tunc	able:	3000K-4000K-5000K
Voltage:		AC120-277V
Dimmabl	e:	0-10V
IP Rating	j:	IP65
Finish:		Bronze
Material	5:	Aluminum, PC
Lifespan	:	50,000 hours
#11133 Standard	#11134 Louvered	#11136 #11137 Flat Head Round Head









CCT Square Bollard - Watt Adjustable

Size:	6.3" L x 6.3" W x 42.1" H
Watt Adjustable:	12W-16W-22W
Lumens:	2750lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC120-277V
Dimmable:	0-10V
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum, PC
Lifespan:	50,000 hours
#11135 Square Optional: Finish Color, Height	



SES-GS02B-75WACGA1-abcde





-

RGBW Lawn Lights, 10 Lamps - 30W		
Size:	5.8" W x 4.6" D	
Watts:	3W x10	
Lumens:	600lm / Lamp	
CCT:	RGBW	
Voltage:	AC110V	
Dimmable:	Non-Dimming	
IP Rating:	IP65	
Finish:	Black, Frosted	
Materials:	Aluminum, PC	
Lifespan:	30,000 hours	
#10548 RGBW Option	nal: Remote	





1-11	Standing Lawn Light - 8W		
一样	Size:	5.9″ W x 23.6″/ 39.4″ L x 2.4″ D	
7	Watts:	8W	
ST.	Lumens:	240lm	
	CCT:	5000K	
	Voltage:	AC100-240V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP65	
	Finish:	Dark Gray, Frosted	
	Materials:	Painted Aluminum, PC	
	Lifespan:	30,000 hours	
	#10550 #105 23 in 39		





ⓓ

EXTERIOR LED

LANDSCAPE LIGHTS







ССТ







CCT Garden Light, GS02B - 55W

Size:	15" L x 18" W x 23.3" H
Watts:	55W
Lumens:	7,150lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-277V
Dimmable:	1 - 10V
IP Rating:	IP44
Finish:	Aluminum, Glass
Materials:	Bronze, Clear Lens
Lifespan:	50,000 hours
#10387	

#10387 55W

Optional: Finish Color, Photocell, 35W

CCT Garden Light, GS02B - 75W

Size:	15" L x 18" W x 23.3" H
Watts:	75W
Lumens:	12,000lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	AC100-277V
Dimmable:	1 - 10V
IP Rating:	IP44
Finish:	Aluminum, Glass
Materials:	Bronze, Clear Lens
Lifespan:	50,000 hours

#10388 75W

Optional: Finish Color, Photocell

CCT Garden Light, GS02 - 150W

Size:	17.7" L x 20.9" W x 26.2" H
Watts:	150W
Lumens:	12,000lm
CCT Tunable:	4000K
Voltage:	AC100-277V
Dimmable:	1 - 10V
IP Rating:	IP44
Finish:	Aluminum, Glass
Materials:	Bronze, Clear Lens
Lifespan:	50,000 hours

#10389 150W

Optional: Finish Color, Photocell, 100W










20Mit V	Lawn Spotlight, LSGL - 7W		
100	Size:	4" W x 9.4" H x 2.6" D	
	Watts:	7W	
	Lumens:	560lm	
	CCT:	3000K	
34	Voltage:	DC12V	
	Dimmable:	Non-Dimming	
	IP Rating:	IP65	
	Finish:	Black	
The second second	Materials:	Aluminum, Glass	
	Lifespan:	30,000 hours	
- d	#11190 7W Optional: N	lount	



	Lawn Spotlight, LSGL - 10W	
	Size:	4.3" W x 11.4" H x 3" D
	Watts:	10W
	Lumens:	800lm
	CCT:	3000K
	Voltage:	DC12V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Black
	Materials:	Aluminum, Glass
	Lifespan:	30,000 hours
-	#11191 10W Optional:	Mount

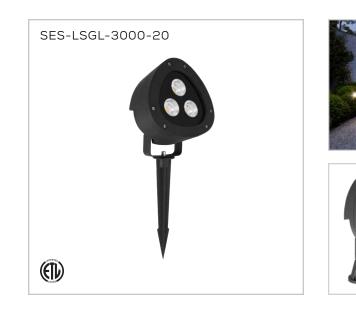

R.	Lawn Spotlight, LSGL - 20W	
1	Size:	4.3" W x 16" H x 5.1" D
	Watts:	20W
-	Lumens:	1,700lm
	CCT:	3000K
	Voltage:	DC12V
	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Black
	Materials:	Aluminum, Glass
	Lifespan:	30,000 hours
	#11192 20W Optiono	il: Mount

SES-LSGL-3000-40





EXTERIOR LED

LANDSCAPE LIGHTS













Lawn Spotlight, LSGL - 40W

Size:	3.6" W x 18.6" H x 7.4" D
Watts:	40W
Lumens:	3,400lm
CCT:	3000K
Voltage:	DC12V
Dimmabl	e: Non-Dimming
IP Rating	: IP65
Finish:	Black
Materials	Aluminum, Glass
Lifespan	30,000 hours
#11193 40W	Optional: Mount

Brass Spotlight, SPB01 - MR16

Size:	2.1" W x 5.3" H
Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU5.3 Bi-Pin
Voltage:	AC12V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Finish:	Brass, Clear
Materials:	Brass, Glass
Lifespan:	30,000 hours

#10280 MR16

Optional: Mount

Brass Spotlight, SPB06 - MR16

Size:	2.5" W x 7.1" H
Watts:	Bulb Dependent
Bulb:	MR16
Base:	GU5.3 Bi-Pin
Voltage:	AC12V
Dimmable:	Bulb Dependent
IP Rating:	IP65
Finish:	Brass, Clear
Materials:	Brass, Glass
Lifespan:	30,000 hours

#10281 MR16

Optional: Mount













Mushroom Lawn Light - 3W


•
7.5" W x 20.9" H
ЗW
150lm
3000K
AC12V
Non-Dimming
IP65
Bronze
Aluminum
50,000 hours
Finish Color, Driver, Quick Connector













ЗW

Torch Lawn Light - 3W

	Size:	3" W x 16.6" H
5	Watts:	ЗW
	Lumens:	150lm
	CCT:	3000K
	Voltage:	AC12V
19	Dimmable:	Non-Dimming
	IP Rating:	IP65
	Finish:	Bronze
	Materials:	Aluminum
B	Lifespan:	50,000 hours
	·	
5	#10284 Optional: F	inish Color. Driver. Quick Connector





ⓓ

Ladbroke Series

EXTERIOR LED

LANDSCAPE LIGHTS









RGB Landscape	Flood Light - 12W
---------------	-------------------

Size:	4″ W x 6.3″H
Watts:	12W
Lumens:	1,625lm
CCT:	RGB
Voltage:	120-277V
Dimmable:	Non-Dimming
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum
Lifespan:	50,000 hours
#11342	

#11342 12W

Optional: Mounting

CCT Landscape Flood Light - 25W

Size:	4" W x 6.3"H
Watts:	25W
Lumens:	3,625lm
CCT Tunable:	3000K-4000K-5000K
Voltage:	120-277V
Dimmable:	0-10V
IP Rating:	IP65
Finish:	Bronze
Materials:	Aluminum
Lifespan:	50,000 hours

#11343 25W

Optional: Mounting

SARINEnergy.com

