



BLD22SS | **LED**
BLDL22SS | **BOLLARD**

Project: _____ Type: _____

Name: _____ Date: _____



← Louvered

OVERVIEW

Tunable: CCT 3000K-4000K-5000K

Applications: Outdoor IP65

Efficacy: 65lm/W

Dimming: 0-10V

LED Type: Lumileds 2835

Lens Type: Clear

Driver: Weledpower

Operating Temp: -40° to 113° F

Operating Humidity: 10-65% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Adjustable CCT, Wattage, and Dimming
- Protected from the elements with an IP65 rating making it suitable for wet conditions
- Powder Coated Bronze finish looks great in any location
- Durable aluminum housing protects from wear and tear

OPTIONAL ACCESSORIES

- Interchangeable & Replacement Bollard Heads
- Light Detecting Photocell Sensor

Size	6.3" x 6.3" x 43.7"
Watts	12W-16W-22W
Voltage	AC120-277V
Dimming	0-10V
Beam Angle	N/A
CRI	>80
PF	≥0.9

Lumens	Standard: 2750lm Louvered: 1450-1540lm
CCT	3000K-4000K-5000K
IP Rating	IP65
Materials	Aluminum, PC
Finish	Bronze
Lens	Clear
Lifespan	50,000 hrs

SARIN LED BOLLARDS are an excellent choice to provide long lasting, energy efficient LED lighting for your outdoor spaces. Featuring a domed head, these lights are perfect for exterior pathways and open spaces, the lights feature a tall, modern profile. The bollard has an aluminum housing, providing corrosion resistance ideal for areas with heavy traffic.

This decorative LED bollard light fixture is ideal for exterior commercial, hospitality and municipal applications.



Replaceable, interchangeable heads are available.







PHOTOMETRICS:

Standard

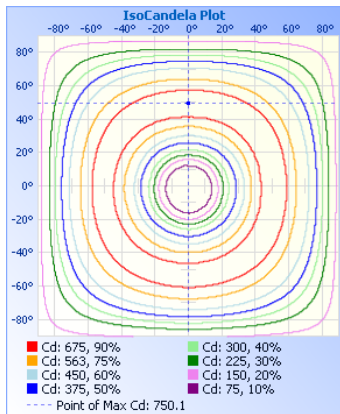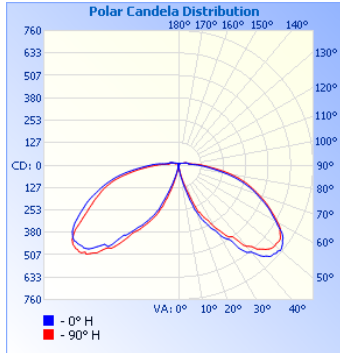


Louvered

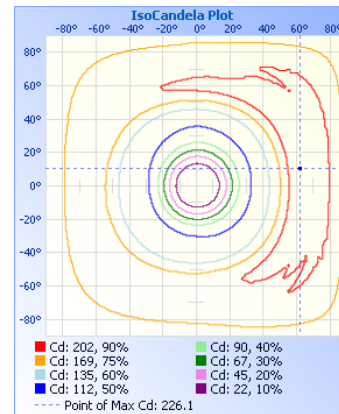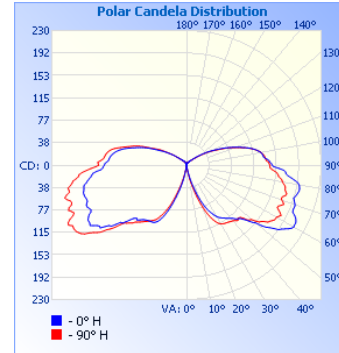

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:

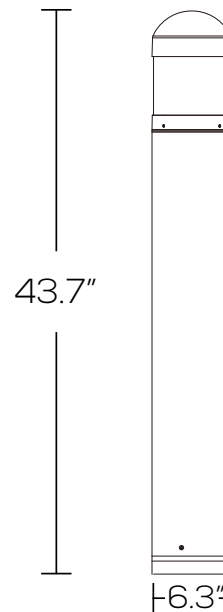



BLD22SS | **LED**
BLDL22SS | **BOLLARD**

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	Head Style	CCT	Watts	Voltage
<input checked="" type="checkbox"/> BLD22SS	<input type="checkbox"/> Standard	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 22W	<input checked="" type="checkbox"/> 120-277V	
<input checked="" type="checkbox"/> BLDL22SS	<input type="checkbox"/> Louvered				

SES-BLD22SS-CCT-22
 Example Model Number

_____ **SES** - **BLD** - _____ - **Tunable** - **22** - **120-277**

Quantity Fixture Head Style CCT Watts Voltage


Common Stock Models:

Optional Accessories:

Item #	Model #
11133	SES-BLD22SS-CCT-22
11134	SES-BLDL22SS-CCT-22


Replacement Heads	
11136	SES-BLRL22SS-HEAD
11137	SES-BLDL22SS-HEAD

11136



Flat Louvered Head

11137



Round Louvered Head