



LNDX

LED ALUMINUM LANDSCAPE LIGHT

Project: _____ Type: _____

Name: _____ Date: _____



OVERVIEW

Tunable: 3000K

Applications: Outdoor IP65

Efficacy: 50-56lm/W

Dimming: Non-Dimming

LED Type: SMD2835

Lens Type: PC & Glass

Voltage: 12V

Lifespan: 50,000 Hours

Warranty: 3 Years

Size	See Dimensions	Lumens	150-280lm
Watts	3W, 5W	CCT	3000K
Voltage	12V	IP Rating	IP65
Dimming	Non-Dimming	Materials	Aluminum, Glass
Beam Angle	60°, 360°	Finish	Bronze
CRI	>80	Lens	Frosted
PF	>0.5	Lifespan	50,000 Hours

FEATURES

- Bright White Light 3000K
- Protected from the elements with an IP65 rating making it suitable for rainy environments
- Durable aluminum housing protects from wear and tear
- Modern design looks good in any location

OPTIONAL ACCESSORIES

- Quick Connectors allow for multiple units to be powered simultaneously

SARIN LED Landscape Lights are an easy way to brighten your landscape. The lights are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers. These lights are perfect along pathways, low level perimeter lighting, garden bed lighting, area lighting, accent lighting and walkway lighting.

With cast-aluminum construction, powder-coated finish and weatherproof electronics, you can count on them to last. These lights are have a lifespan of 50,000 hours.





LNDX


**LED ALUMINUM
LANDSCAPE
LIGHT**

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:


10282

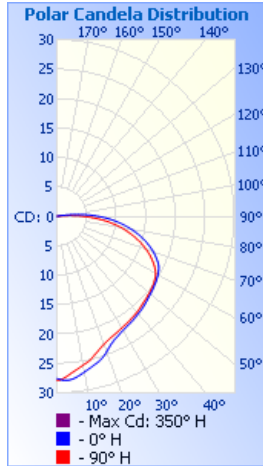

10283

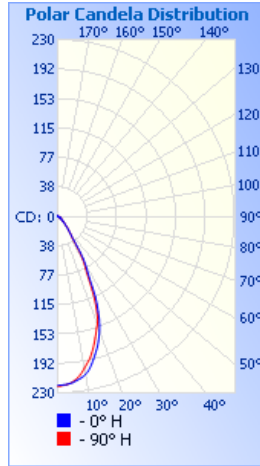

10284

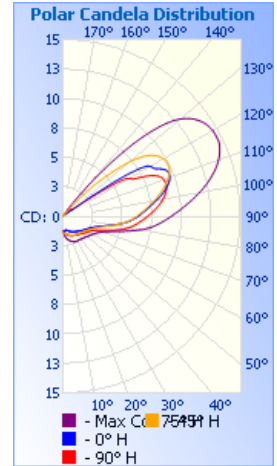

Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	4.38 fc	18.3 ft	18.7 ft
5.0ft	1.10 fc	36.6 ft	37.4 ft
7.5ft	0.49 fc	54.9 ft	56.2 ft
10.0ft	0.27 fc	73.1 ft	74.9 ft
12.5ft	0.18 fc	91.4 ft	93.6 ft
15.0ft	0.12 fc	109.7 ft	112.3 ft

■ Vert. Spread: 149.4°
■ Horiz. Spread: 150.1°

Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	35.1 fc	2.6 ft	2.5 ft
5.0ft	8.77 fc	5.1 ft	5.1 ft
7.5ft	3.90 fc	7.7 ft	7.6 ft
10.0ft	2.19 fc	10.2 ft	10.2 ft
12.5ft	1.40 fc	12.8 ft	12.7 ft
15.0ft	0.97 fc	15.3 ft	15.2 ft

■ Vert. Spread: 54.2°
■ Horiz. Spread: 53.9°


Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	0.21 fc	4.9 ft	2.3 ft
5.0ft	0.05 fc	9.8 ft	4.6 ft
7.5ft	0.02 fc	14.7 ft	6.9 ft
10.0ft	0.01 fc	19.6 ft	9.3 ft
12.5ft	0.01 fc	24.5 ft	11.6 ft
15.0ft	0.01 fc	29.4 ft	13.9 ft


■ Vert. Spread: 88.9°
■ Horiz. Spread: 49.7°

DIMENSIONS:


10282

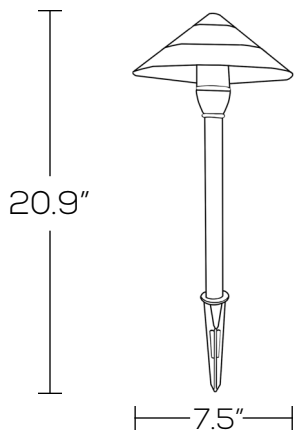

10283

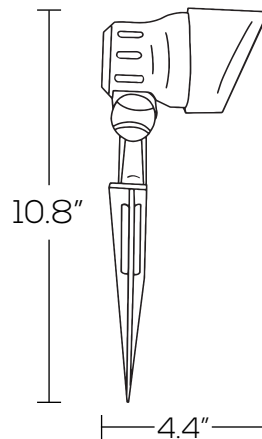

10284

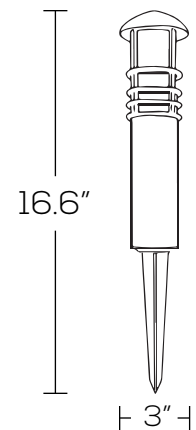



LNDX

LED ALUMINUM
LANDSCAPE
LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> LNDX	<input checked="" type="checkbox"/> 3000K	<input checked="" type="checkbox"/> 3W	<input type="checkbox"/> 60°	<input checked="" type="checkbox"/> 12V
			<input type="checkbox"/> 360°	

SES-LNDX-108-3W
Example Model Number

SES - LNDX - 3000 - 3W - - 12

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

Common Stock Models:

Optional Accessories:

Item #	Model #
10282	SES-LNDX-108-3W
10283	SES-LNDX-911-5W
10284	SES-LNDX-987-3W

Item #	Model #
10914	SES-QUICK CONNECTOR