

CRI

PF

95

0.9

B MOONLIGHT

D	ro	jeo	сt	:
	10	jeo	- L	

Name:

Type:

Date:





OVERVIEW

Tunable: 3000K, 4000K, 5000K Applications: IP54 Efficacy: 20-30lm/W Dimming: TRIAC LED Type: SMD 2835 Driver: BQE15K035040TDS2 Operating Temp: -40° to 104° F Operating Humidity: 10%-65% RH Lifespan: 30,000 Hours Warranty: 3 Years

FEATURES

- Includes a CCT Tunable switch; easily select between three color temperatures
- Available in two finishes: black and bronze
- Protected from the elements with an IP54 rating making it suitable for rainy environments





Size	7.8" W x 18" H x 3.8" D	Lumens	336lm
Watts	15W	CCT Tunable	3000K - 4000K - 5000K
Voltage	120V	IP Rating	IP54
Dimming	TRIAC	Materials	Aluminum, Acrylic
Beam Angle	N/A	Finish	Black, Bronze

The SARIN Moonlight Series features elegant, outdoor wall sconces that add functional lighting and brilliance to any area. Constructed from solid aluminum, this fixture boasts a sleek look with a black or bronze finish and features color temperature tuning. This light features a partition at the top, directing the light outward, providing an aesthetically pleasing effect in any environment.

Lens

Lifespan

Frosted

30,000 Hours

LED Wall Sconces are safe to use in wet locations that come in direct contact with rain and water. The fixtures have a switch to change between three color temperatures. This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.

Project:

Type:




Name:_

Date:_

PHOTOMETRICS:


X° Beam Angle: (Polar Candela Dist.)




Light Distance: (Illuminance at a Distance)

Illuminance at a Distance						
	Center Beam fc	Beam Width				
1.78	172 fc 🤺	3.1 ft	1.2 ft			
3.3R	45.7 fc	6.0 ft	2.4 ft			
5.0R	19.9 fc	9.1 ft	3.6 ft			
6.7ft	11.1 fc	12.2 ft	4.9 ft			
8.3R	7.23 fc	15.1 ft	6.0 ft			
10.0ft	4.98 fc	18.2 ft	7.3 ft			
Vert. Spread: 84.7° Horiz. Spread: 40.0°						

DIMENSIONS:

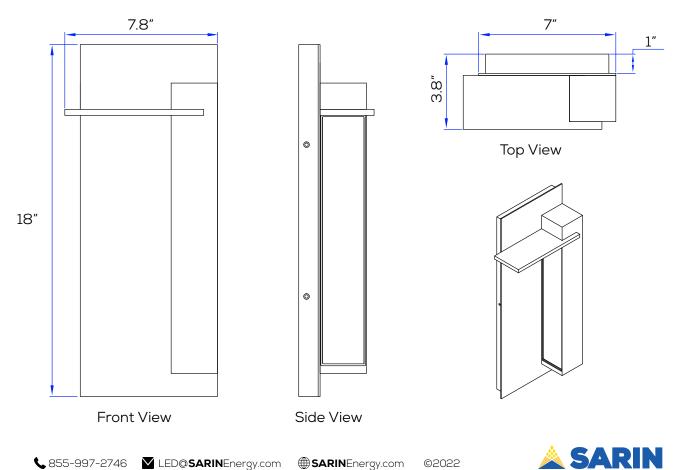

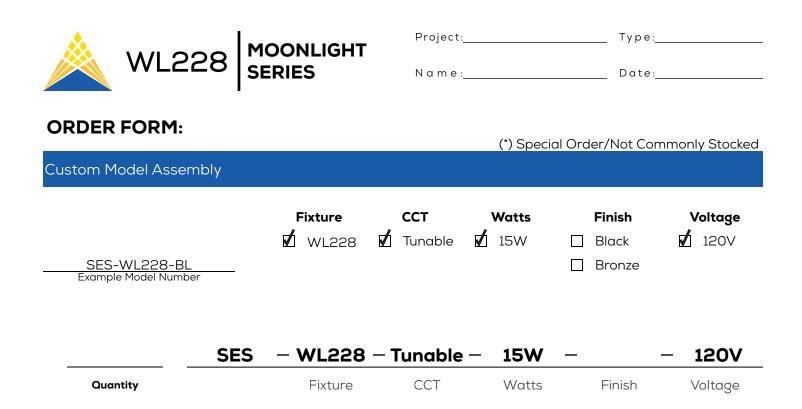

Common Stock Models:

ltem #	Model #		
11215	SES-WL228-BL		
11223	SES-WL228-BR		