

Project:

Name:_

Type:_____

Date:_



Size	7" H x 9.8" W x 7.9" D	Lumens	900lm
Watts	13W	ССТ	Tunable
Voltage	110-240V	IP Rating	I P54
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	110°	Finish	Matte Black
CRI	85	Lens	Frosted
PF	0.8	Lifespan	30,000 Hours
			1

SARIN LED Decorative Outdoor Wall Sconces add functional lighting with a design element to any outdoor area. Constructed from solid aluminum, this fixture features a swiveling lamp, allowing you to direct the light 340° directions. The finish is a dark gray and includes a CCT tunable switch.

This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.

LED Wall Sconces are safe to use in wet locations that come in direct contact with rain and water. This light has a switch to change between three color temperatures.



OVERVIEW

CCT: Tunable Applications: IP54 Efficacy: 65-75 Im/W Dimming: Non-Dimming LED Type: Everlight 2835 Driver: KEGU Operating Temp: -20° to 40° F Operating Humidity: 10%-65% RH Lifespan: 30,000 Hours Warranty: 2 Years

FEATURES

- Includes a CCT Tunable switch; easily select between three color temperatures
- Protected from the elements with an IP54 rating making it suitable for rainy environments
- Frosted lens protects the eyes from glare while adding a warm, rich light



Project:

_____Type:_




N a m e :_

Date:_

PHOTOMETRICS:


X° Beam Angle: (Polar Candela Dist.)



Light Distance: (Illuminance at a Distance)

	Illuminance at a	Distance	
	Center Beam fc	Beam Wid	th
	106 fc	5.5 ft	4.6 ft
1.7R	10010	5.5 IC	4.0 IC
3.3ft	28.1 fc	10.6 ft	9.0 ft
5.0ft	12.3 fc	16.0 ft	13.7 ft
6.7R	6.82 fc	21.5 ft	18.3 ft
	4.45 fc	26.6 ft	22.7 ft
8.3R			
10.0 R	3.06 fc	32.1 ft	27.3 ft
	Vert. Spread: 116.1°		
	Horiz. Spread: 107.6°		
	,		

DIMENSIONS:

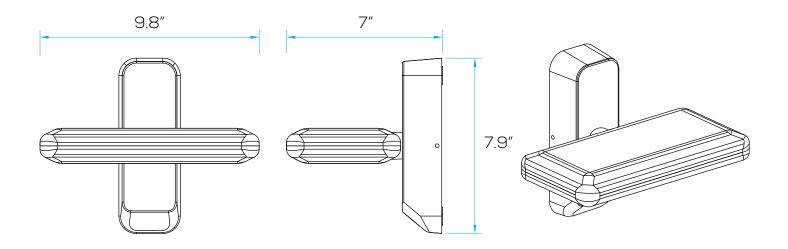





ORDER FORM:

			(*) Specio	al Order/Not Com	monly Stocked
Custom Model Assembly					
SES-WL1961S-CCT-13 Example Model Number	Fixture ☑ WL1961S	CCT ☑ Tunable	Watts	Beam Angle	Voltage ☑ 110-240V
SES	-WL1961S-	Tunable -	- 13W Watts	— 110° – Beam Angle	- 110-240V Voltage

Common Stock Models:

ltem #	Model #	
11244	SES-WL1961S-CCT-13	

