



# WL5651

## LED CCT OUTDOOR WALL SCONCE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



### OVERVIEW

**CCT:** Tunable

**Applications:** IP54

**Efficacy:** 40-50lm/W

**Dimming:** Non-Dimming

**LED Type:** SMD 2835

**Driver:** BOE15K035040TDS2

**Operating Temp:** -20° to 40° F

**Operating Humidity:** 10%-65% RH

**Lifespan:** 30,000 Hours

**Warranty:** 3 Years

### FEATURES

- Includes a CCT Tunable switch – easily select among three color temperatures
- Protected from the elements with an IP54 rating making it suitable for rainy environments
- Frosted lens protects the eyes from glare while adding a warm, rich light

|                   |                          |                    |              |
|-------------------|--------------------------|--------------------|--------------|
| <b>Size</b>       | 10" H x 7.9" W x 11.7" D | <b>Lumens</b>      | 550lm        |
| <b>Watts</b>      | 13W                      | <b>CCT Tunable</b> | Tunable      |
| <b>Voltage</b>    | 110-240V                 | <b>IP Rating</b>   | IP54         |
| <b>Dimming</b>    | Non-Dimming              | <b>Materials</b>   | Aluminum, PC |
| <b>Beam Angle</b> | 110°                     | <b>Finish</b>      | Matte Black  |
| <b>CRI</b>        | 80                       | <b>Lens</b>        | Frosted      |
| <b>PF</b>         | 0.8                      | <b>Lifespan</b>    | 30,000 Hours |

SARIN LED Decorative Outdoor Wall Sconces add functional lighting with a design element to any outdoor area. Constructed from solid aluminum, this fixture boasts a clean look with a matte black finish and features a CCT tunable switch. This bowl-shaped wall light projects downward through its open bottom. The top opaque filter allows for a full, robust lighting environment. The light has a PC diffuser, providing a soft consistent light. The shade allows light to be distributed to the top and bottom.

This decorative LED wall sconce is ideal for exterior walls on hotels, homes, and offices. LED Wall Sconces are safe to use in wet locations that come in direct contact with rain and water. This light has a switch to change between three color temperatures.



# WL5651 | LED CCT OUTDOOR WALL SCONCE


Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

X° Beam Angle: (Polar Candela Dist. )




Light Distance: (Illuminance at a Distance)

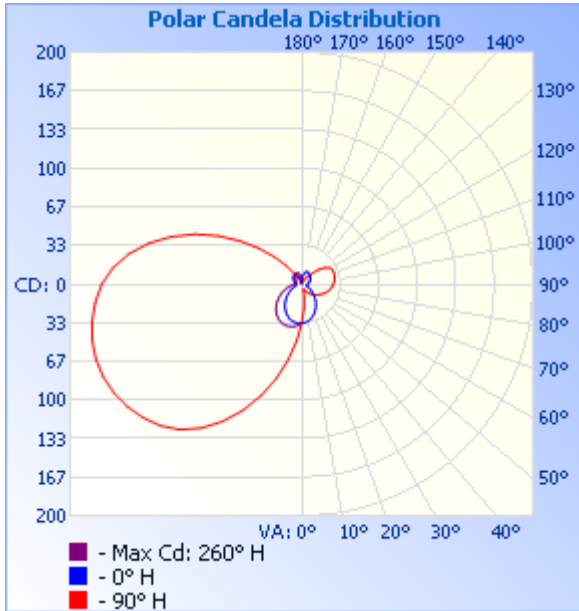

|        | Center Beam fc | Beam Width |        |
|--------|----------------|------------|--------|
| 1.7ft  | 11.7 fc        | 5.3 ft     | 1.5 ft |
| 3.3ft  | 3.09 fc        | 10.4 ft    | 2.9 ft |
| 5.0ft  | 1.35 fc        | 15.7 ft    | 4.4 ft |
| 6.7ft  | 0.75 fc        | 21.0 ft    | 5.9 ft |
| 8.3ft  | 0.49 fc        | 26.1 ft    | 7.3 ft |
| 10.0ft | 0.34 fc        | 31.4 ft    | 8.7 ft |

■ Vert. Spread: 115.0°  
■ Horiz. Spread: 47.2°

## DIMENSIONS:

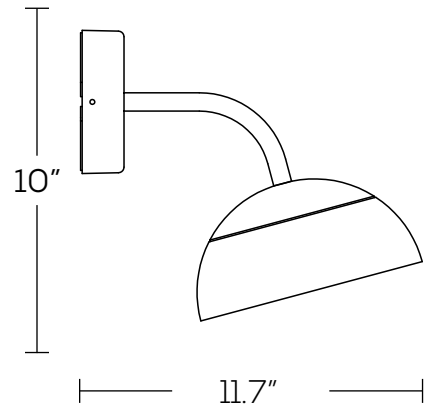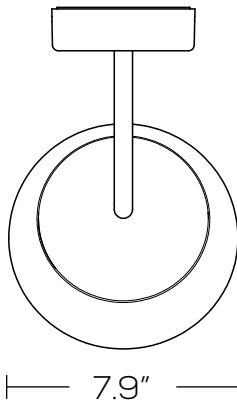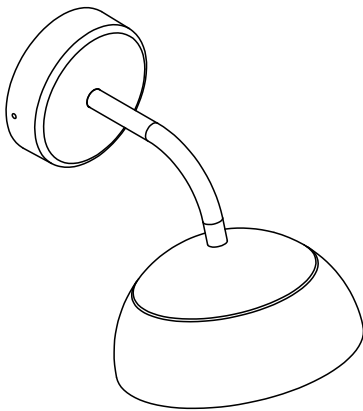



WL5651

**LED CCT  
OUTDOOR  
WALL SCNCE**

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

**ORDER FORM:**

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

| Fixture                                    | CCT   | Watts                                   | Beam Angle                               | Voltage                                      |
|--|---|---|--|--|
| <input checked="" type="checkbox"/> WL5651 | <input checked="" type="checkbox"/> Tunable | <input checked="" type="checkbox"/> 13W | <input checked="" type="checkbox"/> 110° | <input checked="" type="checkbox"/> 110-240V |

SES-WL5651-CCT-13  
Example Model Number

**SES – WL5821 – Tunable – 13W – 110° – 110-240V**

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

**Common Stock Models:**

| Item # | Model #           |
|--------|-------------------|
| 11243  | SES-WL5651-CCT-13 |