




# BLR22SS | LED BLRL22SS | BOLLARD

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

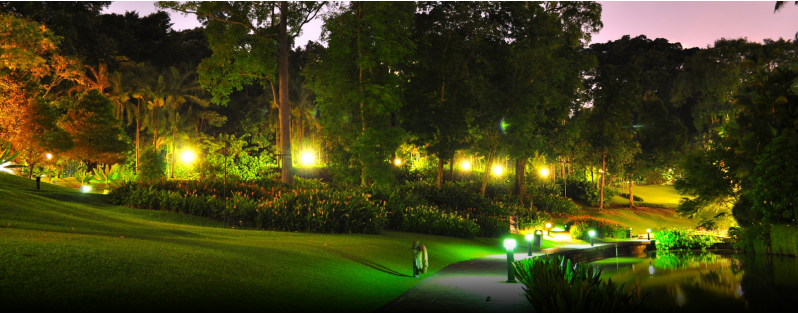

← Louvered

## OVERVIEW

**Tunable:** CCT 3000K-4000K-5000K

**Applications:** Outdoor IP65

**Efficacy:** 125lm/W

**Dimming:** 0-10V

**LED Type:** Lumileds 2835

**Lens Type:** Clear

**Driver:** Weledpower

**Operating Temp:** -40° to 113° F

**Operating Humidity:** 10-65% RH

**Lifespan:** 50,000 Hours

**Warranty:** 5 Years

## FEATURES

- Adjustable CCT, Wattage, and Dimming
- Protected from the elements with an IP65 rating making it suitable for wet conditions
- Powder Coated Bronze finish looks great in any location
- Durable aluminum housing protects from wear and tear

## OPTIONAL ACCESSORIES

- Interchangeable & Replacement Bollard Heads
- Light Detecting Photocell Sensor

<b>Size</b>	6.3" x 6.3" x 42.1"
<b>Watts</b>	12W-16W-22W
<b>Voltage</b>	AC120-277V
<b>Dimming</b>	0-10V
<b>Beam Angle</b>	N/A
<b>CRI</b>	>80
<b>PF</b>	>0.9

<b>Lumens</b>	Standard: 2750lm Louvered: 1540lm
<b>CCT</b>	3000K-4000K-5000K
<b>IP Rating</b>	IP65
<b>Materials</b>	Aluminum, PC
<b>Finish</b>	Bronze
<b>Lens</b>	Clear
<b>Lifespan</b>	50,000 hrs

SARIN's LED BOLLARDS are an excellent choice to provide long lasting, energy efficient LED lighting for your outdoor spaces. Perfect for exterior pathways and open spaces, the lights feature a tall, modern profile. The bollard has an aluminum housing, providing corrosion resistance ideal for areas with heavy traffic.

This decorative LED bollard light fixture is ideal for exterior commercial, hospitality and municipal applications.



Replaceable, interchangeable heads are available.







## PHOTOMETRICS:

### Standard

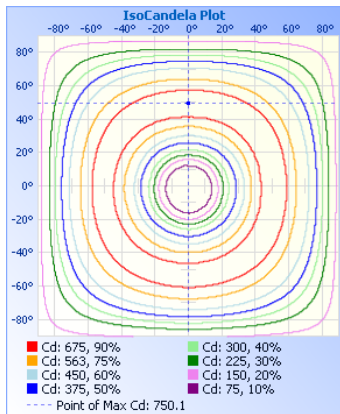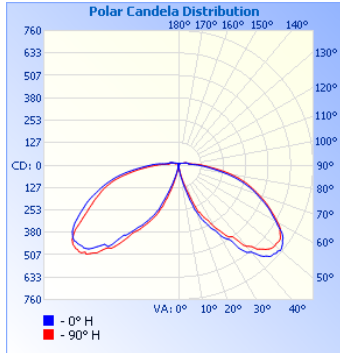


### Louvered

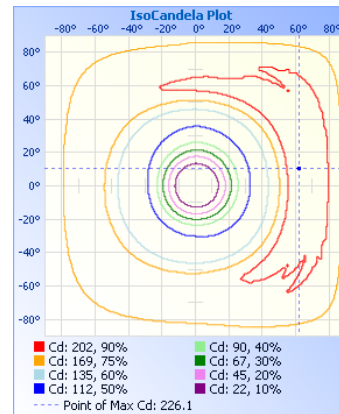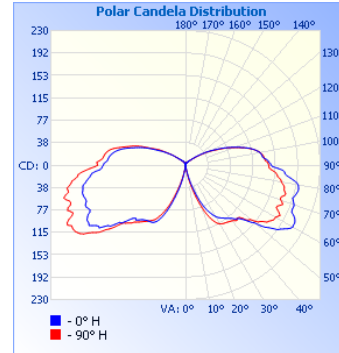

## IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

## DIMENSIONS:

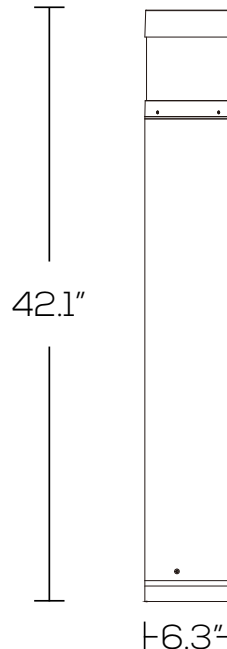



# BLR22SS | LED BLRL22SS | BOLLARD

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	Head Style	CCT	Watts	Voltage
<input checked="" type="checkbox"/> BLR22SS	<input type="checkbox"/> Standard	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 22W	<input checked="" type="checkbox"/> 120-277V
<input checked="" type="checkbox"/> BLRL22SS	<input type="checkbox"/> Louvered			

SES-BLR22SS-CCT-22  
Example Model Number

\_\_\_\_\_ **SES** - **BLR** - \_\_\_\_\_ - **Tunable** - **22** - **120-277**  
 Quantity                      Fixture                      Head Style                      CCT                      Watts                      Voltage


### Common Stock Models:

Item #	Model #
11131	SES-BLR22SS-CCT-22
11132	SES-BLRL22SS-CCT-22

### Optional Accessories:


Replacement Heads	
11136	SES-BLRL22SS-HEAD
11137	SES-BLRL22SS-HEAD

11136



Flat Louvered Head

11137



Round Louvered Head