




MWP09 | CCT MINI WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

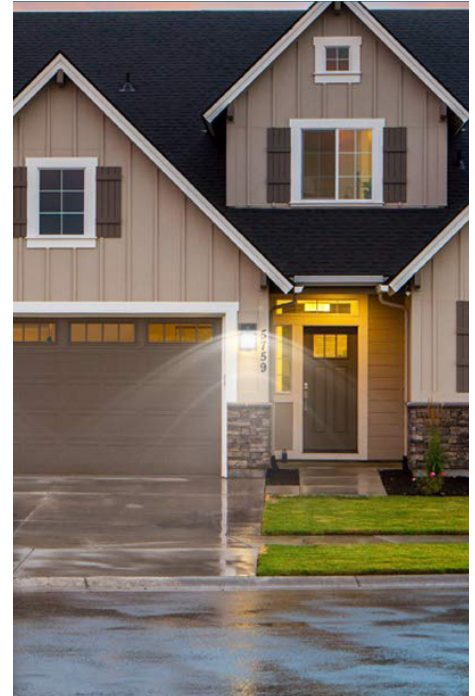

Size	5" W x 8.2" H x 2.8" D	Lumens	2,014lm - 4,050lm
Watts	20W, 30W	CCT Tunable	3000K-4000K-5000K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Aluminum, PC
Beam Angle	100°	Finish	Bronze
CRI	>80	Lens	Clear
PF	≥0.9	Lifespan	50,000 Hours

OVERVIEW

- Tunable:** CCT
- Applications:** IP65
- Efficacy:** 128-140lm/W
- Dimming:** 0-10V
- LED Type:** Lumileds 2835
- Lens Type:** Clear
- Driver:** HB-FL19F025 (20W & 30W)
- Operating Temp:** -40F° to 113F°
- Operating Humidity:** 10% - 90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

SARIN LED MINI WALL PACKS are commonly used to replace high-pressure sodium and metal halide lights to provide energy savings of up to 70%. These lights provide great lighting to poorly lit areas. They are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers.

This wall pack adopts the latest technology, replacing traditional bulbs with energy efficient LEDs. These are widely used in the lighting of homes, hotels, offices, hallways, garages, streets, landscapes and other commercial spaces. These fixtures are suitable for a variety of applications.

FEATURES

- Offers cool white light with a 100° beam spread
- Photocell Light Sensor automatically activates the lights when dark







PHOTOMETRICS:

20W

30W

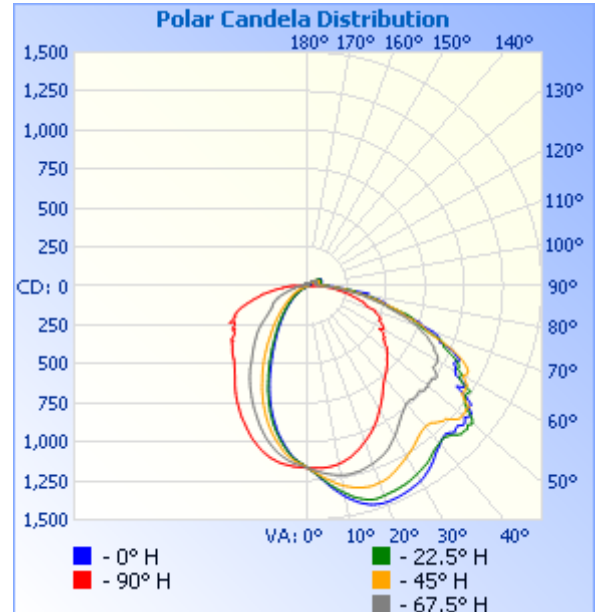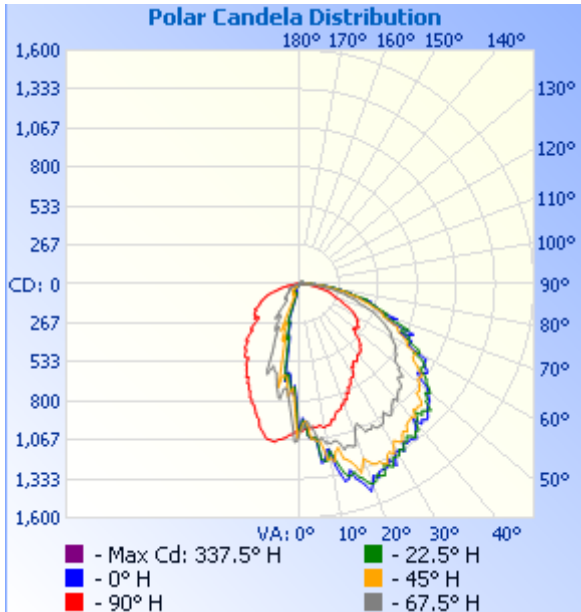

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	54.5 fc	6.0 ft	8.9 ft
8.7ft	13.3 fc	12.0 ft	17.9 ft
13.0ft	5.97 fc	18.0 ft	26.8 ft
17.3ft	3.37 fc	24.0 ft	35.7 ft
21.7ft	2.14 fc	30.0 ft	44.7 ft
26.0ft	1.49 fc	36.0 ft	53.6 ft


■ Vert. Spread: 69.4°
■ Horiz. Spread: 91.7°

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	63.1 fc	8.8 ft	14.5 ft
8.7ft	15.4 fc	17.9 ft	29.4 ft
13.0ft	6.90 fc	26.7 ft	44.0 ft
17.3ft	3.90 fc	35.6 ft	58.5 ft
21.7ft	2.48 fc	44.6 ft	73.4 ft
26.0ft	1.73 fc	53.4 ft	87.9 ft

■ Vert. Spread: 91.6°
■ Horiz. Spread: 118.8°

DIMENSIONS:

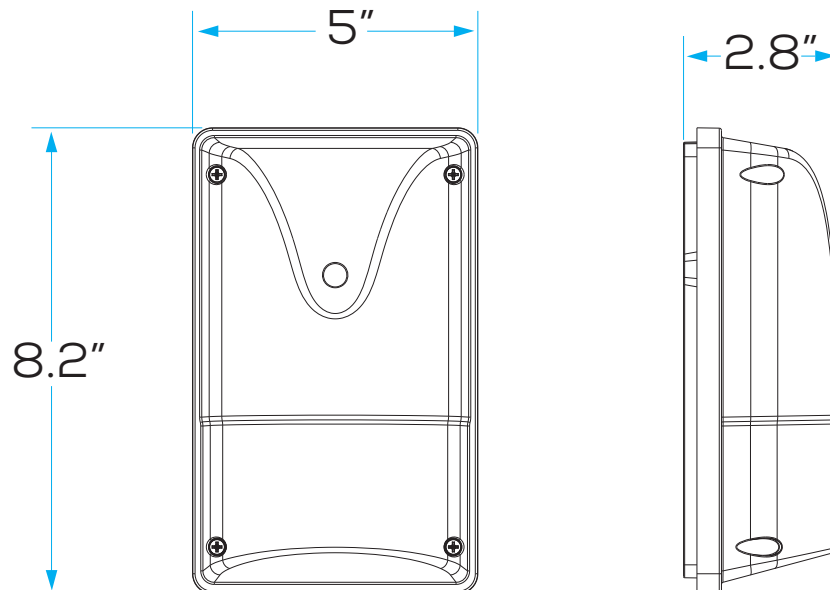



MWP09 | CCT MINI WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
_____	<input checked="" type="checkbox"/> MWP09	<input checked="" type="checkbox"/> Tunable	<input type="checkbox"/> 20W <input type="checkbox"/> 30W	<input checked="" type="checkbox"/> 100°	<input checked="" type="checkbox"/> 120-277V
_____	SES- Example Model Number				

_____	SES	– MWP09 – Tunable –	– 100° – 120-277V
Quantity	Fixture	CCT	Watts Beam Angle Voltage

Common Stock Models:

Item #	Model #
11336	SES-MWP09-CCT-20W
11337	SES-MWP09-CCT-30W