



# RDL3, RDL4

# 3" AND 4" FIRE-RATED GIMBALS

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



<b>Size</b>	3": 3.93" x 1.62" 4": 5.12" x 1.69"
<b>Watts</b>	6W 9W
<b>Voltage</b>	120V
<b>Dimming</b>	Triac
<b>Beam Angle</b>	36°
<b>CRI</b>	>90
<b>PF</b>	≥ 0.9

<b>Lumens</b>	500lm 800lm
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, 5000K
<b>IP Rating</b>	IP44
<b>Materials</b>	Aluminum, PC
<b>Finish</b>	White
<b>Lens</b>	Clear
<b>Lifespan</b>	50,000 Hours

## OVERVIEW

- CCT:** Tunable
- Applications:** Wet locations
- Efficacy:** 83-88lm/W
- Dimming:** Triac
- LED Type:** COB
- Lens Type:** Clear
- Operating Temp:** -4F° to 113F°
- Operating Humidity:** 10-65%RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

## FEATURES

- Fire-rated for 2 hours






# RDL3, RDL4 | 3" AND 4" FIRE-RATED GIMBALS

Project: \_\_\_\_\_ Type: \_\_\_\_\_


Name: \_\_\_\_\_ Date: \_\_\_\_\_

## DIMENSIONS:

### 3"

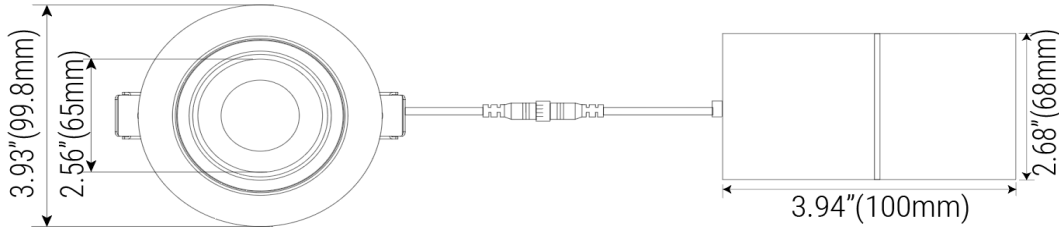

### 4"

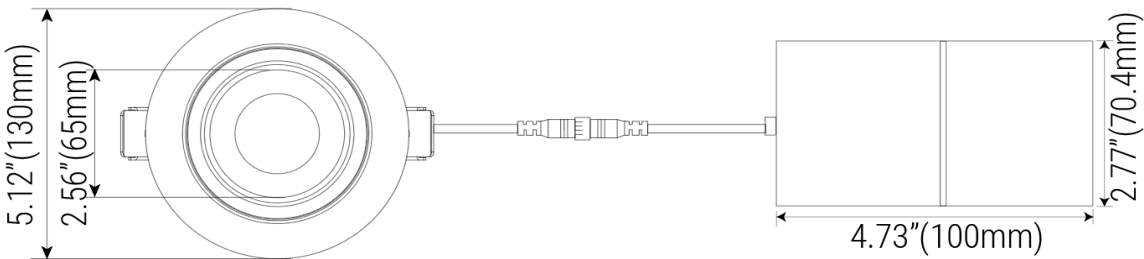


## IMPORTANT SAFEGUARDS:


1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

## SIDE VIEW:

### 3"

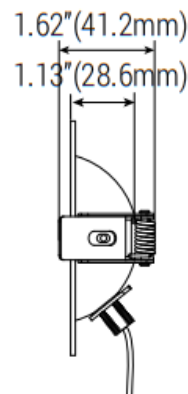

### 4"

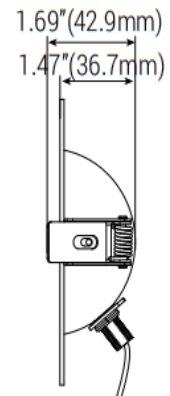



RDL3,  
RDL4

3" AND 4"  
FIRE-RATED  
GIMBALS

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

**ORDER FORM:**

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage	
	<input checked="" type="checkbox"/> RDL	<input checked="" type="checkbox"/> 2700K	<input type="checkbox"/> 6W	<input checked="" type="checkbox"/> 36°	<input checked="" type="checkbox"/> 120V	
		<input checked="" type="checkbox"/> 3000K	<input type="checkbox"/> 9W			
		<input checked="" type="checkbox"/> 3500K				
		<input checked="" type="checkbox"/> 4000K				
		<input checked="" type="checkbox"/> 5000K				
<u>SES-RDL3-CCT-6-FR</u> Example Model Number						
	<b>SES</b>	<b>— RDL3</b>	<b>— CCT</b>	<b>— 15W</b>	<b>— 36°</b>	<b>— 120V</b>
<b>Quantity</b>	Fixture	CCT	Watts	Beam Angle	Voltage	

**Common Stock Models:**



Item #	Model #
11653	SES-RDL3-CCT-6-FR
11654	SES-RDL4-CCT-6-FR