




SP06

LED CCT SPORT LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

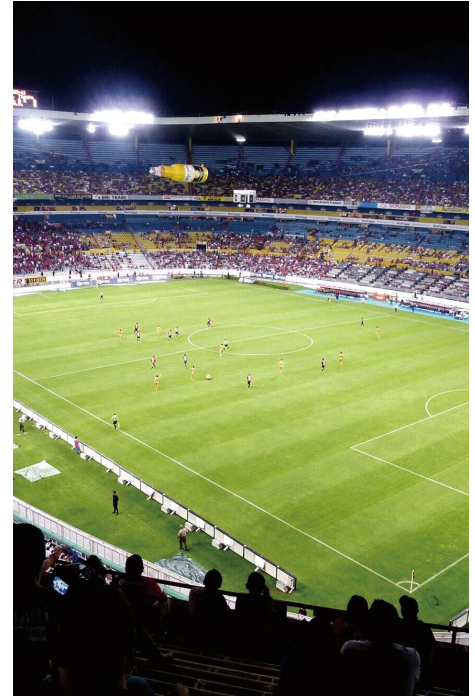

Watts	400W	600W	1000W
Lumens	56,000lm - 57,200lm	84,000lm - 85,800lm	140,000lm - 143,000lm
Size	See Dimensions	CCT	3000K-4000K-5700K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Die-Cast Aluminum
Beam Angle	30°	Finish	Black
CRI	>70	Lens	Clear
PF	≥ 0.9	Lifespan	50,000 Hours

OVERVIEW

- CCT:** Tunable
- Applications:** IP65
- Efficacy:** 140-143lm/W
- Dimming:** 0-10V
- LED Type:** SMD3030
- Lens Type:** Clear
- Driver:** TLD-480-C280-ENU, BLD-600-C420-ENU
- Operating Temp:** -40F° to 113F°
- Operating Humidity:** 20% - 90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

FEATURES

- High Focus and Low Glare Lens
- Instant Start, No Flickering, No Humming
- Photocontrol/ Surge Protector





SP06

LED CCT
SPORT LIGHT

Project: _____ Type: _____




Name: _____ Date: _____

PHOTOMETRICS:

400W:

600W:

1000W:

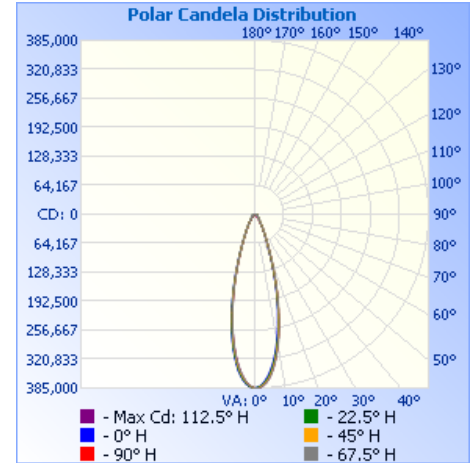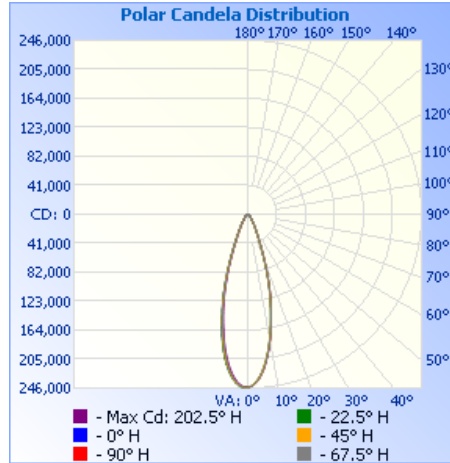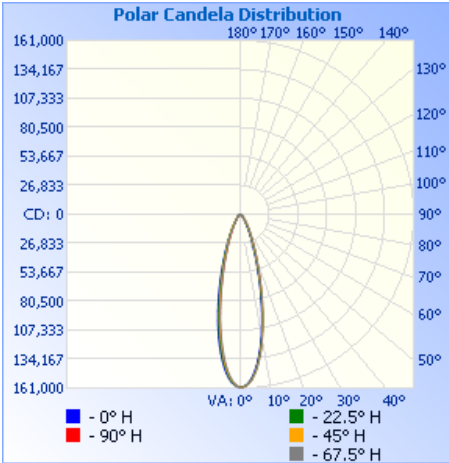

Illuminance at a Distance

	Center Beam fc	Beam Width	
16.7ft	574 fc	8.5 ft	8.2 ft
33.3ft	144 fc	17.0 ft	16.4 ft
50.0ft	64.0 fc	25.5 ft	24.7 ft
66.7ft	36.0 fc	34.0 ft	32.9 ft
83.3ft	23.1 fc	42.5 ft	41.1 ft
100.0ft	16.0 fc	51.0 ft	49.4 ft

Vert. Spread: 28.6°
Horiz. Spread: 27.7°

Illuminance at a Distance

	Center Beam fc	Beam Width	
16.7ft	878 fc	9.4 ft	9.4 ft
33.3ft	221 fc	18.8 ft	18.7 ft
50.0ft	98.0 fc	28.2 ft	28.1 ft
66.7ft	55.0 fc	37.6 ft	37.5 ft
83.3ft	35.3 fc	47.0 ft	46.8 ft
100.0ft	24.5 fc	56.4 ft	56.2 ft

Vert. Spread: 31.5°
Horiz. Spread: 31.4°

Illuminance at a Distance

	Center Beam fc	Beam Width	
16.7ft	1,378 fc	8.9 ft	8.9 ft
33.3ft	347 fc	17.7 ft	17.7 ft
50.0ft	154 fc	26.5 ft	26.6 ft
66.7ft	86.4 fc	35.4 ft	35.5 ft
83.3ft	55.4 fc	44.2 ft	44.3 ft
100.0ft	38.4 fc	53.1 ft	53.2 ft

Vert. Spread: 29.7°
Horiz. Spread: 29.8°




SP06 | LED CCT SPORT LIGHT

Project: _____ Type: _____


Name: _____ Date: _____

DIMENSIONS:


400W

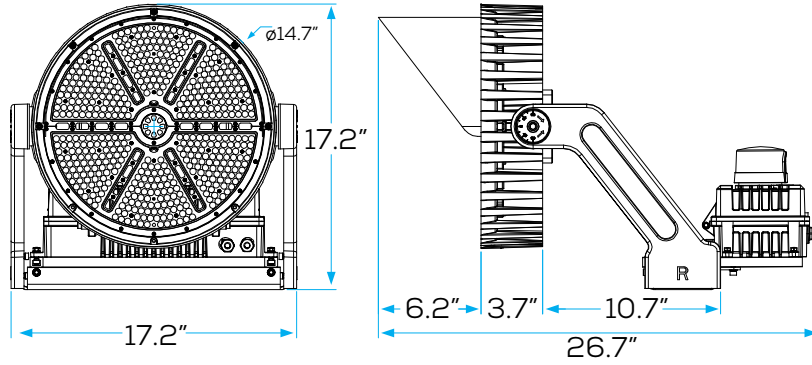

600W

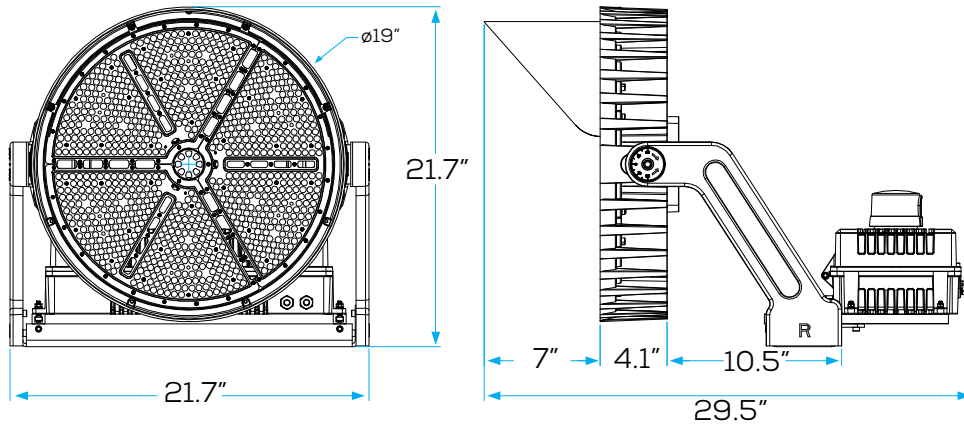

1000W

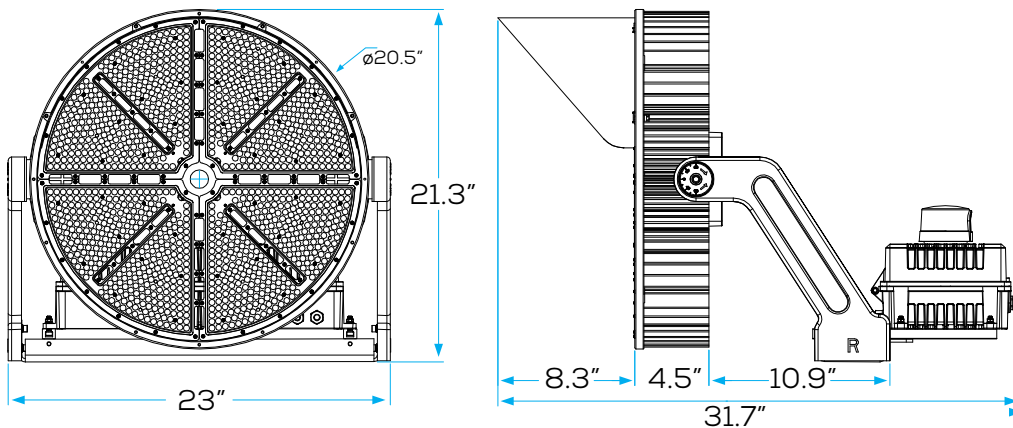



SP06

LED CCT SPORT LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> SP06	<input checked="" type="checkbox"/> Tunable	<input type="checkbox"/> 400W	<input checked="" type="checkbox"/> 30°	<input checked="" type="checkbox"/> 120-277V
		<input type="checkbox"/> 600W		
		<input type="checkbox"/> 1000W		

SES-SP06-CCT-400
Example Model Number

SES — SP06 — Tunable — 30° — 120-277V

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

Common Stock Models:

Item #	Model #
11328	SES-SP06-CCT-400
11330	SES-SP06-CCT-600W
11332	SES-SP06-CCT-1000W

Optional Accessories:

Item #	Model #	QTY:
10899	JL-205C-PHOTOCELL	
11328-A	SES-SP06-SLIP	
11328-B	SES-SP06-SHIELD	
11328-C	SES-SP06-LENS	
11328-D	SES-SP06-CORD	



Slip Fitter



Shield



Lens



#14 Cord