




DL2,
DL3

CCT MINI
ADJUSTABLE
DOWNLIGHT

Project: _____ Type: _____

Name: _____ Date: _____



OVERVIEW

CCT: Adjustable

Applications: Wet (IP44)

Efficacy: 70lm/W

Dimming: TRIAC

LED Type: COB

Operating Temp: -4°F to 113°F

Lifespan: 50,000 hours

Warranty: 5 years

Size	2": 2.56" x 2.56" x 3.38" 3": 3.35" x 3.35" x 3.43"
Watts	9W, 12W
Voltage	AC120V (50/60Hz)
Dimming	TRIAC
Beam Angle	38°
CRI	≥90
PF	≥ 0.9

Lumens	±630lm ± 860lm
CCT	2700K + 3000K + 3500 4000K + 5000K
IP Rating	IP44
Materials	Aluminum, PC
Finish	White + Black
Lens	Frosted
Lifespan	50,000 Hours

FEATURES

- Flicker Free
- 360° rotation,
- CRI of 90 renders light temperature consistently in various environments, giving colors true clarity
- LED Adjustable CCT Downlights are perfect for homes, schools, offices and hotels
- Extra long lifetime

SARIN Architectural Mini Downlights are commonly used in spaces with high ceilings like hotels, living spaces, schools, and offices. These stylish lights offer adjustable colors, 360° rotation, 20° tilt, and narrow beam angles of 38° to highlight architectural or artistic elements in your home. They are dimmable to 10%. Get comfortable, diffused light with no flickering.







DL2,
DL3

CCT MINI
ADJUSTABLE
DOWNLIGHT

Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

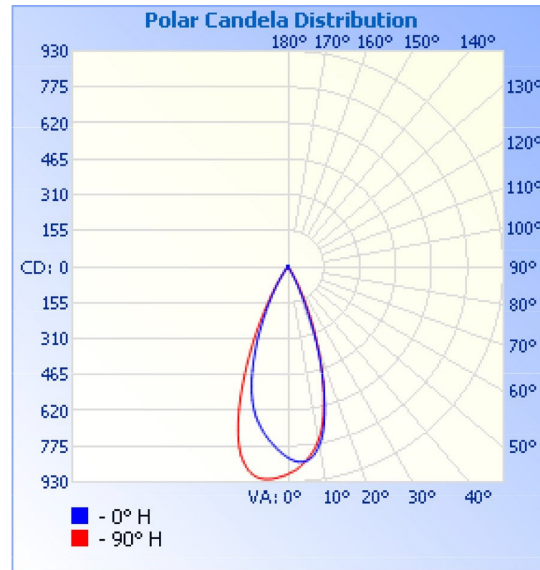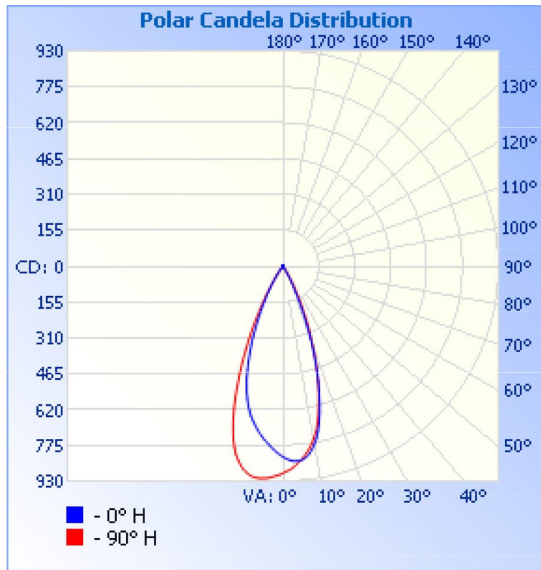

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	133 fc	4.2 ft	4.2 ft
3.3ft	35.3 fc	8.2 ft	8.2 ft
5.0ft	15.4 fc	12.4 ft	12.5 ft
6.7ft	8.56 fc	16.6 ft	16.7 ft
8.3ft	5.58 fc	20.5 ft	20.7 ft
10.0ft	3.84 fc	24.7 ft	24.9 ft

■ Vert. Spread: 102.1°
■ Horiz. Spread: 102.5°

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	133 fc	4.2 ft	4.2 ft
3.3ft	35.3 fc	8.2 ft	8.2 ft
5.0ft	15.4 fc	12.4 ft	12.5 ft
6.7ft	8.56 fc	16.6 ft	16.7 ft
8.3ft	5.58 fc	20.5 ft	20.7 ft
10.0ft	3.84 fc	24.7 ft	24.9 ft

■ Vert. Spread: 102.1°
■ Horiz. Spread: 102.5°

WARNING:

1. Risk of fire or electric shock. LED Adjustable CCT Downlight installation requires knowledge of lighting electrical systems. If not qualified contact a certified electrician for installation.
2. Install this kit only in luminaires that have the construction features and dimensions shown in the drawings and where the input rating of the retrofit kit does not exceed the voltage rating of the luminaire.
3. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
4. To prevent damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
5. This luminaire has been built to operate LED lamps. Do not attempt to install fluorescent lamps in this light.

