




**NFWW  
115**

**CCT DUAL BEND  
FLEX WALL  
WASHER**

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



<b>Size</b>	16.4' x 0.9" x 0.9"
<b>Watts</b>	17W/M [5.18W/ft.]
<b>Voltage</b>	24V
<b>Dimming</b>	PWM
<b>Beam Angle</b>	30°
<b>CRI</b>	>80
<b>PF</b>	1

<b>Lumens</b>	1700lm/M [520lm/ft.]
<b>CCT Tunable</b>	2700K+6500K
<b>IP Rating</b>	IP65
<b>Materials</b>	Copper, Silicone
<b>Finish</b>	White
<b>Lens</b>	Clear
<b>Lifespan</b>	50,000 Hours

## OVERVIEW

**CCT Tunable:** 2700K+6500K

**Applications:** IP65

**Efficacy:** 100lm/W

**Dimming:** PWM

**LED Type:** SMD3030

**Lens Type:** Clear

**Operating Temp:** -4° to 113° F

**Lifespan:** 50,000 Hours

**Warranty:** 3 Years

## FEATURES

- Fixture is controlled by a DMX Remote and can achieve a variety of scene changes
- Power supply feed can be configured from the side or bottom
- Lengths can be cut every 19.7" for full customization



SARIN LED CCT Dual Bend Flex Wall Washers offer bright and uniform lighting to any building with long-lasting LEDs. Dual-bend flex casing can be fixed to a variety of curved and complex surfaces. The material is optimized for softer bending and twisting, making it more versatile than traditional wall washers.

They come in a variety of color temperature settings and produce high refresh rates for smooth transitional experiences. These lights are suited to architectural settings, both indoors and outdoors, to decorate spaces and to highlight buildings, gardens, and restaurants, producing a bright and dynamic environment.





NFWW  
115

CCT DUAL BEND  
FLEX WALL  
WASHER



Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

### PHOTOMETRICS:

#### 2700K

#### 6500K

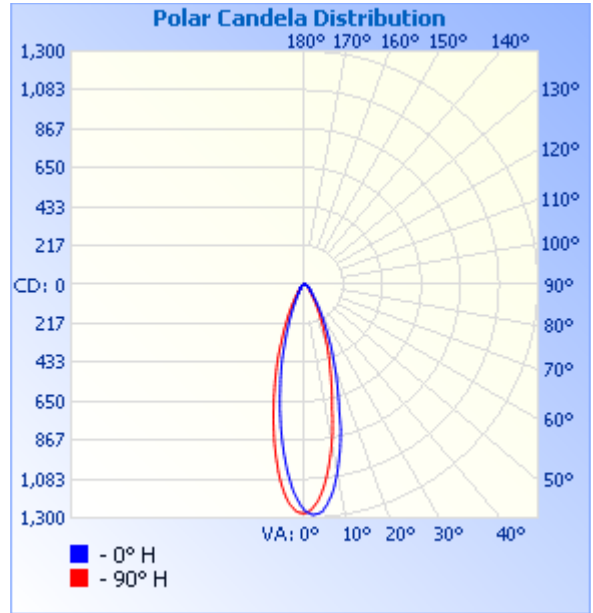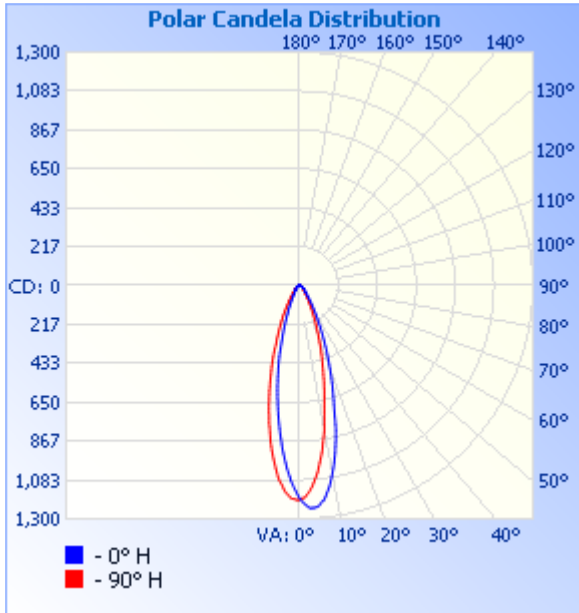

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
4.3ft	64.0 fc	2.2 ft	2.2 ft
8.7ft	15.6 fc	4.5 ft	4.5 ft
13.0ft	7.00 fc	6.7 ft	6.7 ft
17.3ft	3.95 fc	8.9 ft	8.9 ft
21.7ft	2.51 fc	11.2 ft	11.1 ft
26.0ft	1.75 fc	13.4 ft	13.3 ft


■ Vert. Spread: 29.0°  
■ Horiz. Spread: 28.8°

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
4.3ft	68.0 fc	2.3 ft	2.3 ft
8.7ft	16.6 fc	4.6 ft	4.6 ft
13.0ft	7.44 fc	6.8 ft	6.8 ft
17.3ft	4.20 fc	9.1 ft	9.1 ft
21.7ft	2.67 fc	11.4 ft	11.4 ft
26.0ft	1.86 fc	13.6 ft	13.6 ft

■ Vert. Spread: 29.4°  
■ Horiz. Spread: 29.4°

### DIMENSIONS:

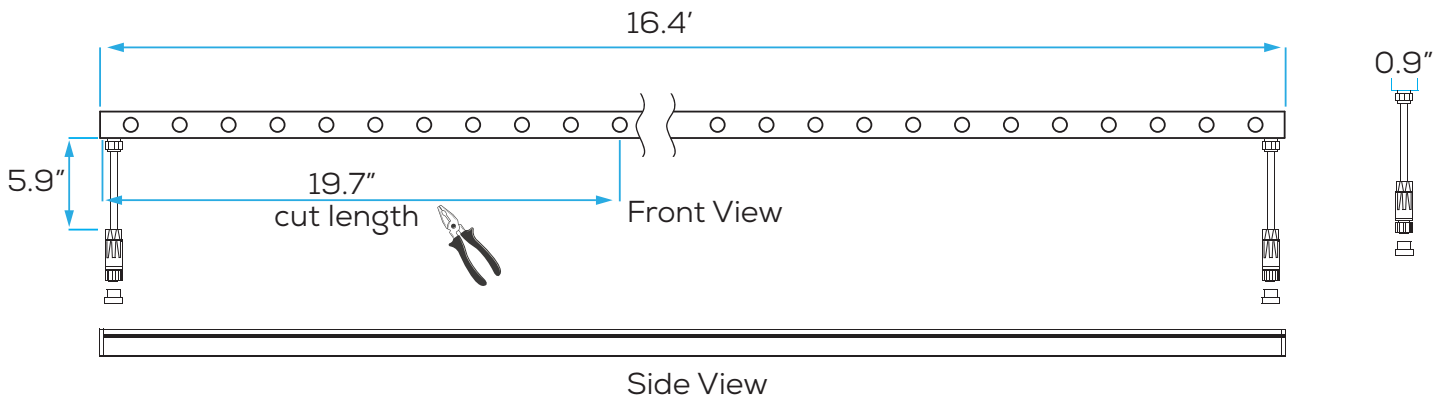



NFWW 115

CCT DUAL BEND FLEX WALL WASHER

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

<b>Fixture</b>	<b>CCT</b>	<b>Watts</b>	<b>Beam Angle</b>	<b>Voltage</b>
<input checked="" type="checkbox"/> NFWW	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 17W/M	<input type="checkbox"/> 30°	<input checked="" type="checkbox"/> 24V
			<input type="checkbox"/> 45°*	
			<input type="checkbox"/> 60°*	

SES-NFWW115-CCT-17  
Example Model Number

**SES – NFWW – Tunable – 17W/M – – 24V**

<b>Quantity</b>	<b>Fixture</b>	<b>CCT</b>	<b>Watts</b>	<b>Beam Angle</b>	<b>Voltage</b>
-----------------	----------------	------------	--------------	-------------------	----------------


Common Stock Models:

Item #	Model #
11265	SES-NFWW115-CCT-17

Optional Accessories:

Item #	Model #	QTY
41265-A	SES-NFWW115-PSU	
41265-B	SES-NFWW115-MALE	
41265-C	SES-NFWW115-FEMALE	
41265-D	SES-NFWW115-BRACKETS	
41265-E	SES-NFWW115-CLIPS	
41265-F	SES-NFWW115-ANGLEBRACKET	
41265-G	SES-NFWW115-CHANNEL-1M	
41265-H	SES-NFWW115-FLEXBRACKET	

Wall Washing Performance to the Wall (Horizontal mounting on the floor)

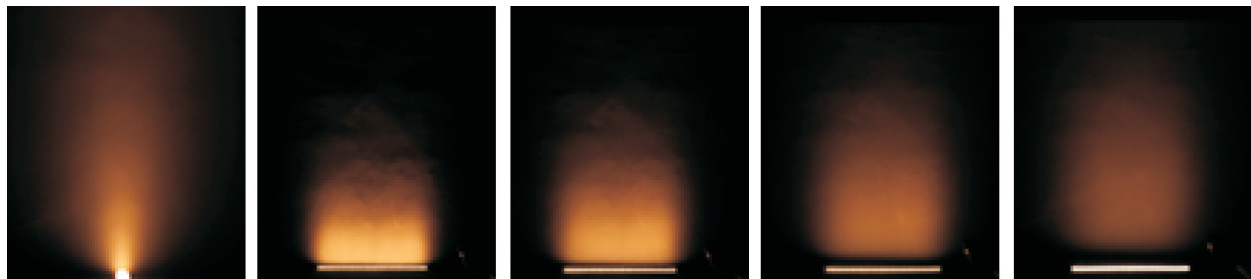

30° Side View

30° Front View

30° Front View

30° Front View

30° Front View

Distance to the wall is 2"  
Wall wash height is 59"

Distance to the wall is 4"  
Wall wash height is 79"

Distance to the wall is 7.9"  
Wall wash height is 118"

Distance to the wall is 12"  
Wall wash height is 150"