




NFWW
121

**RGBW DUAL
BEND FLEX
WALL WASHER**

Project: _____ Type: _____

Name: _____ Date: _____

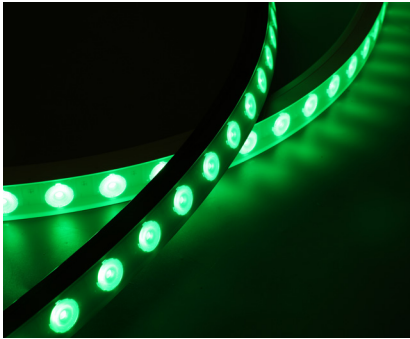

Size	16.4" x 1.3" x 0.9"
Watts	25W/M [7.62W/ft.]
Voltage	24V
Dimming	PWM
Beam Angle	25°
CRI	>80
PF	1

Lumens	950lm/M [290lm/ft.]
CCT Tunable	DMX RGBW (3000K)
IP Rating	IP65
Materials	Copper, Silicone
Finish	White
Lens	Clear
Lifespan	50,000 Hours

OVERVIEW

CCT Tunable: DMX RGBW (3000K)

Applications: IP65

Efficacy: 40lm/W

Dimming: PWM

LED Type: SMD5050

Lens Type: Clear

Operating Temp: -4° to 113° F

Lifespan: 50,000 Hours

Warranty: 3 Years

FEATURES

- Fixture is controlled by a DMX Remote and can achieve a variety of scene changes
- Power supply feed can be configured from the side or bottom
- Lengths can be cut every 9.8" for full customization



SARIN LED RGBW Dual Bend Flex Wall Washers offer bright and uniform lighting to any building with long-lasting LEDs. Dual-bend flex casing can be fixed to a variety of curved and complex surfaces. The material is optimized for softer bending and twisting, making it more versatile than traditional wall washers.

They come in a variety of color settings and produce high refresh rates for smooth transitional experiences. These lights are suited to architectural settings, both indoors and outdoors, to decorate spaces and to highlight buildings, gardens, and restaurants, producing a bright and dynamic environment.





NFWW
121


RGBW DUAL
BEND FLEX
WALL WASHER

Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

3000K

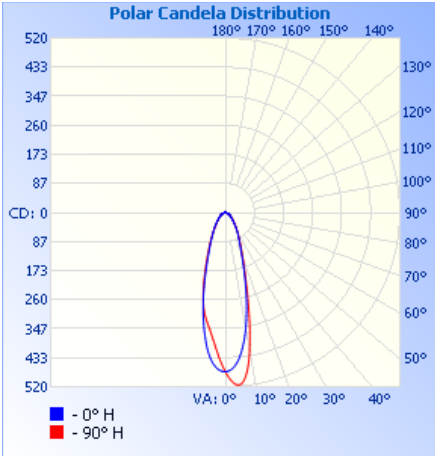


Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	25.7 fc	2.1 ft	2.3 ft
8.7ft	6.27 fc	4.3 ft	4.6 ft
13.0ft	2.81 fc	6.5 ft	6.9 ft
17.3ft	1.58 fc	8.6 ft	9.2 ft
21.7ft	1.01 fc	10.8 ft	11.5 ft
26.0ft	0.70 fc	12.9 ft	13.8 ft

■ Vert. Spread: 27.9°
■ Horiz. Spread: 29.8°

Blue

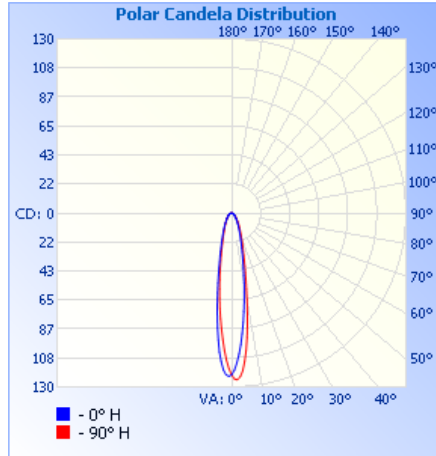


Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	6.54 fc	1.4 ft	1.4 ft
8.7ft	1.60 fc	2.8 ft	2.9 ft
13.0ft	0.72 fc	4.2 ft	4.3 ft
17.3ft	0.40 fc	5.6 ft	5.7 ft
21.7ft	0.26 fc	7.1 ft	7.2 ft
26.0ft	0.18 fc	8.5 ft	8.6 ft

■ Vert. Spread: 18.5°
■ Horiz. Spread: 18.9°

Full Color

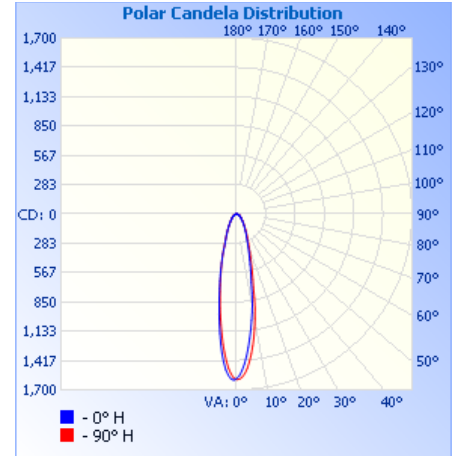


Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	86.0 fc	1.7 ft	1.8 ft
8.7ft	21.0 fc	3.5 ft	3.7 ft
13.0ft	9.41 fc	5.3 ft	5.5 ft
17.3ft	5.31 fc	7.0 ft	7.3 ft
21.7ft	3.38 fc	8.8 ft	9.1 ft
26.0ft	2.35 fc	10.6 ft	10.9 ft

■ Vert. Spread: 22.9°
■ Horiz. Spread: 23.8°

Green

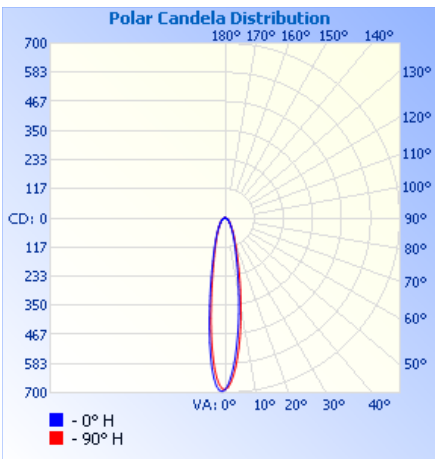


Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	37.2 fc	1.5 ft	1.5 ft
8.7ft	9.10 fc	3.0 ft	3.0 ft
13.0ft	4.07 fc	4.4 ft	4.5 ft
17.3ft	2.30 fc	5.9 ft	6.0 ft
21.7ft	1.46 fc	7.4 ft	7.6 ft
26.0ft	1.02 fc	8.9 ft	9.1 ft

■ Vert. Spread: 19.4°
■ Horiz. Spread: 19.8°

Red

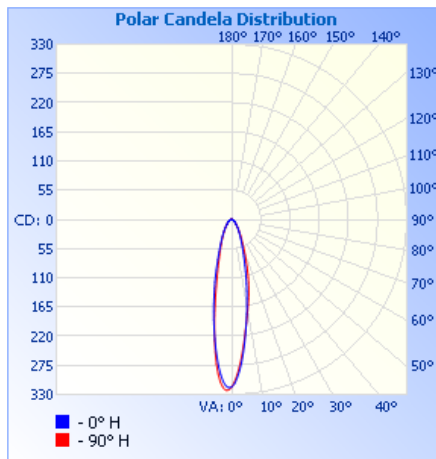

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	17.1 fc	1.7 ft	1.7 ft
8.7ft	4.17 fc	3.4 ft	3.5 ft
13.0ft	1.87 fc	5.1 ft	5.2 ft
17.3ft	1.06 fc	6.8 ft	6.9 ft
21.7ft	0.67 fc	8.5 ft	8.6 ft
26.0ft	0.47 fc	10.2 ft	10.4 ft

■ Vert. Spread: 22.1°
■ Horiz. Spread: 22.5°



**NFWW
121**

**RGBW DUAL
BEND FLEX
WALL WASHER**

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> NFWW	<input checked="" type="checkbox"/> RGBW	<input checked="" type="checkbox"/> 25W/M	<input checked="" type="checkbox"/> 25°	<input checked="" type="checkbox"/> 24V

SES-NFWW121-RGBW-25
Example Model Number

SES – NFWW – RGBW – 25W/M – 25° – 24V

Quantity	Fixture	CCT	Watts	Beam Angle	Voltage
-----------------	----------------	------------	--------------	-------------------	----------------

Common Stock Models:

Item #	Model #
11266	SES-NFWW121-RGBW-25

Optional Accessories:

Item #	Model #	QTY
41265-L	SES-NFWW121-BRACKET	
41266-A	SES-NFWW121-MALE	
41266-B	SES-NFWW121-FEMALE	
41266-C	SES-NFWW121-YCABLE	
41266-D	SES-NFWW121-ANGLEBRACKET	
41266-E	SES-NFWW121-CHANNEL-1M	

DIMENSIONS:

