DL4 AND DL6 | CCT ADJUSTABLE DOWNLIGHT

Project:_____ Type:_____

Name:_____ Date:_____









	Size	Watts	Lumens
11436	4"	10W	750lm
11437	6"	15W	1,200lm

Size	4": 5.1" x 5.1" x 2.3" 6": 7.4" x 7.4" x 2.4"	**CCT**	2700K + 3000K + 3500 4000K + 5000K
Voltage	AC120V (50/60Hz)	**IP Rating**	IP24
Dimming	TRIAC	**Materials**	Aluminum, PC
Beam Angle	100°	**Finish**	White
CRI	≥90	**Lens**	Frosted
PF	≥ 0.7	**Lifespan**	50,000 Hours

SARIN LED Adjustable CCT Downlights are commonly used in spaces with high ceilings like hotels, living spaces, schools, and offices. These ceiling lights are safe for indoor use.

Extremely easy to install, this powerful recessed Downlight is equipped with a quick-connect case, E26 retrofit plug, and conduit to integrate with an existing fixture frame junction box.

This light is dimmable to 10%. Get comfortable, diffused light with no flickering.

OVERVIEW

Tunable: Adjustable CCT

Applications: Indoor IP24

Efficacy: 75lm/W, 80lm/W

Dimming: TRIAC

LED Type: SMD2835

Operating Temp: -4°F to 104°F

Lifespan: 50,000 hours

Warranty: 5 years

Quantity: 40 units/Case
2 units/Box

FEATURES


- Flicker Free
- LED Adjustable CCT Downlights are safe for indoor locations such as living rooms, dining rooms, bedrooms, etc.
- CRI of 90 renders light temperature consistently in various environments, giving colors true clarity
- These lights are intended only for indoor use
- LED Adjustable CCT Downlights are perfect for homes, schools, offices and hotels
- Noiseless
- Extra long lifetime
- Instant-on lighting


DL4 AND DL6 | CCT ADJUSTABLE DOWNLIGHT

Project:_____ Type:_____


Name:_____ Date:_____


DIMENSIONS:

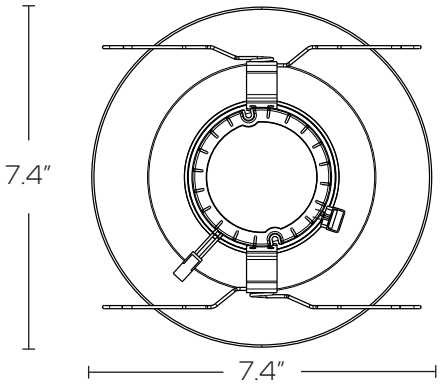

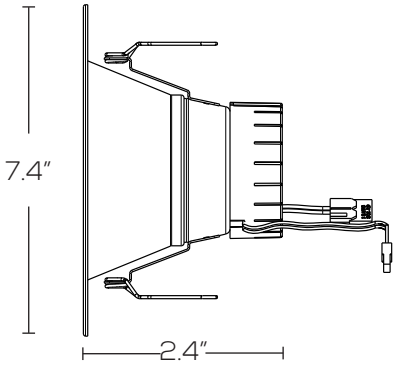

PHOTOMETRICS:

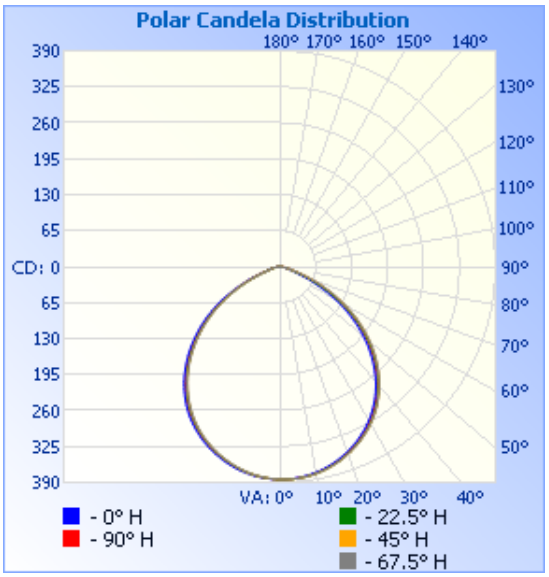

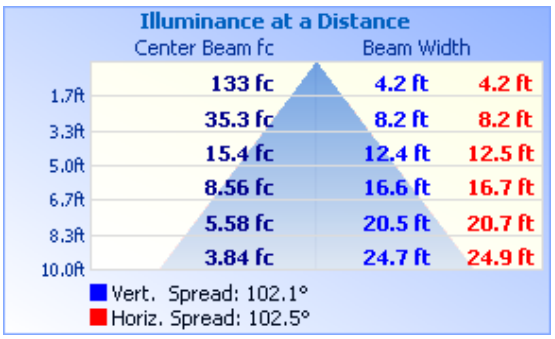

WARNING:

1. Risk of fire or electric shock. LED Adjustable CCT Downlight installation requires knowledge of lighting electrical systems. If not qualified contact a certified electrician for installation.
2. Install this kit only in luminaires that have the construction features and dimensions shown in the drawings and where the input rating of the retrofit kit does not exceed the voltage rating of the luminaire.
3. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
4. To prevent damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
5. This luminaire has been built to operate LED lamps. Do not attempt to install fluorescent lamps in this light.

DL4 AND DL6 | CCT ADJUSTABLE DOWNLIGHT


Project:_____ Type:_____

Name:_____ Date:_____


INSTALLATION:

1. Remove the existing lamps and trim.
2. Screw E26 Connector plug into the existing socket.
3. Select desired color temperature on top of the fixture.
4. Connect the terminals from E26 socket to fixture.
5. Press spring clips together, push fixture up into existing recessed hole/cylinder and release once in, then continue until it's flash with ceiling.




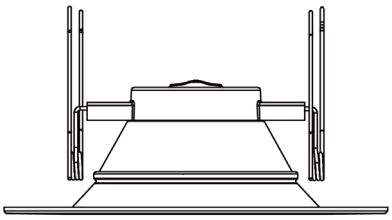

Step 1




Step 2




REMOVAL:

- With your fingertips, pull down firmly on the trim ring until fixture stops.
- Squeeze torsion springs together to remove LED fixture.
- Disconnect Fixture from socket adapter.
- Unscrew socket adapter (E26) from recessed hole/cylinder.


Step 3

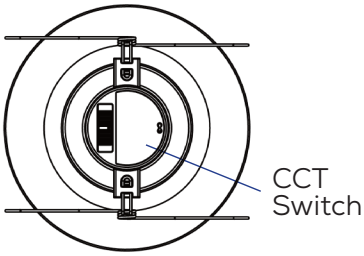

Step 4




CCT SELECTOR SWITCH:



The CCT tunable selector switch located on top of the fixture allows the user to choose between 2700K, 3000K, 3500K, 4000K and 5000K.

Step 5



 ©2026

SARIN

DL4 AND DL6 | CCT ADJUSTABLE DOWNLIGHT

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
	☑ DL4	☑ Tunable	☑ 10W	☑ 100°	☑ AC 120V
SES-DL6-CCT-15 (Example Model Number)	☑ DL6		☑ 15W		

Quantity	SES	–	DL6	–	Tunable	–	15	–	100	–	AC120
			Fixture		CCT		Watts		Beam Angle		Voltage

Common Stock Models:

Item #	Model #
11436	SES-DL4-CCT-10
11437	SES-DL6-CCT-15

©2026