

LA02C CCT LINEAR STRIP LIGHT

Ρ	roi	ρ	C	т	•
	. 01	~	~	•	·

Name:

Type:_

Date:_



OVERVIEW

Tunable: 3000K-5000K Applications: Damp (IP4X) Efficacy: 125-135Im/W Dimming: 0-10V dimming LED Type: Lumileds 2835 Lens Type: Clear Driver: 40W: LH-040LA-S90SVPC 70W: LH-070LA-S135SVPC Operating Temp: -22°to 113° F without motion sensor & emergency back up; -4 to 113° F with motion sensor and emergency back up; 32° to 113° F with motion sensor Operating Humidity: 20%-90%RH Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Includes wiring box cover & screws
- Optional Accessories: DC Motion Sensor, Emergency Power Supply
- Mounting Options: Ceiling mount, pendant mount, cable mount, chain mount

Size	40W 2.4×2.7×48 70W 2.4×2.7×96	Lumens	40W 4,800-5,500lm 70W 8,700-9,500lm
Watts	20W/30W/40W 50W/60W/70W	сст	3000K-3500K- 4000K- 5000K
Voltage	120-277VAC	IP Rating	Damp (IP4X)
Dimming	0-10V	Materials	Iron
Beam Angle	130°	Finish	White
CRI	>80	Lens	Clear
PF	≥ 0.9	Lifespan	50,000 Hours

SARIN LED Adjustable CCT Linear Strips are commonly used to replace fluorescent lights in work areas. In addition to tunable color temperatures, the two larger models also allow you to switch between three wattage settings.

Not only can these be surface mounted but they also look great when suspended. LED Wraparounds are perfect for offices, garages, auto body shops, and car dealerships.







Project:

Type:_

N a m e :____

Date:_


PHOTOMETRICS:

X° Beam Angle: (Polar Candela Dist.) **Polar Candela Distribution** 180° 170° 160° 150° 140° 740 617 130° 493 120° 370 110° 247 100° 123 CD: 0 90° 123 80° 247 70° 370 60° 493 617 50° 740 10° 20° 30° - 22.5° H VA: 0° 40° - 0° H - 45° H
- 67.5° H - 90° H

Light Distance: (Illuminance at a Distance)

Illuminance at a Distance					
	Center Beam fc	Beam Wid	th		
2.5ft	117 fc	6.4 ft	11.4 ft		
5.0ft	29.2 fc	12.7 ft	22.9 ft		
7.5ft	13.0 fc	19.1 ft	34.3 ft		
10.0 R	7.31 fc	25.5 ft	45.7 ft		
12.5 R	4.68 fc	31.8 ft	57.1 ft		
15.0 R	3.25 fc	38.2 ft	68.6 ft		
Vert. Spread: 103.7°					
Horiz. Spread: 132.7°					

DIMENSIONS:

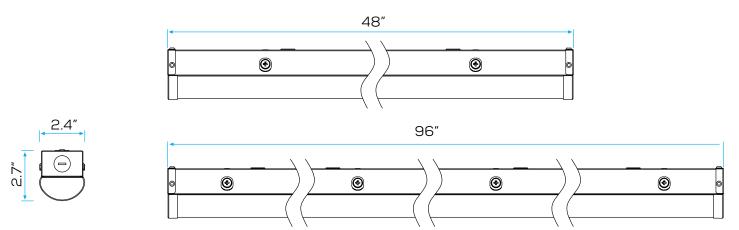



CCT LINEAR
STRIP LIGHT

ORDER FORM:

			(*) Special Order/Not Co	ommonly Stocked
Custom Model Assembly				
	Fixture	сст 🗹 Tunable	Watts 20W / 30W / 40W	Voltage 120-277V
SES-LA02C-CCT-LW Example Model Number			☐ 50W / 60W / 70W	

	SES - LAO2C - Tunable -			-120-277V
Quantity	Fixture	ССТ	Watts	Voltage

Common Stock Models:

ltem #	Model #
11371	SES-LA02C-CCT-LW
11372	SES-LA02C-CCT-HW

Optional Accessories:

Item #	Model #	QTY
13044	SES-LA01C-CHAIN	
13046	SES-LA02C-SURFACE	
13047	SES-LA02C-SUSPENDED	
11373	BLD-CM20H-1500400 (Emergency Driver)	







13047



11373

13044

13046

🔌 SARIN