



LWSIM | LINEAR WALL WASHER

Project: _____ Type: _____

Name: _____ Date: _____



Size	39.4" L x 2" W x 5.1" H	Lumens	3,600lm
Watts	36W	CCT	3000K, 5000K
Voltage	100-277V	IP Rating	IP65
Dimming	No	Materials	Aluminum
Beam Angle	45°	Finish	Black
CRI	80	Lens	Clear
PF	0.9	Lifespan	30,000 Hours

OVERVIEW

Tunable: 3000K, 5000K

Applications: IP65

Efficacy: 100lm/W

Dimming: No

LED Type: CREE

Operating Temp: -40° to 113° F

Operating Humidity: 10%-65% RH

Lifespan: 30,000 Hours

Warranty: 3 Years

FEATURES

- Control light with a remote control or our P2 flood light programming system
- Easy to install and set up with an adjustable angle bracket



SARIN LED Linear Wall Washers offer bright and uniform lighting to any building with long-lasting LEDs. They produce high refresh rates for smooth transitional experiences, and include a built-in driver with overheat protection. These lights add eye-catching highlights to the exteriors of a structure.


The housing is made of sleek, quality aluminum with optical covers that provide UV and weather resistances, ensuring that all units are safe outdoors.





PHOTOMETRICS:

36W

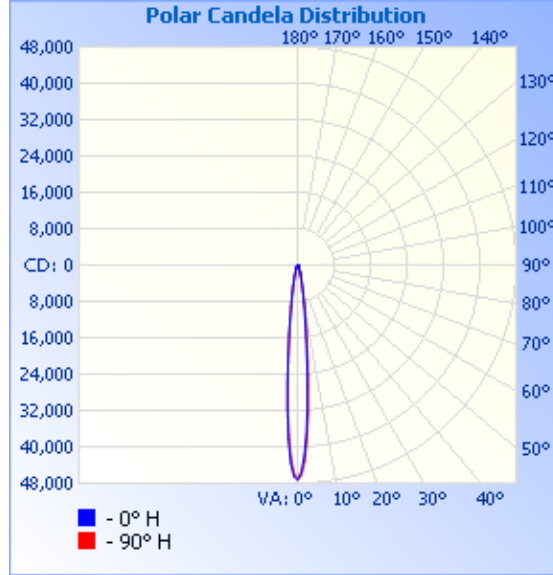

Illuminance at a Distance

	Center Beam fc	Beam Width	
5.0ft	1,888 fc	0.9 ft	1.0 ft
10.0ft	472 fc	1.9 ft	1.9 ft
15.0ft	210 fc	2.8 ft	2.9 ft
20.0ft	118 fc	3.7 ft	3.9 ft
25.0ft	75.5 fc	4.6 ft	4.8 ft
30.0ft	52.4 fc	5.6 ft	5.8 ft

■ Vert. Spread: 10.6°
■ Horiz. Spread: 11.0°

DIMENSIONS:

39.4"

