
Project:	Туре:

Date:\_







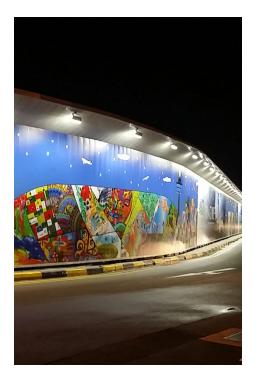

Size	See Dimensions		
Watts	30W, 50W		
Voltage	120-277V		
Dimming	0-10V		
Beam Angle	150°		
CRI	>80		
PF	≥ 0.9		

Lumens	3,870 - 7,150lm		
ССТ	3000K-4000K-5000K		
IP Rating	IP65		
Materials	Die-cast Aluminum		
Finish	Bronze		
Lens	Clear		
Lifespan	50,000 Hours		

SARIN LED OUTDOOR FLOOD LIGHTS accentuate your building's exterior by adding an overlay of gorgeous lights. These eye-catching LEDs are bound to bring attention with their brightness, which is perfect for high walls and tall objects, adding a new level of flair to homes and businesses, as well as security.

SARIN LED OUTDOOR FLOOD LIGHTS have multiple options to choose from to fit your specific needs. They come in 30W or 50W models are CCT tunable. These long-lasting lights come with either adjustable yoke or knuckle mount options, giving a multitude of application possibilities. They are rated for outdoor use and feature high-quality, weather-proof powder-coating with an aluminum body that disperses heat efficiently.

#### **OVERVIEW**

**Tunable:** 3000K-4000K-5000K

**Applications: IP65 Efficacy:** 125-145lm/W

Dimming: 0-10V

**LED Type:** Lumileds 2835

Lens Type: Clear

Driver: HB-FL19F035 & HB-FL19F060

Operating Temp: -22°F to 113°F Operating Humidity: 20% - 90% RH

**Lifespan:** 50,000 Hours Warranty: 5 Years

### **FEATURES**

- CCT tunable with 0-10V dimming options available
- Powder-coated for longevity, built to withstand the elements
- Aluminum body disperses heat better than its counterparts and maximizes LED efficiency












Project:	Type:

N a m e :\_\_ Date:\_


# **PHOTOMETRICS:**

30W






### **50W**




	Illuminance at a Distance				
		Center Beam fc	Beam Width		
2.5	58	344 fc	6.8 ft	7.5 ft	
5.0		85.9 fc	13.6 ft	15.1 ft	
7.5		38.2 fc	20.3 ft	22.6 ft	
10.0		21.5 fc	27.1 ft	30.2 ft	
		13.7 fc	33.9 ft	37.7 ft	
12.5		9.54 fc	40.7 ft	45.2 ft	
15.0		Vert. Spread: 107.2°		TOTAL TO	
		Horiz, Spread: 112.9°			

# **DIMENSIONS:**

Large Yoke Mount

















Project:	Туре:
Name:	Date:

#### ODDED FODM.

OKDEK I OKI I.			(*) Speci	al Order/Not Com	nmonly Stocked
Custom Model Assembly					
SES-FL06E-CCT-30W	<b>Fixture</b> ✓ FL06E	<b>CCT</b> ✓ Tunable	<b>Watts</b> □ 30W □ 50W	Beam Angle  150°	<b>Voltage</b> <b>1</b> 20-277∨
Example Model Number	_ ELOSE	— Tunable	_	– 150°	-120-277V
Quantity	Fixture	CCT	Watts	Beam Angle	Voltage

### **Common Stock Models:**

Item #	Model #
11340	SES-FL06E-CCT-30W-AM
11341	SES-FL06E-CCT-50W-AM







