




PG

LED Parking Garage Light

Project: _____ Type: _____

Name: _____ Date: _____

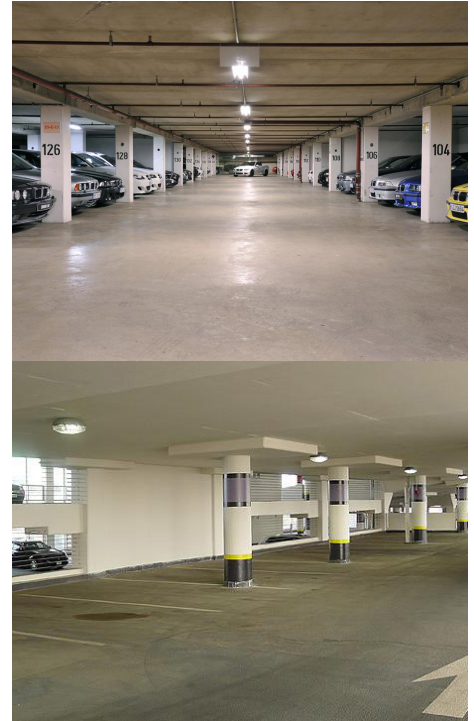

| | | | |
|-------------------|--|------------------|-------------------------------|
| Size | 55W: 10" L x 10" W x 3" H 75W: 11" L x 11" W x 3" H | Lumens | 55W: 7,331lm 75W: 10,103lm |
| Watts | 55W, 75W | CCT | 3000K/4000K/5000K |
| Voltage | 120-277V | IP Rating | IP65 |
| Dimming | 0-10V Dimming | Materials | Aluminum |
| Beam Angle | 150° | Finish | White, Bronze |
| CRI | >80 | Lens | Stripe |
| PF | 0.9 | Lifespan | 50,000 Hours |

OVERVIEW

- Applications:** Outdoor IP65
- Efficacy:** 135-142lm/w
- Dimming:** 0-10V dimming
- LED Type:** L128-XX80RA35000H1
L128-XX80RA35003HX
- Lens Type:** Clear
- Driver Type:** 55W: HB-LPG060-52
75W: MP-080T130A
- Operating Temp:** -22°F to 122°F
- Operating Humidity:** 20-90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

FEATURES

- IP65 rating, ideal for outdoor application with protection from the elements
- High lumen output and 3000K, 4000K, 5000K color temperatures
- Extremely high efficacy of up to 142 lumens per watt, which saves on electricity usage

SARIN LED PARKING GARAGE LIGHTS offer the best in class for parking garage safety and lighting. These lights illuminate dark areas like no other and provide safety by deterring criminal activity, keeping patrons moving along with confidence.

These garage lights are high efficiency and light up areas effortlessly with its high lumens paired with selectable 3000K, 4000K, and 5000K color temperatures. These lights are designed for parking garages and for outdoor use; safe when exposed to rain and moisture.

The LEDs in this unit are guaranteed to last up to 50,000 hours and are backed by a 5 year warranty. They can be surface or pendant mounted.





PG

LED Parking Garage Light



Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

55W:

75W:

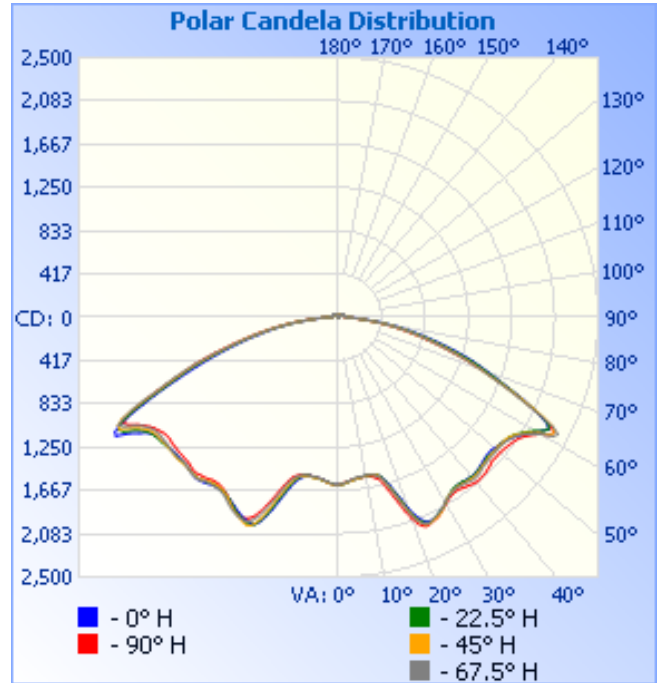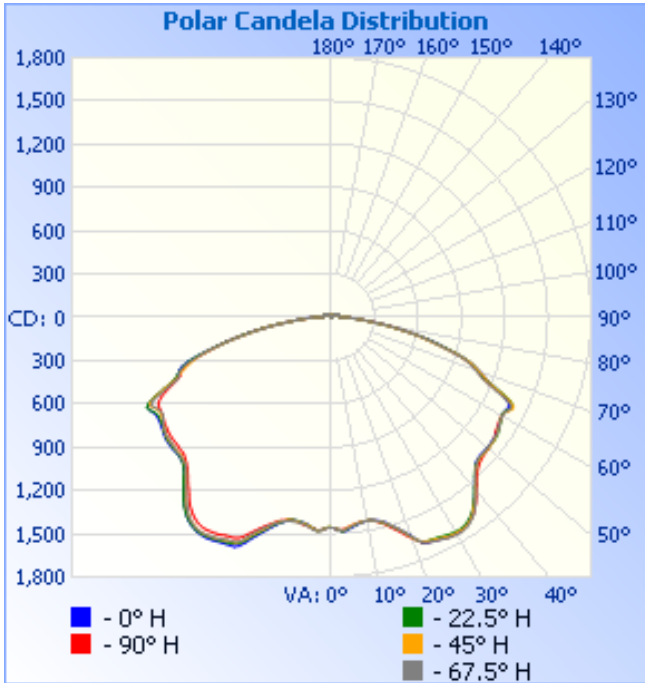

Illuminance at a Distance

| | Center Beam fc | Beam Width | |
|--------|----------------|------------|----------|
| 4.3ft | 78.8 fc | 31.4 ft | 26.5 ft |
| 8.7ft | 19.2 fc | 63.5 ft | 53.7 ft |
| 13.0ft | 8.62 fc | 94.9 ft | 80.2 ft |
| 17.3ft | 4.87 fc | 126.2 ft | 106.8 ft |
| 21.7ft | 3.09 fc | 158.3 ft | 133.9 ft |
| 26.0ft | 2.15 fc | 189.7 ft | 160.5 ft |



■ Vert. Spread: 149.3°
■ Horiz. Spread: 144.1°

Illuminance at a Distance

| | Center Beam fc | Beam Width | |
|--------|----------------|------------|---------|
| 4.3ft | 87.3 fc | 28.9 ft | 10.8 ft |
| 8.7ft | 21.3 fc | 58.4 ft | 22.0 ft |
| 13.0ft | 9.55 fc | 87.3 ft | 32.8 ft |
| 17.3ft | 5.39 fc | 116.1 ft | 43.6 ft |
| 21.7ft | 3.43 fc | 145.7 ft | 54.8 ft |
| 26.0ft | 2.39 fc | 174.5 ft | 65.6 ft |

■ Vert. Spread: 146.8°
■ Horiz. Spread: 103.2°

DIMENSIONS:

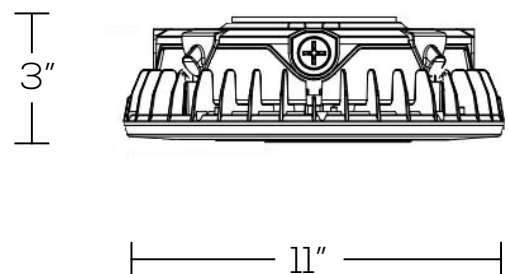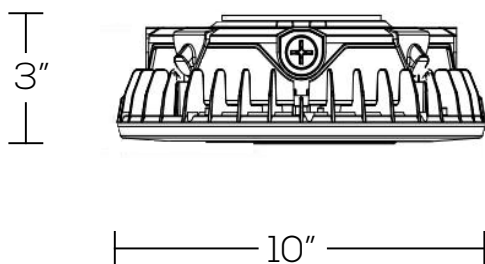



PG

LED Parking Garage Light

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(* Special Order/Not Commonly Stocked)

Custom Model Assembly

| | Fixture | Watts | CCT | Finish | Voltage |
|--|------------------------------|---|---------------------------------|--|---------|
| <input checked="" type="checkbox"/> PG | <input type="checkbox"/> 55W | <input checked="" type="checkbox"/> 3000K | <input type="checkbox"/> White | <input checked="" type="checkbox"/> 120-277V | |
| | <input type="checkbox"/> 75W | <input checked="" type="checkbox"/> 4000K | <input type="checkbox"/> Bronze | | |
| | | <input checked="" type="checkbox"/> 5000K | | | |

| | | | | | | | | | |
|-----------------|------------|---|----------------|---|---|------------|---|---|----------------|
| _____ | SES | — | PG | — | — | CCT | — | — | 120-277 |
| Quantity | | | Fixture | | | CCT | | | Voltage |

SES-PG-75-CCT-D
Example Model Number

Common Stock Models:

| Item # | Model # |
|--------|-------------------|
| 10825 | SES-PG-55W-CCT-BR |
| 10826 | SES-PG-55W-CCT |