



# WPRO1 | ROTATABLE LED WALL PACK

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



<b>Size</b>	See Dimensions	<b>Lumens</b>	11176: 3,250-3,500lm 11174: 5,200-5,600lm 11175: 10,400-11,200lm
<b>Watts</b>	25W, 40W, 80W	<b>CCT</b>	5700K
<b>Voltage</b>	120-277V	<b>IP Rating</b>	IP65
<b>Dimming</b>	0-10V	<b>Materials</b>	Aluminum
<b>Beam Angle</b>	60°	<b>Finish</b>	Bronze
<b>CRI</b>	>70	<b>Lens</b>	Clear
<b>PF</b>	≥0.9	<b>Lifespan</b>	50,000 Hours

## OVERVIEW

- Tunable:** 5700K
- Applications:** IP65
- Efficacy:** 130-140lm/W
- Dimming:** 0-10V
- LED Type:** SMD 3030
- Driver:** See Last Page
- Operating Temp:** -22° to 113F°
- Operating Humidity:** 10%-90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

## FEATURES

- Available in 4 different wattages: 25W, 40W, 80W
- Protected from the elements with an IP65 rating, making it suitable for rainy environments

SARIN ROTATABLE LED MINI WALL PACKS adopts the latest technology, replacing traditional bulbs with energy efficient LEDs. These are widely used in the lighting of homes, hotels, offices, hallways, garages, streets, landscapes and other commercial spaces and includes an emergency backup.

These fixtures are suitable for a variety of applications and will provide significant energy savings. Choose from four energy-saving wattages—25W, 40W, and 80W—and a bright 5700K color temperature.






# WPRO1 | ROTATABLE LED WALL PACK

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

### 25W

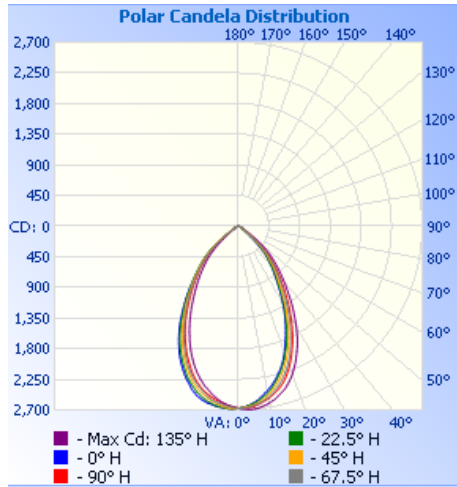


**Illuminance at a Distance**

	Center Beam fc	Beam Width	
2.5ft	428 fc	3.2 ft	3.2 ft
5.0ft	107 fc	6.3 ft	6.5 ft
7.5ft	47.5 fc	9.5 ft	9.7 ft
10.0ft	26.7 fc	12.7 ft	13.0 ft
12.5ft	17.1 fc	15.8 ft	16.2 ft
15.0ft	11.9 fc	19.0 ft	19.4 ft

■ Vert. Spread: 64.7°  
■ Horiz. Spread: 65.9°

### 40W

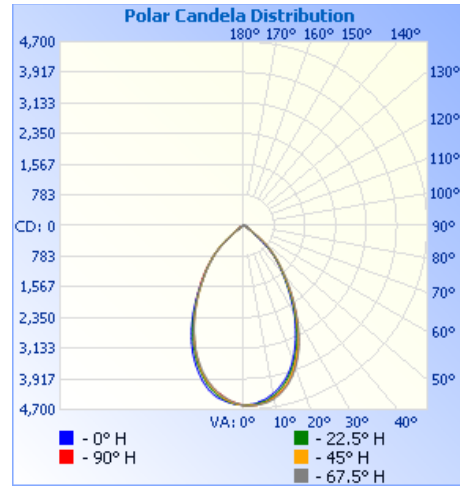


**Illuminance at a Distance**

	Center Beam fc	Beam Width	
2.5ft	734 fc	3.2 ft	3.2 ft
5.0ft	183 fc	6.3 ft	6.4 ft
7.5ft	81.5 fc	9.5 ft	9.6 ft
10.0ft	45.8 fc	12.7 ft	12.8 ft
12.5ft	29.3 fc	15.9 ft	16.0 ft
15.0ft	20.4 fc	19.0 ft	19.2 ft

■ Vert. Spread: 64.8°  
■ Horiz. Spread: 65.3°

### 80W

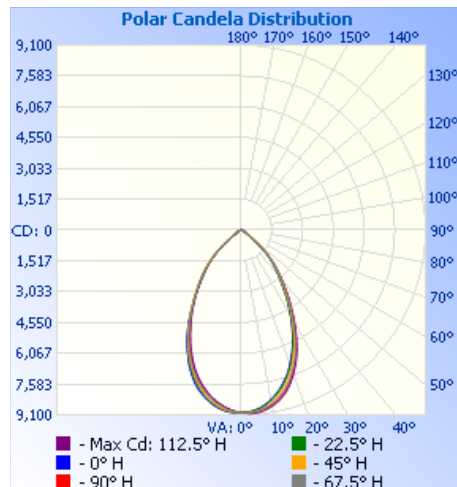

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
2.5ft	1,438 fc	3.1 ft	3.2 ft
5.0ft	359 fc	6.3 ft	6.4 ft
7.5ft	160 fc	9.4 ft	9.6 ft
10.0ft	89.9 fc	12.5 ft	12.8 ft
12.5ft	57.5 fc	15.7 ft	16.0 ft
15.0ft	39.9 fc	18.8 ft	19.2 ft

■ Vert. Spread: 64.2°  
■ Horiz. Spread: 65.1°





# WPR01 | ROTATABLE LED WALL PACK

Project: \_\_\_\_\_ Type: \_\_\_\_\_



Name: \_\_\_\_\_ Date: \_\_\_\_\_

## DIMENSIONS:

### 25W, 40W

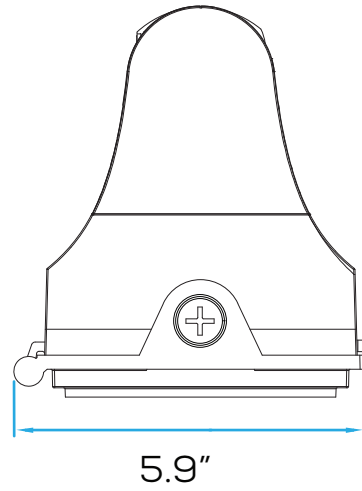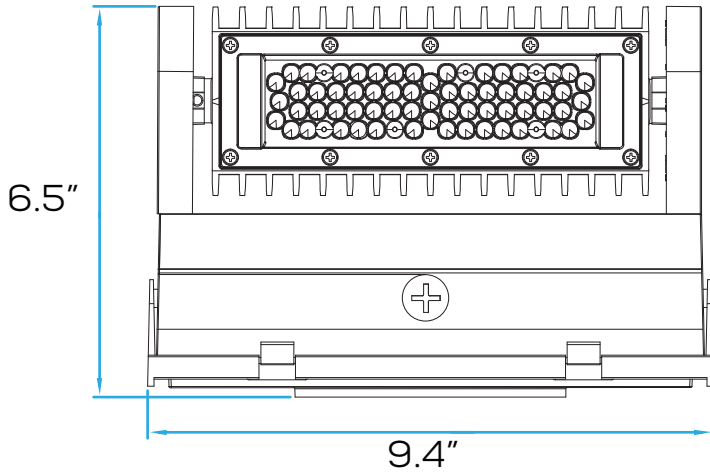

### 80W

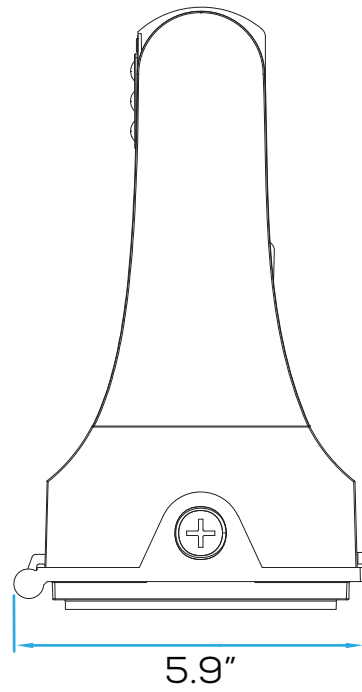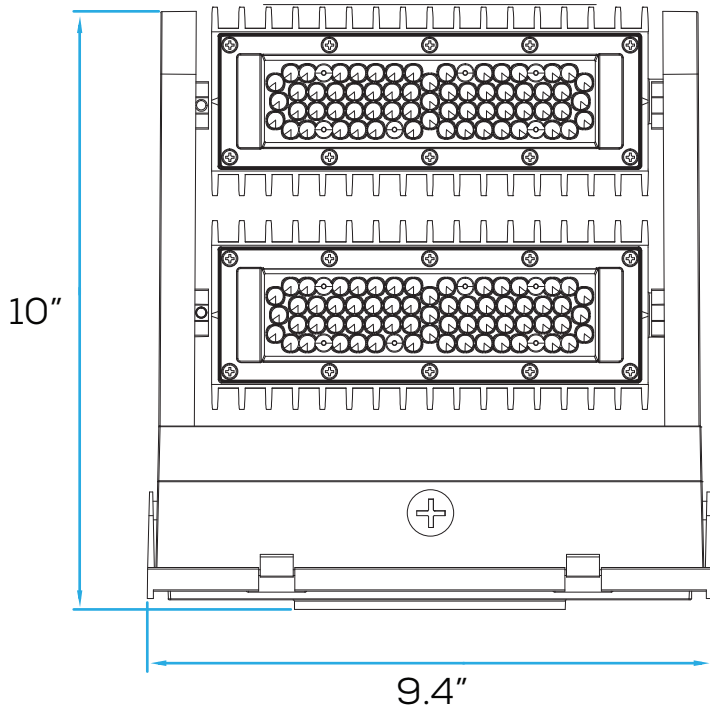



# WPR01 | ROTATABLE LED WALL PACK

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

	<b>Fixture</b>	<b>CCT</b>	<b>Watts</b>	<b>Beam Angle</b>	<b>Voltage</b>
	<input checked="" type="checkbox"/> WPR01	<input checked="" type="checkbox"/> 5700K	<input type="checkbox"/> 25W	<input checked="" type="checkbox"/> 60°	<input checked="" type="checkbox"/> 120-277V
			<input type="checkbox"/> 40W		
			<input type="checkbox"/> 60W*		
			<input type="checkbox"/> 80W		

SES-WPR01-5700-40  
Example Model Number

**SES – WPR01 – 5700K – 60° – 120-277V**

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

## Common Stock Models:

Item #	Model #	Driver
11174	SES-WPR01-5700-40	HB-LPG040-52
11175	SES-WPR01-5700-80	WP-HHA-075U0441700
11176	SES-WPR01-5700-25	HB-LPG030-52