




WL2534

LED CCT WALL SCONCE

Project: _____ Type: _____

Name: _____ Date: _____

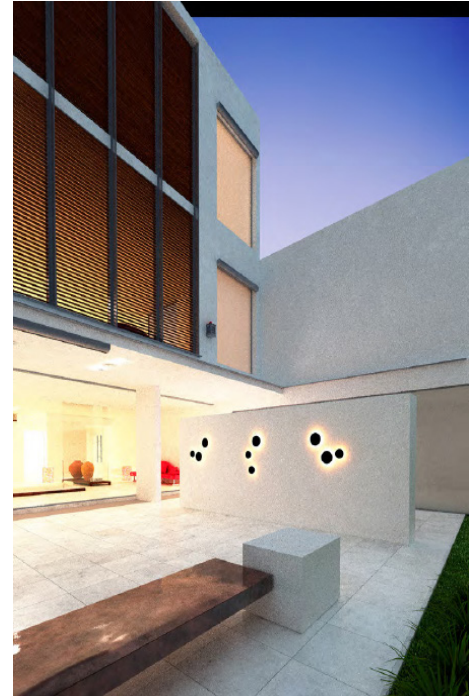

Size	4.7" L x 5.1" W x 5.3" D	Lumens	300lm (2534S) 430lm (2534L)
Watts	7W (2534S) 10W (2534L)	CCT Tunable	3000K-4000K-5000K
Voltage	100-240V	IP Rating	IP54
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	139.6° (2534L)	Finish	Light Gray
CRI	>80	Lens	Clear
PF	≥ 0.5	Lifespan	30,000 Hours

OVERVIEW

CCT Tunable: 3000K-4000K-5000K

Applications: IP54

Efficacy: 43lm/W

Dimming: Non-Dimming

LED Type: SMD2835

Lens Type: Clear

Driver: SD-PNW006301A

Operating Temp: -4° to 104° F

Operating Humidity: 10%-65% RH

Lifespan: 30,000 Hours

Warranty: 3 Years

FEATURES

- Protected from the elements with an IP54 rating making it suitable for wet conditions
- Durable aluminum housing protects from wear and tear






WL2534

LED CCT WALL
SCNCE

Project: _____ Type: _____

Name: _____ Date: _____


PHOTOMETRICS:

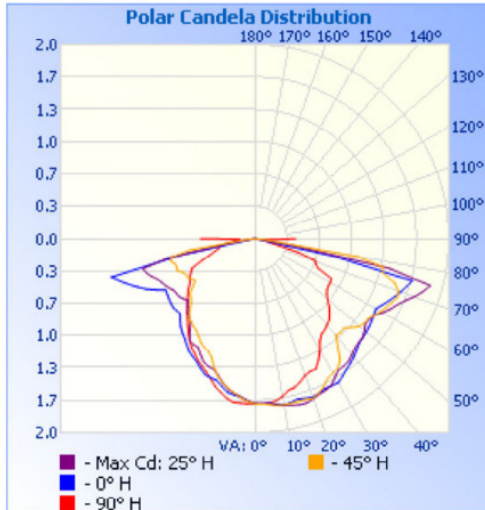

	Illuminance at a Distance	
	Center Beam fc	Beam Width
2.5ft	0.27 fc	7.9 ft 6.4 ft
5.0ft	0.07 fc	15.8 ft 12.7 ft
7.5ft	0.03 fc	23.6 ft 19.1 ft
10.0ft	0.02 fc	31.5 ft 25.5 ft
12.5ft	0.01 fc	39.4 ft 31.8 ft
15.0ft	0.01 fc	47.3 ft 38.2 ft

■ Vert. Spread: 115.2°
■ Horiz. Spread: 103.7°

DIMENSIONS:

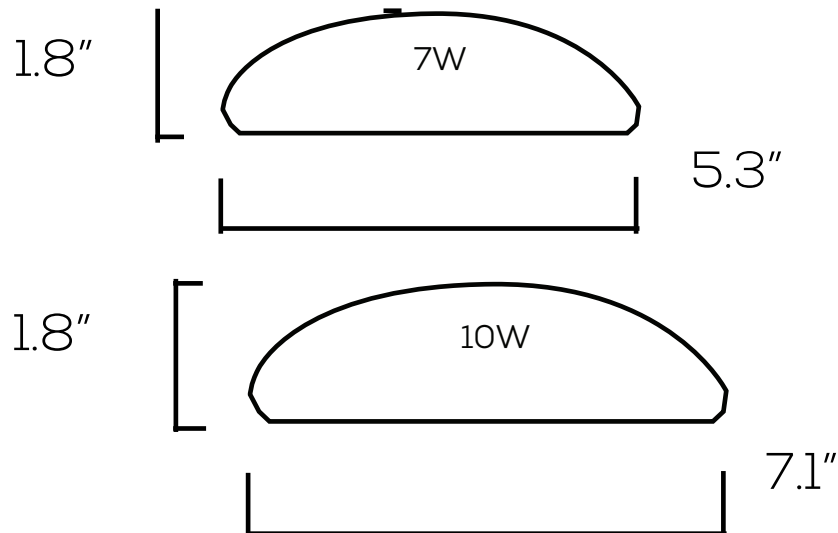



WL2534

LED CCT WALL
SCNCE

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> WL2534S	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 7W	<input checked="" type="checkbox"/> 139.6°	<input checked="" type="checkbox"/> 100-240V	
<input checked="" type="checkbox"/> WL2534L		<input checked="" type="checkbox"/> 10W			

SES-WL2534S-CCT-7W
Example Model Number

	SES	—	Tunable	—	100-240V
Quantity	Fixture	CCT	Watts	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11155	SES-WL2534S-7-CCT
11154	SES-WL2534L-10-CCT