



SDL

LED RGB Slim Downlight With J-Box

Project: _____ Type: _____

Name: _____ Date: _____



Control CCT wirelessly



OVERVIEW

- Tunable:** RGBWW
- Applications:** Indoor IP44
- Efficacy:** 70-72lm/W
- Dimming:** App
- LED Type:** SMD 5050
- Lens Type:** Clear
- Operating Temp:** -4F° to 104F°
- Operating Humidity:** 10-65% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

FEATURES

- Safe in damp locations where water and humidity may come into contact
- Multi-Color LED Controlled through Smart Phone via App
- Recessed mount for flush and clean installation
- Reduce energy costs and maintenance intervals.

ACCESSORIES

- Junction Box (J-Box) included
- Spring Action Clips fit securely into corresponding openings

OPTIONAL ACCESSORIES

- Bronze Trim
- Black Trim
- Brushed Nickel Trim

Size	SDL4: 4.8" x 4.8" x 1" SDL6: 6.9" x 6.9" x 1"
Watts	SDL4: 9W SDL6: 12W
Voltage	AC120V
Dimming	App
Beam Angle	110°
CRI	80
PF	0.9

Lumens	SDL4: 650lm SDL6: 850lm
CCT	RGBWW
IP Rating	IP44
Materials	Aluminum, PMMA
Finish	White
Lens	Clear
Lifespan	50,000 Hours

SARIN LED SLIM RGB DOWNLIGHTS are a colorful addition to any room. The design removes the need for recessed cans, freeing up space for installation and hard-to-reach locations. The spring action clips and junction box eliminate the need for housing, making for easier installations.

These downlights are meant for indoor use but can be installed in damp locations such as kitchens and bathrooms where humidity and splashes of water are common. Access to space above the ceiling is required for installation. NOTE: App control requires 2.5GHz channel.






SDL

**LED RGB
Slim Downlight
With J-Box**

Project: _____ Type: _____

Name: _____ Date: _____



DIMENSIONS:

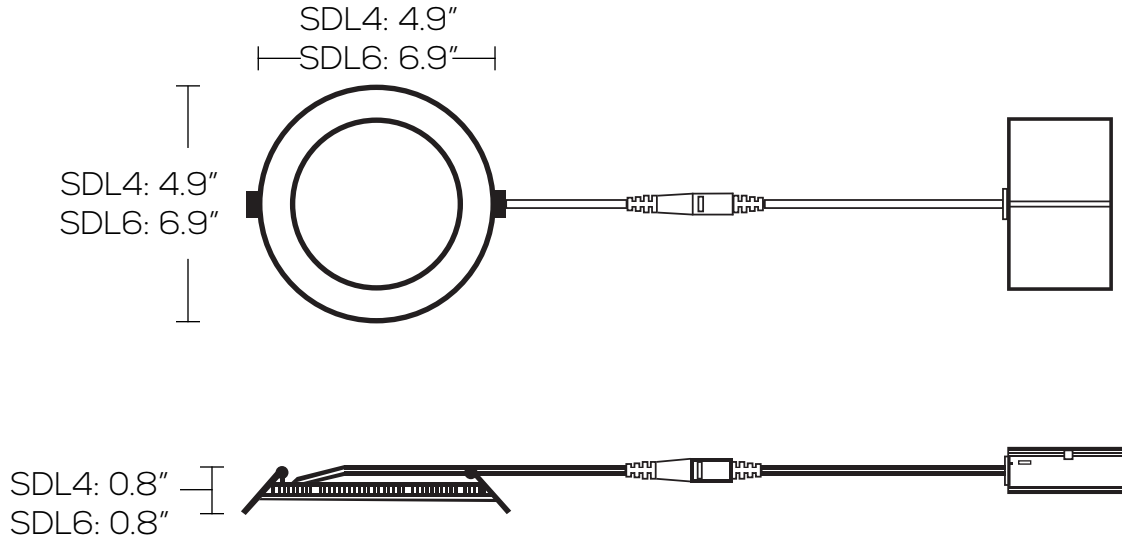

PHOTOMETRICS:

9W:

12W:

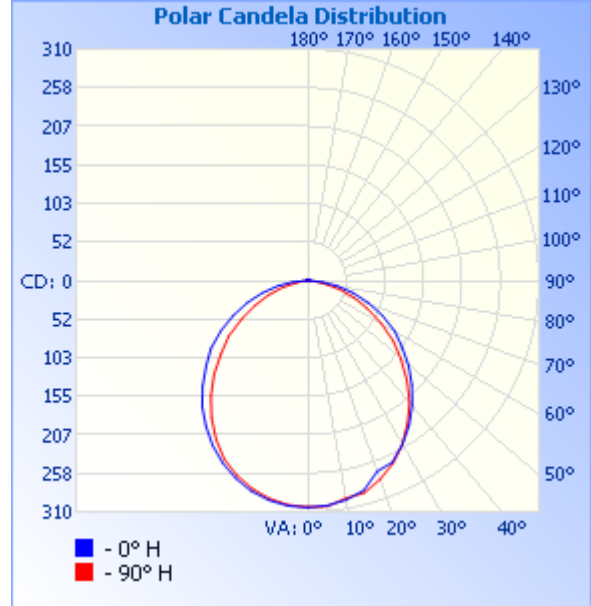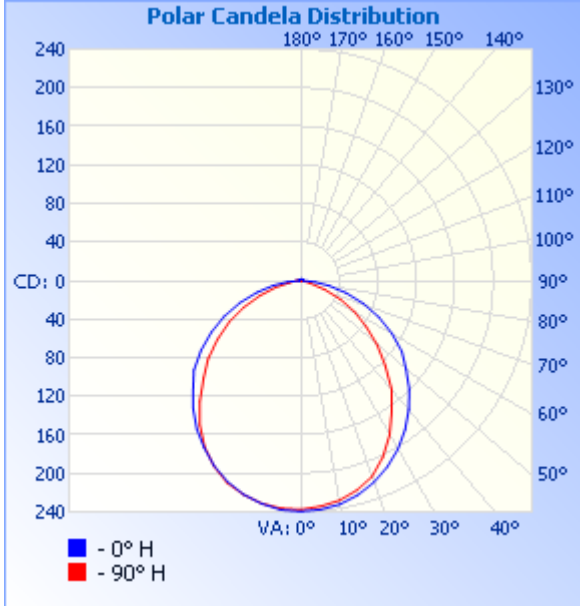

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	82.8 fc	5.2 ft	3.9 ft
3.3ft	22.0 fc	10.2 ft	7.5 ft
5.0ft	9.57 fc	15.4 ft	11.4 ft
6.7ft	5.33 fc	20.6 ft	15.3 ft
8.3ft	3.47 fc	25.5 ft	18.9 ft
10.0ft	2.39 fc	30.8 ft	22.8 ft

■ Vert. Spread: 114.0°
■ Horiz. Spread: 97.4°

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	105 fc	5.0 ft	4.2 ft
3.3ft	27.9 fc	9.8 ft	8.2 ft
5.0ft	12.2 fc	14.8 ft	12.4 ft
6.7ft	6.77 fc	19.8 ft	16.6 ft
8.3ft	4.41 fc	24.5 ft	20.6 ft
10.0ft	3.04 fc	29.6 ft	24.8 ft

■ Vert. Spread: 111.8°
■ Horiz. Spread: 102.2°



SDL

**LED RGB
Slim Downlight
With J-Box**

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

Custom Model Assembly

SES-SDL4-RGBWW-10
Example Model Number

- | | | | |
|----------------------------------|---|------------------------------|---|
| Fixture | CCT | Watts | Trim |
| <input type="checkbox"/> SDL4-02 | <input checked="" type="checkbox"/> RGBWW | <input type="checkbox"/> 9W | <input checked="" type="checkbox"/> White |
| <input type="checkbox"/> SDL6-02 | | <input type="checkbox"/> 12W | <input type="checkbox"/> Bronze |
| | | | <input type="checkbox"/> Black |
| | | | <input type="checkbox"/> Nickel |

SES — —RGBWW—

Quantity	Fixture	CCT	Watts	Trim
----------	---------	-----	-------	------

Common Stock Models:

Item #	Model #
11293	SES-SDL4-02-RGBWW-9
11294	SES-SDL6-02-RGBWW-12

Accessories:

Item #	4"	6"
 Bronze	40192-A	40193-A
 Black	40192-B	40193-B
 Brushed Nickel	40192-C	40193-C