





SP06

DMX CONTROLLED RGBW SPORT LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

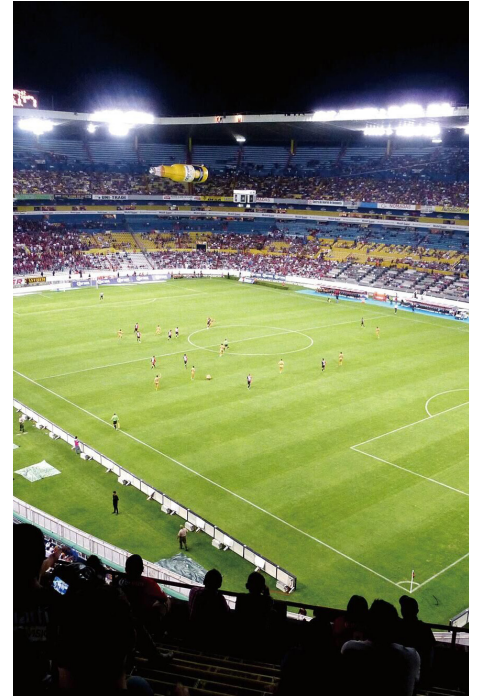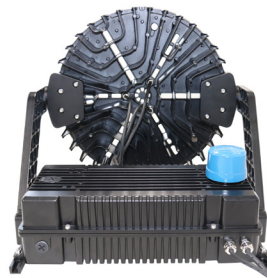

Watts	750W	1200W		
Lumens	105,000lm - 107,250lm	168,000lm - 171,600lm		
Size	See Dimensions		CCT	RGBW
Voltage	120-277V		IP Rating	IP65
Dimming	0-10V		Materials	Die-Cast Aluminum
Beam Angle	30°		Finish	Black (Bronze Optional)
CRI	>70		Lens	Clear
PF	≥ 0.9		Lifespan	50,000 Hours

OVERVIEW

CCT: RGBW

Applications: IP65

Efficacy: 140-143lm/W

Dimming: 0-10V

LED Type: SMD3030

Lens Type: Clear

Driver: BLD-700-C420-ENU,
BLD-600-C420-ENU

Operating Temp: -40F° to 113F°

Operating Humidity: 20% - 90% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- High Focus and Low Glare Lens
- Instant Start, No Flickering, No Humming
- Photocontrol/ Surge Protector





SP06


DMX CONTROLLED RGBW SPORT LIGHT

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:

750W:

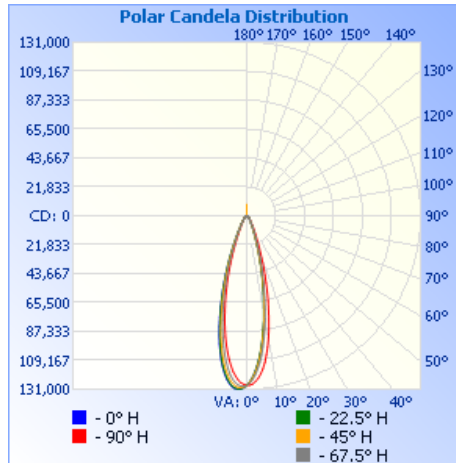

1200W:

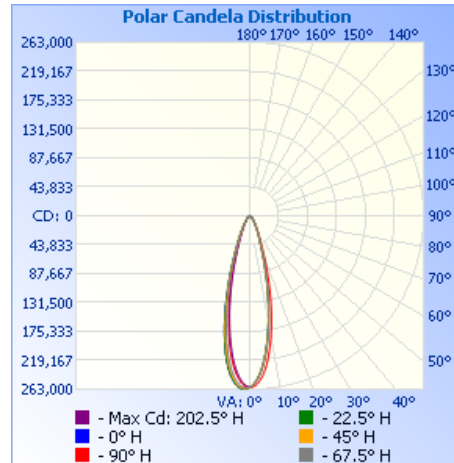

Illuminance at a Distance


	Center Beam fc	Beam Width	
16.7R	458 fc	8.4 ft	8.6 ft
33.3R	115 fc	16.8 ft	17.2 ft
50.0R	51.1 fc	25.2 ft	25.8 ft
66.7R	28.7 fc	33.6 ft	34.4 ft
83.3R	18.4 fc	42.0 ft	43.0 ft
100.0R	12.8 fc	50.4 ft	51.6 ft

■ Vert. Spread: 28.3°
■ Horiz. Spread: 28.9°


Illuminance at a Distance

	Center Beam fc	Beam Width
16.7R	932 fc	8.3 ft
33.3R	234 fc	16.6 ft
50.0R	104 fc	25.0 ft
66.7R	58.4 fc	33.3 ft
83.3R	37.5 fc	41.6 ft
100.0R	26.0 fc	50.0 ft


■ Beam Spread: 28.1°

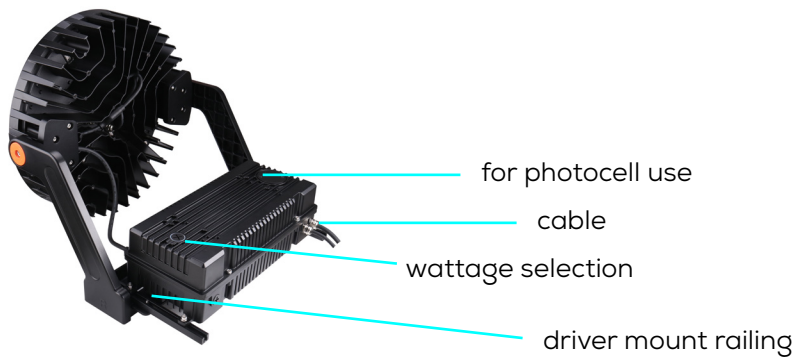

wattage selection

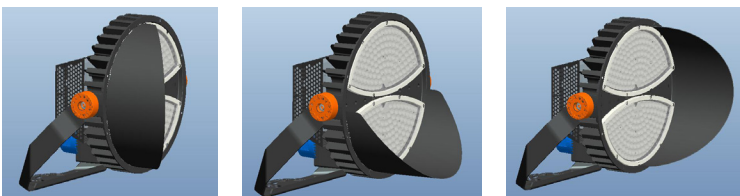

shields can be installed in different directions

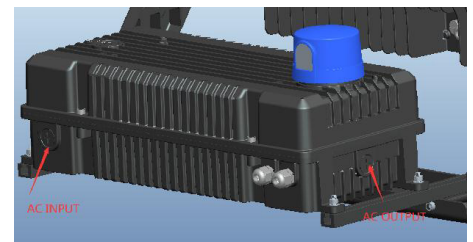



SP06


**DMX CONTROLLED
RGBW SPORT
LIGHT**

Project: _____ Type: _____


Name: _____ Date: _____

DIMENSIONS:

750W

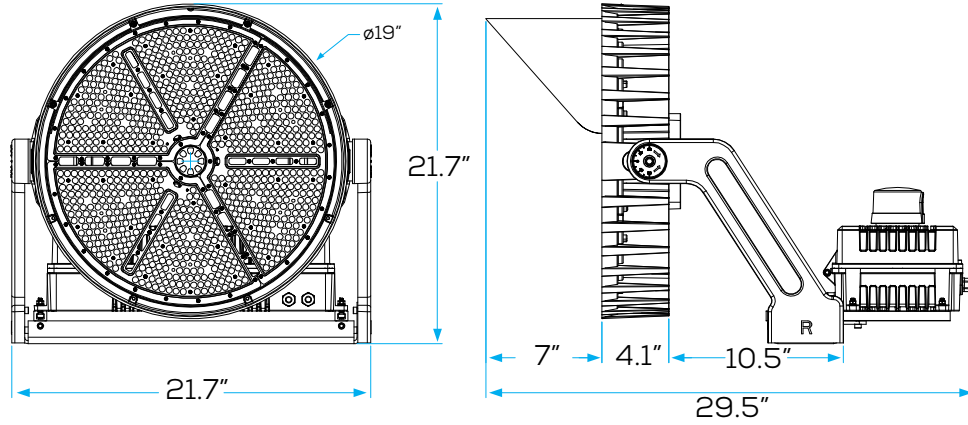

1200W

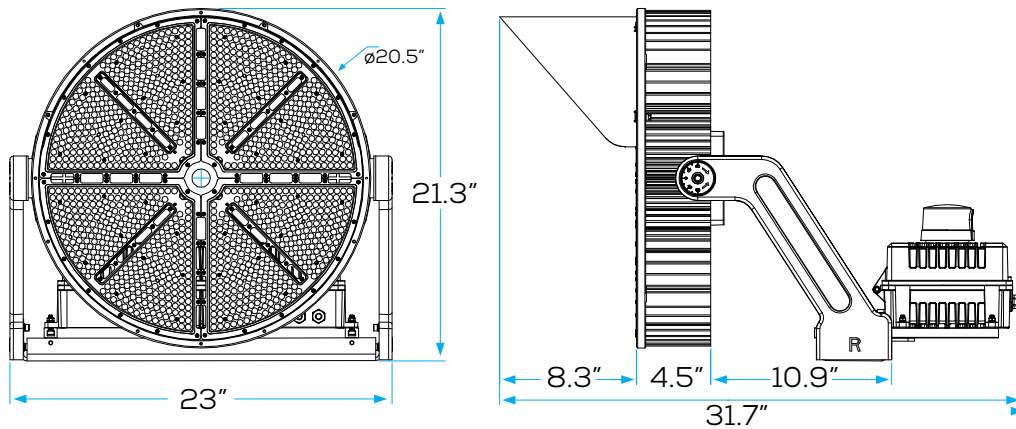



SP06

DMX CONTROLLED
RGBW SPORT
LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> SP06	<input checked="" type="checkbox"/> RGBW	<input type="checkbox"/> 750W <input type="checkbox"/> 1200W	<input checked="" type="checkbox"/> 30°	<input checked="" type="checkbox"/> 120-277V

SES-SP06-CCT-500W
Example Model Number

SES - SP06 - RGBW - 30° - 120-277V

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

Common Stock Models:

Item #	Model #
11331	SES-SP06-RGB-750W
11333	SES-SP06-RGBW-1200W

Optional Accessories:

Item #	Model #	QTY:
10899	JL-205C-PHOTOCELL	
11328-A	SES-SP06-SLIP	
11328-B	SES-SP06-SHIELD	
11328-C	SES-SP06-LENS	
11328-D	SES-SP06-CORD	



Slip Fitter



Shield



Lens



#14 Cord