



PL2

SLIM SHOEBOX LIGHT

Project: _____ Type: _____

Name: _____ Date: _____



Size	see dimensions
Watts	150W, 300W, 500W
Voltage	11303: 120-277V 11304,11306: 100-277V
Dimming	0-10V
Beam Angle	Type 3
CRI	70
PF	≥ 0.9

Lumens	11306: 25,500lm 11303: 45,000lm 11304: 75,000lm
CCT	5700K
IP Rating	IP65
Materials	Aluminum, PC
Finish	Bronze
Lens	Clear
Lifespan	50,000 Hours

OVERVIEW

CCT: 5700K

Applications: IP65

Efficacy: 155-170lm/W

Dimming: Non-Dimming

LED Type: SMD2835

Lens Type: Clear

Driver: SS-160NH

Operating Temp: -40F° to 113F°

Operating Humidity: 10%-95%RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Mount Options: Slip Fitter Mount & Large Yoke Mount
- Protected from the elements with an IP65 rating making it suitable for wet conditions



SARIN LED Slim Shoebox Lights are commonly used to replace high-pressure sodium and metal halide lights to provide energy savings of up to 70%. These area lights are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers.

SARIN Slim Shoebox Lights are perfect for stadiums, parks, billboards, parking lots, and office buildings. A photocell sensor allows the light to automatically activate at night. This fixture turns on and off instantly without flickering or humming. The lens has a glare-reduction composition that softens the light and makes it more uniform and safe to the eye.





PL2


SLIM SHOEBOX LIGHT

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:


11304

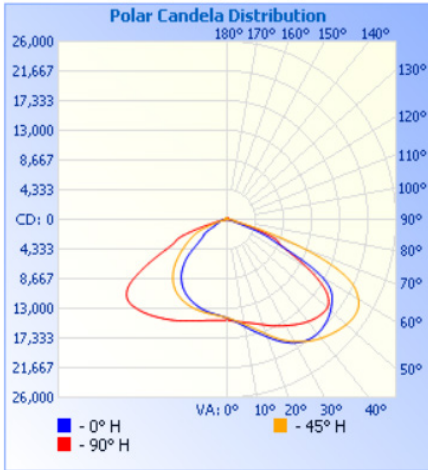

11303

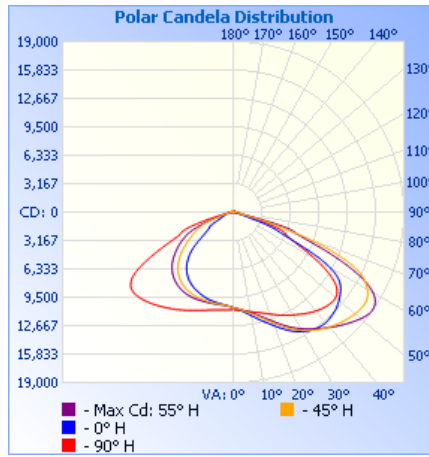

11306

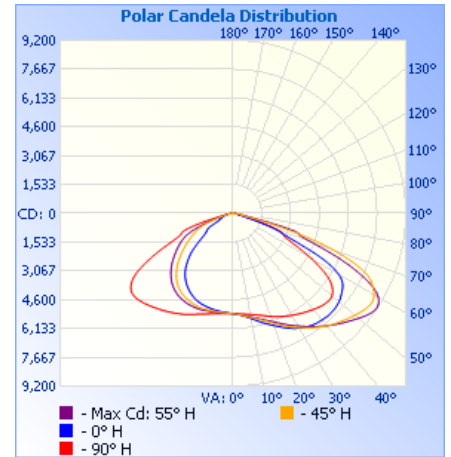

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	778 fc	9.3 ft	14.1 ft
8.7ft	190 fc	18.8 ft	28.5 ft
13.0ft	85.2 fc	28.1 ft	42.6 ft
17.3ft	48.1 fc	37.4 ft	56.7 ft
21.7ft	30.6 fc	47.0 ft	71.2 ft
26.0ft	21.3 fc	56.3 ft	85.3 ft

■ Vert. Spread: 94.5°
■ Horiz. Spread: 117.2°

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	575 fc	9.3 ft	14.1 ft
8.7ft	140 fc	18.8 ft	28.5 ft
13.0ft	62.9 fc	28.1 ft	42.6 ft
17.3ft	35.5 fc	37.4 ft	56.7 ft
21.7ft	22.6 fc	47.0 ft	71.2 ft
26.0ft	15.7 fc	56.3 ft	85.3 ft

■ Vert. Spread: 94.5°
■ Horiz. Spread: 117.2°

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	289 fc	9.3 ft	13.8 ft
8.7ft	70.6 fc	18.8 ft	28.0 ft
13.0ft	31.6 fc	28.0 ft	41.9 ft
17.3ft	17.8 fc	37.3 ft	55.7 ft
21.7ft	11.3 fc	46.8 ft	69.9 ft
26.0ft	7.90 fc	56.1 ft	83.7 ft

■ Vert. Spread: 94.3°
■ Horiz. Spread: 116.3°

DIMENSIONS:

