




MWP10

CCT, WATTAGE ADJUSTABLE MINI WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

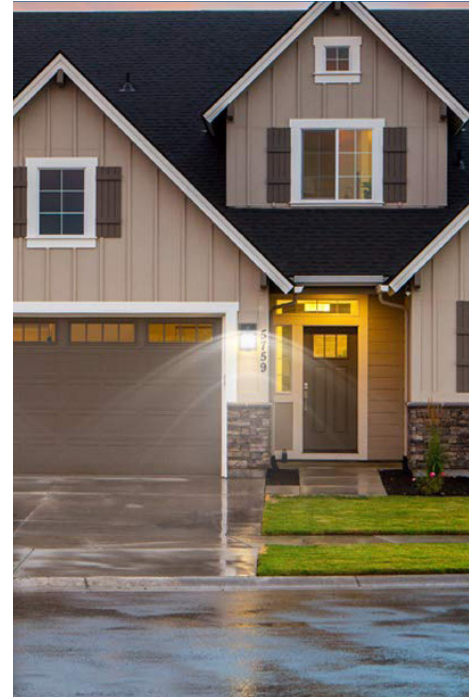

Size	5.35" W x 8.7" H x 2.8" D	Lumens	2,014lm - 4,050lm
Watts	15W/20W/30W	CCT Tunable	3000K, 4000K, 5700K
Voltage	120-277V	IP Rating	IP65
Dimming	0-10V	Materials	Aluminum, PC
Beam Angle	100°	Finish	Bronze
CRI	>80	Lens	Clear
PF	≥0.9	Lifespan	50,000 Hours

OVERVIEW

- Tunable:** CCT
- Applications:** IP65
- Efficacy:** 125-141lm/W
- Dimming:** 0-10V
- LED Type:** Lumileds 2835
- Lens Type:** Clear
- Driver:** HB-FL19F025
- Operating Temp:** -40F° to 122F°
- Operating Humidity:** 10% - 90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

FEATURES

- Offers cool white light with a 100° beam spread
- Photocell Light Sensor automatically activates the lights when dark



SARIN LED MINI WALL PACKS are commonly used to replace high-pressure sodium and metal halide lights to provide energy savings of up to 70%. These lights provide great lighting to poorly lit areas. They are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers.

This wall pack adopts the latest technology, replacing traditional bulbs with energy efficient LEDs. These are widely used in the lighting of homes, hotels, offices, hallways, garages, streets, landscapes and other commercial spaces. These fixtures are suitable for a variety of applications.





MWP10


CCT, WATTAGE
ADJUSTABLE MINI
WALL PACK

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:

20W

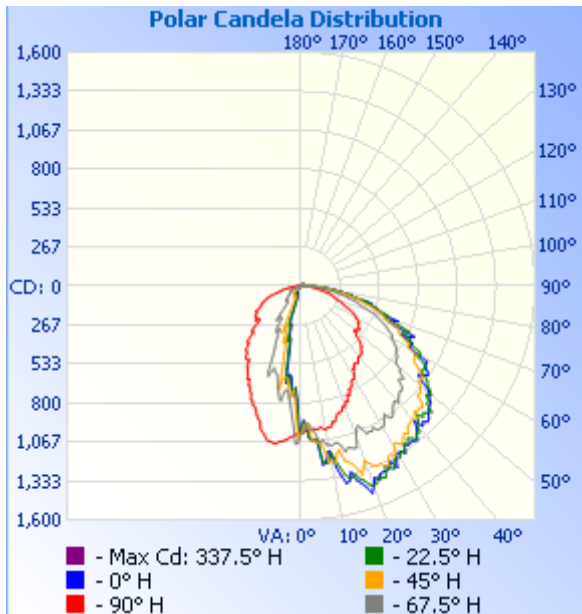

30W

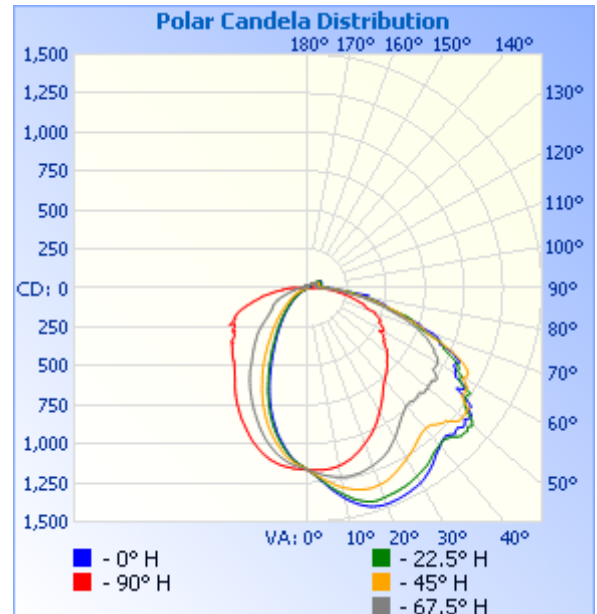

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	54.5 fc	6.0 ft	8.9 ft
8.7ft	13.3 fc	12.0 ft	17.9 ft
13.0ft	5.97 fc	18.0 ft	26.8 ft
17.3ft	3.37 fc	24.0 ft	35.7 ft
21.7ft	2.14 fc	30.0 ft	44.7 ft
26.0ft	1.49 fc	36.0 ft	53.6 ft


■ Vert. Spread: 69.4°
■ Horiz. Spread: 91.7°

Illuminance at a Distance

	Center Beam fc	Beam Width	
4.3ft	63.1 fc	8.8 ft	14.5 ft
8.7ft	15.4 fc	17.9 ft	29.4 ft
13.0ft	6.90 fc	26.7 ft	44.0 ft
17.3ft	3.90 fc	35.6 ft	58.5 ft
21.7ft	2.48 fc	44.6 ft	73.4 ft
26.0ft	1.73 fc	53.4 ft	87.9 ft

■ Vert. Spread: 91.6°
■ Horiz. Spread: 118.8°

DIMENSIONS:

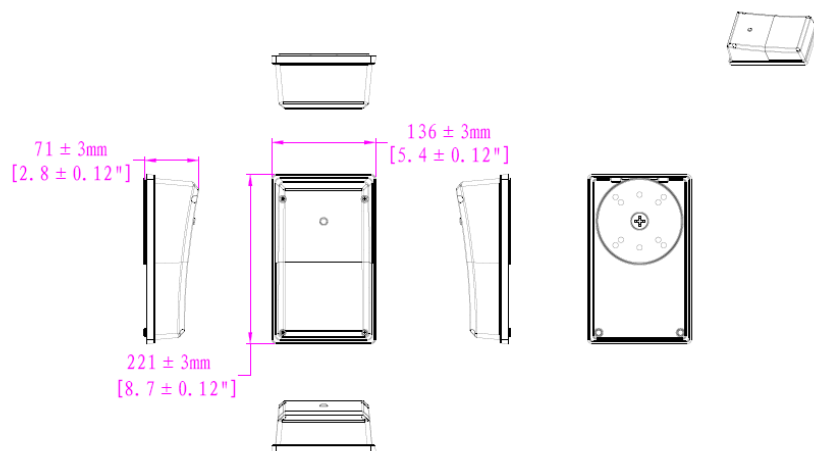



MWP10

CCT, WATTAGE
ADJUSTABLE MINI
WALL PACK

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
SES- Example Model Number	<input checked="" type="checkbox"/> MWP09	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 15W <input checked="" type="checkbox"/> 20W <input checked="" type="checkbox"/> 30W	<input checked="" type="checkbox"/> 100°	<input checked="" type="checkbox"/> 120-277V
	SES — MWP10 — Tunable — Tunable — 100° — 120-277V				
Quantity	Fixture	CCT	Watts	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11391	SES-MWP10-CCT-15/20/30

