



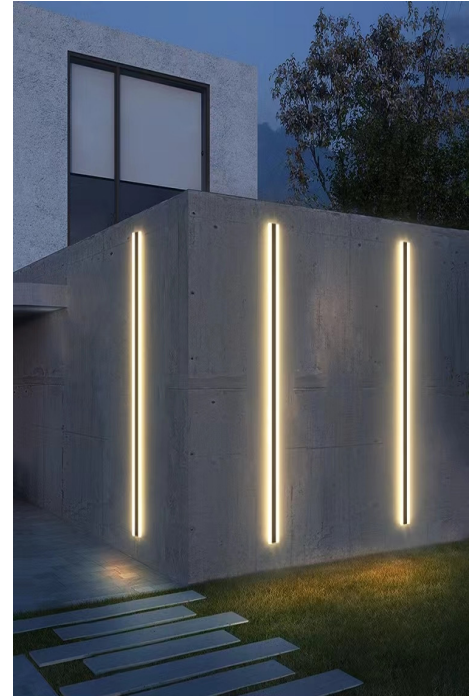

# WL9002 | LINEAR WALL SCONCE CCT TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

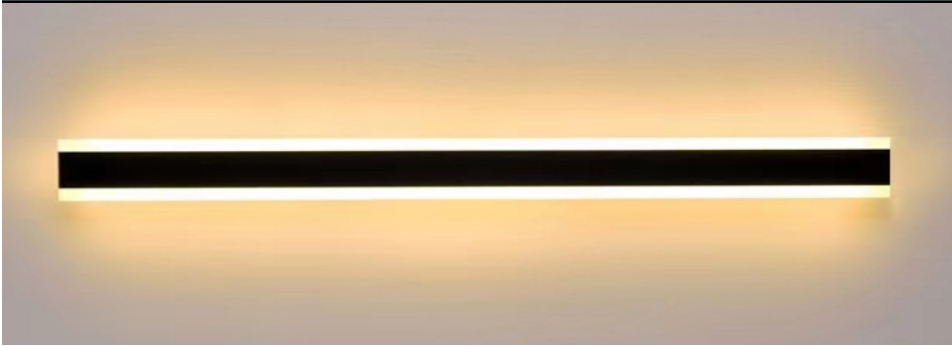

<b>Size</b>	see dimensions
<b>Watts</b>	8W, 16W, 25W, 35W
<b>Voltage</b>	90-264V
<b>Dimming</b>	Non-Dimming
<b>Beam Angle</b>	140°
<b>CRI</b>	80
<b>PF</b>	0.95

<b>Lumens</b>	232lm, 464lm, 725lm, 1015lm
<b>CCT</b>	3000K+4000K+6000K
<b>IP Rating</b>	IP54
<b>Materials</b>	Aluminum, Acrylic
<b>Finish</b>	Black
<b>Lens</b>	Frosted
<b>Lifespan</b>	20,000 Hours

## OVERVIEW

**Applications:** IP54

**Efficacy:** 29lm/W

**Dimming:** Non-Dimming

**LED Type:** SMD

**Operating Temp:** 5° to 122°F

**Operating Humidity:** 10% - 90%RH

**Lifespan:** 20,000 Hours

**Warranty:** 2 Years

## FEATURES

- Protected from the elements with an IP54 rating making it suitable for rainy environments
- Offers three color temperatures with a 140° beam spread

The SARIN Linear Wall Sconce is a modern, outdoor wall sconce that adds functional lighting and brilliance to any area. Constructed from solid aluminum, this fixture boasts a sleek look with a black finish. Designed to create an elegant ambiance, the energy-efficient wall light casts a gentle glow of halo effect from the slimline bar. This minimalist LED wall light can be installed horizontally or vertically, so that it's easy to adjust it to suit different interior designs.

With an IP54 rating, these sconces are safe to use in wet locations that come in direct contact with rain and water. This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.






# WL9002 | LINEAR WALL SCONCE CCT TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

16W

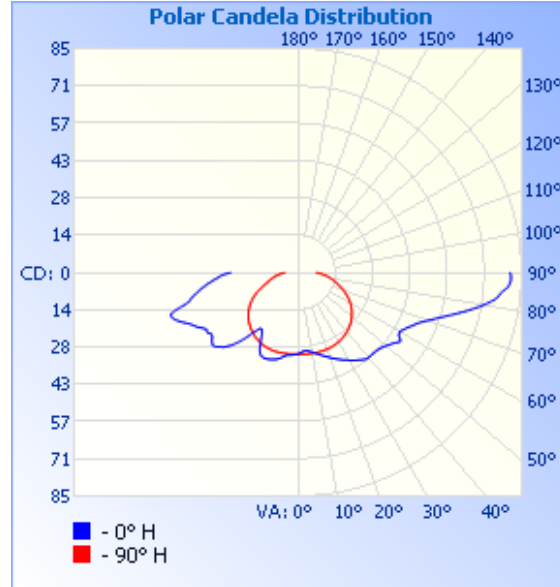

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
1.7ft	10.7 fc	1.8 ft	3.9 ft
3.3ft	2.84 fc	3.5 ft	7.6 ft
5.0ft	1.24 fc	5.2 ft	11.5 ft
6.7ft	0.69 fc	7.0 ft	15.3 ft
8.3ft	0.45 fc	8.7 ft	19.0 ft
10.0ft	0.31 fc	10.5 ft	22.9 ft

■ Vert. Spread: 55.4°  
■ Horiz. Spread: 97.7°

## IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.




**WL9002 | LINEAR WALL  
SCONCE CCT  
TUNABLE**

Project: \_\_\_\_\_ Type: \_\_\_\_\_


Name: \_\_\_\_\_ Date: \_\_\_\_\_

**DIMENSIONS:**


**2 FOOT:**

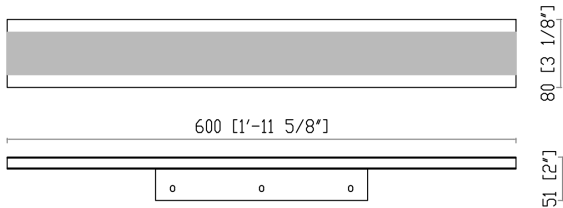


**4 FOOT:**

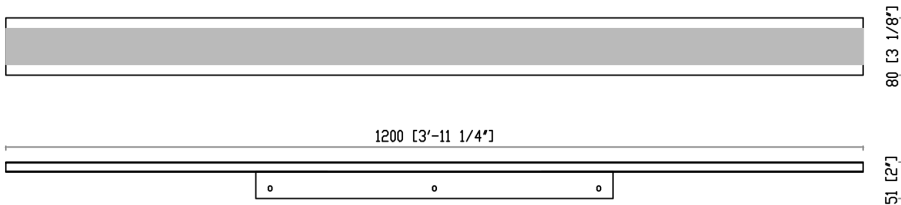

**6 FOOT:**

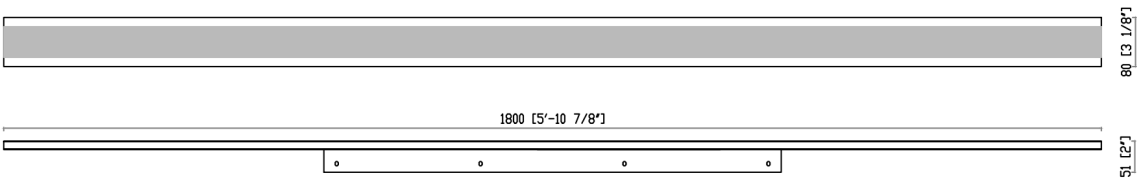

**8 FOOT:**

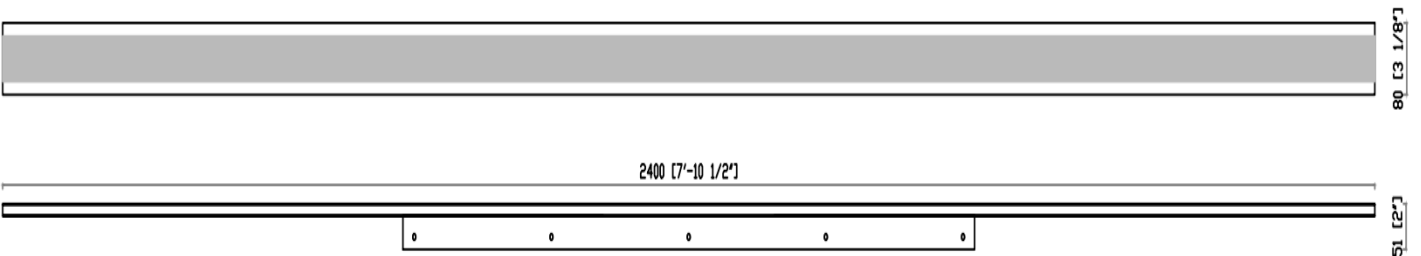



# WL9002 | LINEAR WALL SCONCE CCT TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
	<input checked="" type="checkbox"/> WL9002	<input checked="" type="checkbox"/> CCT	<input type="checkbox"/> 8W	<input checked="" type="checkbox"/> 140°	<input checked="" type="checkbox"/> 100-240V
			<input type="checkbox"/> 16W		
			<input type="checkbox"/> 25W		
			<input type="checkbox"/> 35W		

SES-WL9002-CCT-16  
Example Model Number

---

**SES - WL9001 - CCT - 16 - 140° - 100-240V**

Quantity	Fixture	CCT	Watts	Beam Angle	Voltage
----------	---------	-----	-------	------------	---------

### Common Stock Models:

Item #	Model #
11289	SES-WL9002-CCT-8
11290	SES-WL9002-CCT-16
11291	SES-WL9002-3000-25
11292	SES-WL9002-CCT-35

### Optional Accessories:

Item #	Model #
41260-B	SES-WL900-PLATE-S-BK
41260-D	SES-WL900-PLATE-L-BK

41260-B



2' Back Plate

41260-D



4', 6', 8' Back Plate