

DL1.5 | MINI DOWNLIGHT

Project:_____ Type:_____

Name:_____ Date:_____



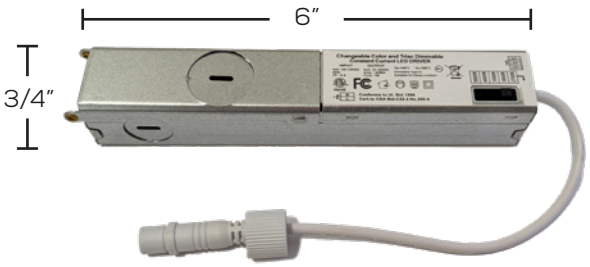

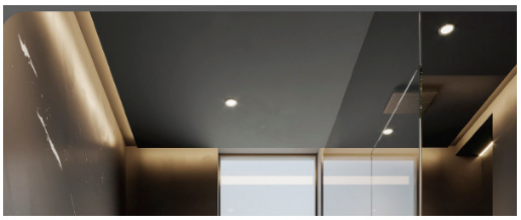



Size	1.58″ x 3.35″	**Lumens**	33-38lm/W 30-35lm/W
Watts	7W	**CCT**	2700K + 3000K + 3500 4000K + 5000K
Voltage	120V	**IP Rating**	IP65
Dimming	Switch Dimmable	**Materials**	Aluminum, PMMA
Beam Angle	24°	**Finish**	White Trim / Black Trim
PF	.90	**Lens**	Clear
CRI	≥90	**Lifespan**	50,000 Hours

OVERVIEW

CCT: Adjustable

Applications: Wet (IP65)

Efficacy: 30-35lm/W

Dimming: CCT Switch / TRIAC Dimming

LED Type: COB

Operating Temp: -4°F to 113°F

Lifespan: 50,000 hours

Warranty: 5 years

FEATURES

- CRI of 90 renders light temperature consistently in various environments, giving colors true clarity
- LED Adjustable CCT Downlights are perfect for homes, schools, offices and hotels
- Extra long lifetime

SARIN's Architectural Recessed Downlights are engineered for precision and versatility. These downlights seamlessly integrate into any architectural design. Experience ultimate control with CCT tunability, allowing for on-demand adjustment of color temperature to create the perfect ambiance. These downlights offer exceptional performance in a discreet form factor.


Isolated Flicker Free driver included.

DL1.5 | MINI DOWNLIGHT

Project:_____ Type:_____

Name:_____ Date:_____

PHOTOMETRICS

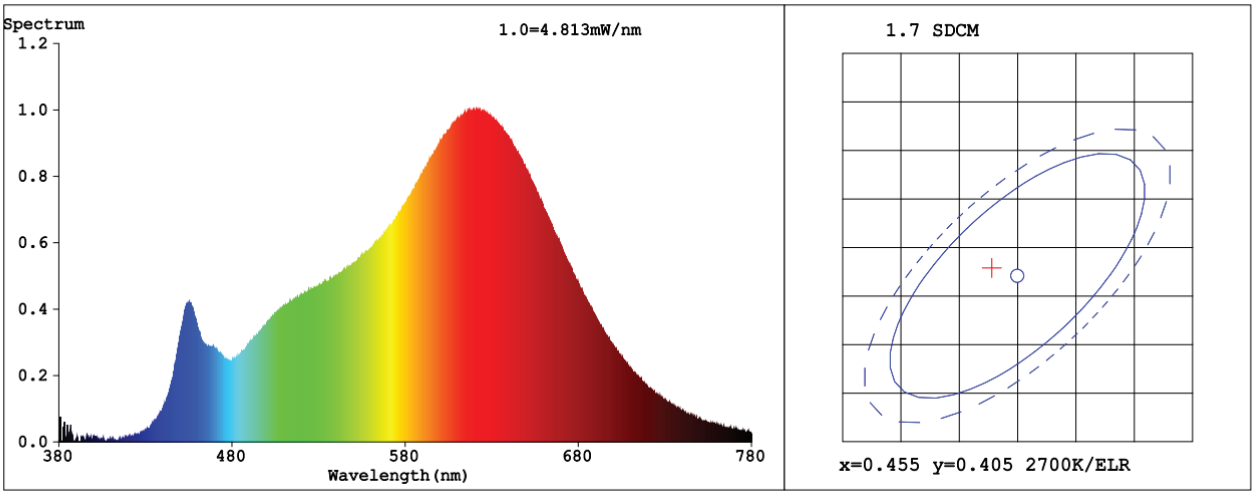


DL1.5 | MINI DOWNLIGHT


Project:_____ Type:_____


Name:_____ Date:_____


DIMENSIONS







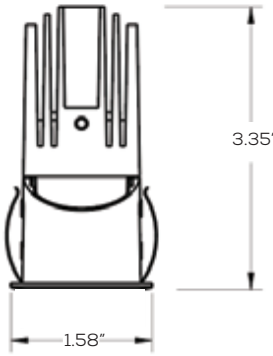

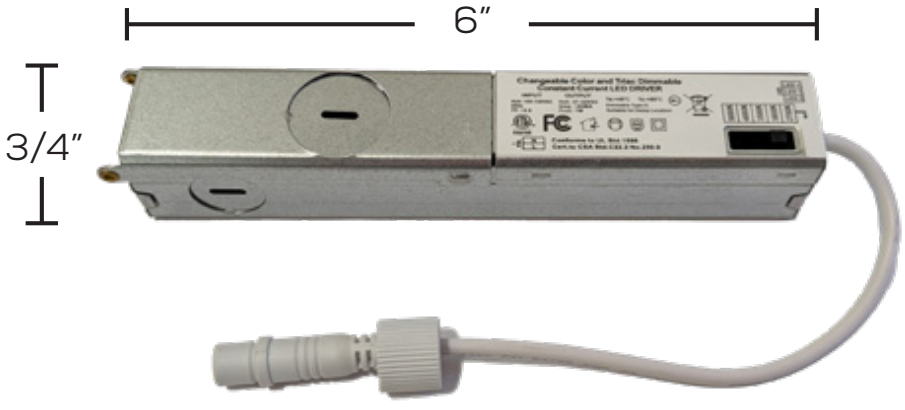

INSTRUCTIONS

IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS

Instructions pertaining to a risk of fire, electric shock or injury to persons.

-WARNING-

Recessed downlight installation requires knowledge of luminaires electrical systems Installation should be done by a certified electrician
To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects
Suitable for damp Location
Energy Star rated, IC-rated for direct contact with insulation, airtight rated and ETL certified listed compliant

INSTRUCTIONS IMPORTANTES DE SÉCURITÉ GARDER CES INSTRUCTIONS

Ces instructions se rapportent à un risque d'incendie, de chocs électriques ou de blessures corporelles.

-ATTENTION-


L'installation du plafonnier encastré doit être effectuée conformément aux codes électriques locaux L'installation doit être fait par un électricien certifié.
Pour éviter d'endommager le câblage, ne pas exposer à tout objet tranchant.
Convient aux endroits mouillés
Certifié Énergy Star. Certifié IC (installation dans les plafonds isolés), hermétique et ETL

.

	Lumens per fixture Nombre de lumen par luminaire	Total consumption Consommation totale	Light color Couleur de la lumière.
LP-15C1039	300LM	7W	2700K 3000K 3500K 4000K 5000K

Integrated driver is dimmable with most regular dimmers.
(Low voltage electronic dimmer suggested)
Refer to local distributor or sales for dimmer compatibility list.

Le transformateur intégré est graduable avec la plupart des gradateurs
(Gradateur électronique bas voltage recommandé)
Reportez-vous au distributeur local ou au service des ventes pour la liste de compatibilité des gradateurs.

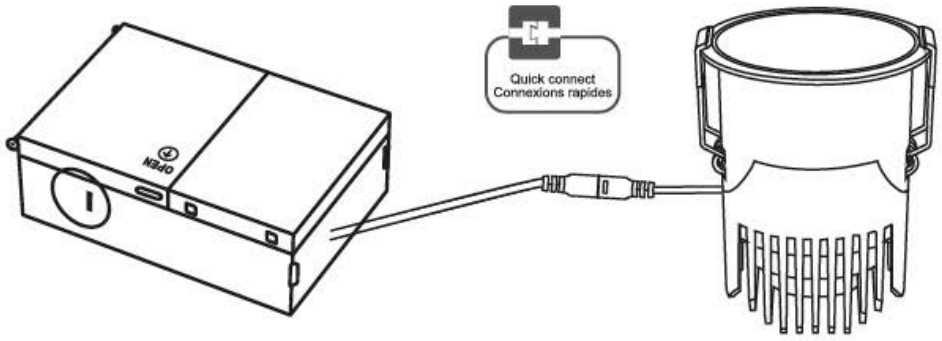

-

- 5CCT (2700K/3000K/3500K/4000K/5000K)



There is dip switch on the front of junction box, and regularly marks 2700K/3000K/3500K/4000K/5000K , the dip switch also called CCT selectable.

By dip switch

Select certain color temperature (2700K/3000K/3500K/4000K/5000K) on dip switch, then the light will be that color. Wall switch only has ON/OFF function under this situation.

Warranty

Our warranty applies to manufacturing defects affecting its products which existed at the time of the purchase of the product, that are non-apparent, and are unknown to the buyer, for LIFETIME WARRANTY * conditions apply. This warranty applies to the product only and does not cover the installation of the product.
* The warranty does not apply to material, economic and/or physical damages or losses caused by the product.
* This warranty will not apply to any damages and/or losses caused by an incorrect use, installation or maintenance of the product. (The manufacturer is therefore not responsible for damages to the product or material, economic and/or physical damages or losses caused by an incorrect use, installation or maintenance of the product.)
If the buyer considers that the product is affected by a defect, the buyer should return the product to the point of purchase.
We need a decription of the alleged problem and a proof of purchase as well as the picture clearly illustrating the alleged defect should be attached to the email.
The buyer should also return the product to the point of purchase at his/her own expense. After product inspection, if the warranty applies, we will repair or replace the product free of charge.

See reverse side for more instructions
Voir au verso pour plus d'instructions


INSTRUCTIONS

instructions before installation / Instructions avant installation

WARNING - BEFORE STARTING INSTALLATION , SHUT THE LINE FEED POWER OFF USING THE CIRCUIT BREAKER . - **WARNING**
ATTENTION – AVANT DE DÉBUTER L'INSTALLATION. COUPER L'ALIMENTATION DU FIL DU SECTEUR À L'AIDE DU DISJONCTEUR.- **ATTENTION**


Installation instructions I Instructions d'installation

1




Find out the template (for the hole size installation) in the back of the box. Use the circle template to measure the size of hole. Then cut out hole.

2




Open the box
Take out accessory of wire clip.

3




Use tool to remove one of the knockouts of the side plate.

4




Remove one of the knockouts on the side plate. Put wires through the hole.

5

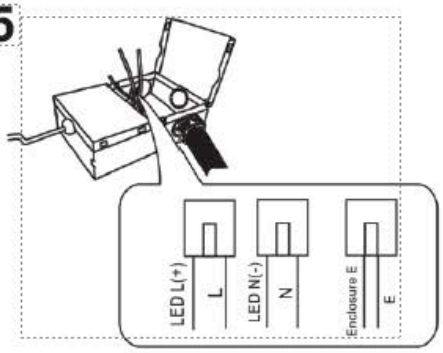

6

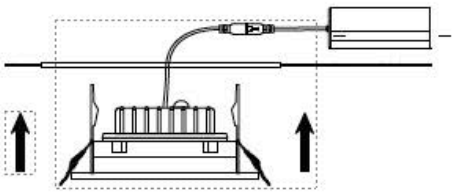

Holding the clips, and push the fixture into installation hole.
Release spring clips and push into place.

See reverse side for more instructions
Voir au verso pour plus d'instructions

2

Intertek

DL1.5 | MINI DOWNLIGHT

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Finish	Voltage
☑ DL1.5	☑ Tunable	☑ 7W	☐ White Trim	☑ AC 120V
			☐ Black Trim	

SES-DL1.5-CCT-7-BK
Example Model Number

Quantity		SES	–	DL1.5	–	Tunable	–	7W	–		–	AC120
				Fixture		CCT		Watts		Finish		Voltage

Common Stock Models:

Item #	Model #
11494	SES-DL1.5-CCT-7-WH
11495	SES-DL1.5-CCT-7-BK

©2025