




WL10001 | LINEAR WALL SCONCE CCT TUNABLE

Project: _____ Type: _____

Name: _____ Date: _____

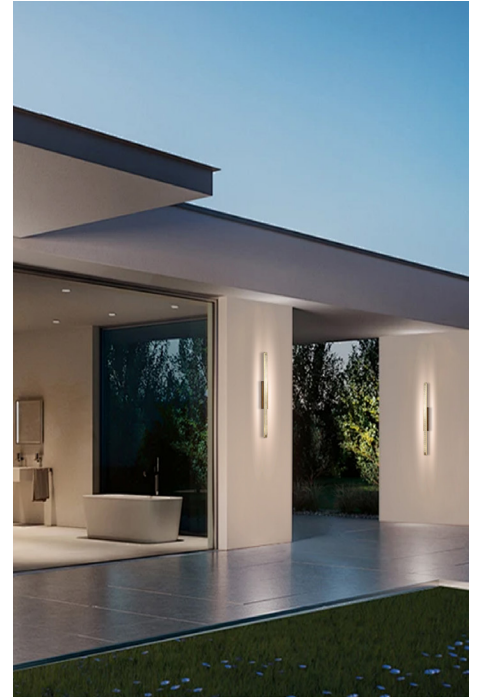

Size	2', 4', 6', 8'
Watts	12W, 24W, 36W, 43W
Voltage	120-277V
Dimming	Non-Dimming
Beam Angle	120°
CRI	80
PF	0.95

Lumens	540lm, 1080lm, 1620lm, 1935lm
CCT	2700K+4000K+5000K
IP Rating	IP54
Materials	Aluminum, Acrylic
Finish	Black*
Lens	Frosted
Lifespan	35,000 Hours

OVERVIEW

Applications: IP54

Efficacy: 45lm/W

Dimming: TRZAC

LED Type: SMD

Operating Temp: 5° to 122°F

Operating Humidity: 10% - 90%RH

Lifespan: 35,000 Hours

Warranty: 3 Years

FEATURES

- Protected from the elements with an IP54 rating making it suitable for rainy environments
- Offers three color temperatures with a 120° beam spread

OPTIONS

*Bronze finish available



The SARIN Linear Wall Sconce is a modern, outdoor wall sconce that adds functional lighting and brilliance to any area. Constructed from solid aluminum, this fixture boasts a sleek look with a black finish. Designed to create an elegant ambiance, the energy-efficient wall light casts a gentle glow of halo effect from the slimline bar. This minimalist LED wall light can be installed horizontally or vertically, so that it's easy to adjust it to suit different interior designs.

With an IP54 rating, these sconces are safe to use in wet locations that come in direct contact with rain and water. This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.



WL10001


LINEAR WALL SCONCE CCT TUNABLE

Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

16W

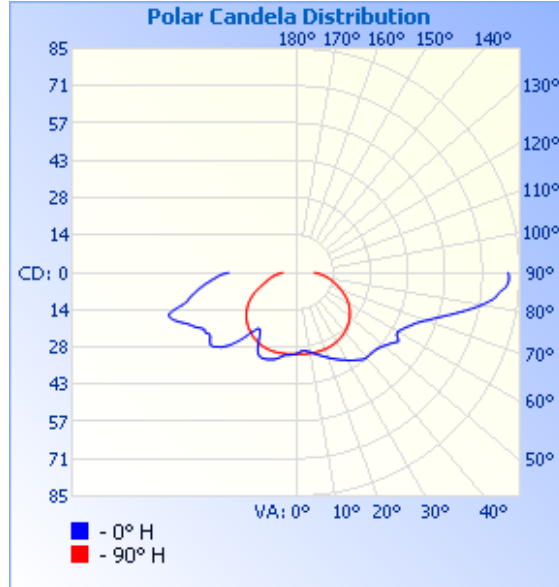

Illuminance at a Distance

	Center Beam fc	Beam Width	
1.7ft	10.7 fc	1.8 ft	3.9 ft
3.3ft	2.84 fc	3.5 ft	7.6 ft
5.0ft	1.24 fc	5.2 ft	11.5 ft
6.7ft	0.69 fc	7.0 ft	15.3 ft
8.3ft	0.45 fc	8.7 ft	19.0 ft
10.0ft	0.31 fc	10.5 ft	22.9 ft

Legend:
 ■ Vert. Spread: 55.4°
 ■ Horiz. Spread: 97.7°

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.



WL10001 | LINEAR WALL SCONCE CCT TUNABLE

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
	<input checked="" type="checkbox"/> WL10001	<input checked="" type="checkbox"/> CCT	<input type="checkbox"/> 12W	<input checked="" type="checkbox"/> 120°	<input checked="" type="checkbox"/> 100-277V
			<input type="checkbox"/> 24W		
			<input type="checkbox"/> 36W		
			<input type="checkbox"/> 43W		

SES-WL10001-CCT-12-2FT
Example Model Number

SES - WL10001 - CCT - 12 - 120° - 100-277V

Quantity

Fixture

CCT

Watts

Beam Angle


Voltage

Common Stock Models:


Option Accessories

Item #	Model #
11655	SES-WL10001-CCT-12-2FT
11656	SES-WL10001-CCT-24-4FT
11657	SES-WL10001-CCT-36-6FT
11658	SES-WL10001-CCT-43-8FT


Item #	Model #
11672	SES-WL1000X-DP-2FT
11673	SES-WL1000X-DP-4FT
11674	SES-WL1000X-DP-6FT
11675	SES-WL1000X-DP-8FT




11672- 2ft
Replacement
Cover



11673- 4ft
Replacement
Cover



11674- 6ft
Replacement
Cover



11675- 8ft
Replacement
Cover