




# WL10001 | LINEAR WALL SCONCE CCT TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

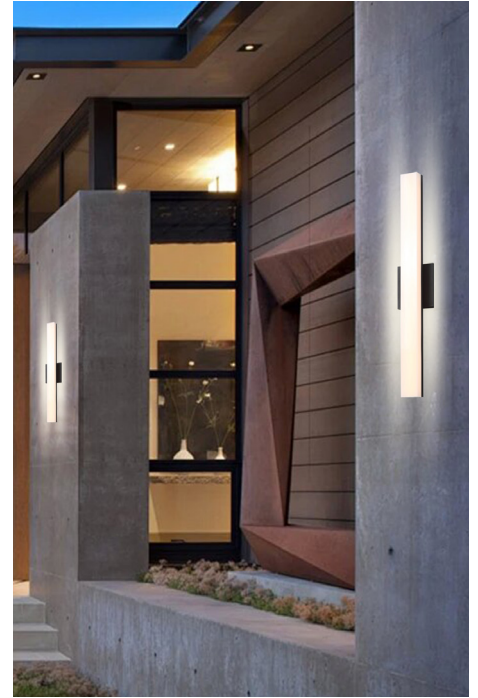

<b>Size</b>	2', 4', 6', 8'
<b>Watts</b>	12W, 24W, 36W, 43W
<b>Voltage</b>	120-277V
<b>Dimming</b>	Non-Dimming
<b>Beam Angle</b>	120°
<b>CRI</b>	80
<b>PF</b>	0.95

<b>Lumens</b>	540lm, 1080lm, 1620lm, 1935lm
<b>CCT</b>	2700K+4000K+5000K
<b>IP Rating</b>	IP54
<b>Materials</b>	Aluminum, Acrylic
<b>Finish</b>	Black*
<b>Lens</b>	Frosted
<b>Lifespan</b>	35,000 Hours

## OVERVIEW

**Applications:** IP54

**Efficacy:** 45lm/W

**Dimming:** TRZAC

**LED Type:** SMD

**Operating Temp:** 5° to 122°F

**Operating Humidity:** 10% - 90%RH

**Lifespan:** 35,000 Hours

**Warranty:** 3 Years

## FEATURES

- Protected from the elements with an IP54 rating making it suitable for rainy environments
- Offers three color temperatures with a 120° beam spread

## OPTIONS

\*Bronze finish available



The SARIN Linear Wall Sconce is a modern, outdoor wall sconce that adds functional lighting and brilliance to any area. Constructed from solid aluminum, this fixture boasts a sleek look with a black finish. Designed to create an elegant ambiance, the energy-efficient wall light casts a gentle glow of halo effect from the slimline bar. This minimalist LED wall light can be installed horizontally or vertically, so that it's easy to adjust it to suit different interior designs.

With an IP54 rating, these sconces are safe to use in wet locations that come in direct contact with rain and water. This decorative LED wall sconce is ideal for any exterior wall on hotels, homes, and offices.



WL10001


# LINEAR WALL SCONCE CCT TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

16W

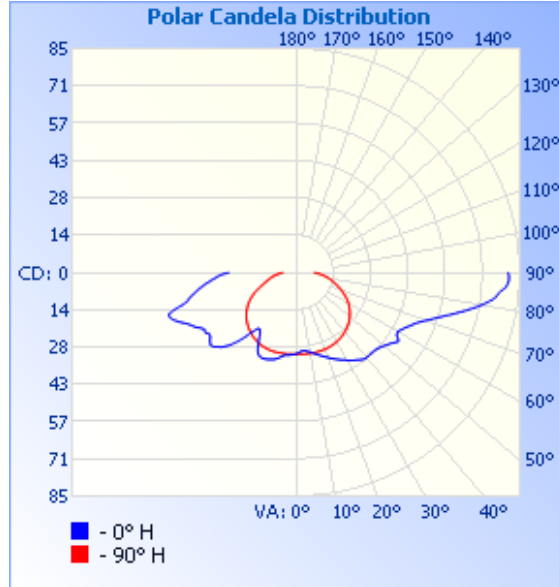

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
1.7ft	10.7 fc	1.8 ft	3.9 ft
3.3ft	2.84 fc	3.5 ft	7.6 ft
5.0ft	1.24 fc	5.2 ft	11.5 ft
6.7ft	0.69 fc	7.0 ft	15.3 ft
8.3ft	0.45 fc	8.7 ft	19.0 ft
10.0ft	0.31 fc	10.5 ft	22.9 ft

■ Vert. Spread: 55.4°  
■ Horiz. Spread: 97.7°

## IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.



WL10001

LINEAR WALL  
SCONCE CCT  
TUNABLE

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

	<b>Fixture</b>	<b>CCT</b>	<b>Watts</b>	<b>Beam Angle</b>	<b>Voltage</b>
	<input checked="" type="checkbox"/> WL10001	<input checked="" type="checkbox"/> CCT	<input type="checkbox"/> 12W	<input checked="" type="checkbox"/> 120°	<input checked="" type="checkbox"/> 100-277V
			<input type="checkbox"/> 24W		
			<input type="checkbox"/> 36W		
			<input type="checkbox"/> 43W		

SES-WL10000-CCT-12-2FT  
Example Model Number

**SES - WL10000 - CCT - 12 - 120° - 100-277V**


<b>Quantity</b>	<b>Fixture</b>	<b>CCT</b>	<b>Watts</b>	<b>Beam Angle</b>	<b>Voltage</b>
-----------------	----------------	------------	--------------	-------------------	----------------

Common Stock Models:


Option Accessories

Item #	Model #
11668	SES-WL10001-CCT-12-2FT
11669	SES-WL10001-CCT-24-4FT
11670	SES-WL10001-CCT-36-6FT
11671	SES-WL10001-CCT-43-8FT


Item #	Model #
11672	SES-WL1000X-DP-2FT
11673	SES-WL1000X-DP-4FT
11674	SES-WL1000X-DP-6FT
11675	SES-WL1000X-DP-8FT




11672- 2ft  
Replacement  
Cover



11673- 4ft  
Replacement  
Cover



11674- 6ft  
Replacement  
Cover



11675- 8ft  
Replacement  
Cover