




# FLO6E LED OUTDOOR FLOOD LIGHT

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

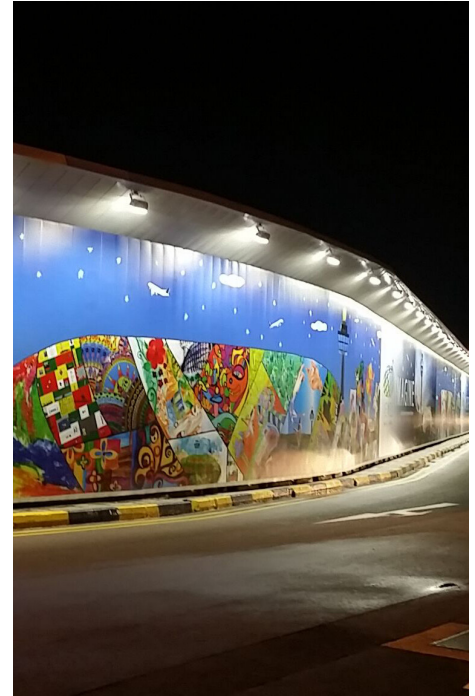

<b>Size</b>	See Dimensions	<b>Lumens</b>	3,870 - 7,150lm
<b>Watts</b>	30W, 50W	<b>CCT</b>	3000K-4000K-5000K
<b>Voltage</b>	120-277V	<b>IP Rating</b>	IP65
<b>Dimming</b>	0-10V	<b>Materials</b>	Die-cast Aluminum
<b>Beam Angle</b>	150°	<b>Finish</b>	Bronze
<b>CRI</b>	>80	<b>Lens</b>	Clear
<b>PF</b>	≥ 0.9	<b>Lifespan</b>	50,000 Hours

## OVERVIEW

- CCT:** Tunable
- Applications:** IP65
- Efficacy:** 125-145lm/W
- Dimming:** 0-10V
- LED Type:** Lumileds 2835
- Lens Type:** Clear
- Driver:** HB-FL19F035, HB-FL19F060, HB-FL19F050
- Operating Temp:** -22°F to 113°F
- Operating Humidity:** 20% - 90% RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

## FEATURES

- CCT tunable with 0-10V dimming options available
- Powder-coated for longevity, built to withstand the elements
- Aluminum body disperses heat better than its counterparts and maximizes LED efficiency



SARIN LED OUTDOOR FLOOD LIGHTS accentuate your building's exterior by adding an overlay of gorgeous lights. These eye-catching LEDs are bound to bring attention with their brightness, which is perfect for high walls and tall objects, adding a new level of flair to homes and businesses, as well as security.

SARIN LED OUTDOOR FLOOD LIGHTS have multiple options to choose from to fit your specific needs. They come in 30W or 50W models are CCT tunable. These long-lasting lights come with either adjustable yoke or knuckle mount options, giving a multitude of application possibilities. They are rated for outdoor use and feature high-quality, weather-proof powder-coating with an aluminum body that disperses heat efficiently.






# FLO6E | LED OUTDOOR FLOOD LIGHT

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

### 30W

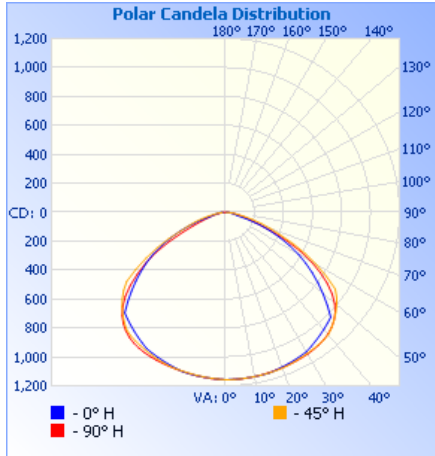


**Illuminance at a Distance**

Center Beam fc	Beam Width	
2.5ft	185 fc	8.7 ft 9.0 ft
5.0ft	46.3 fc	17.4 ft 18.1 ft
7.5ft	20.6 fc	26.1 ft 27.1 ft
10.0ft	11.6 fc	34.8 ft 36.1 ft
12.5ft	7.40 fc	43.5 ft 45.1 ft
15.0ft	5.14 fc	52.1 ft 54.2 ft

■ Vert. Spread: 120.2°  
■ Horiz. Spread: 122.0°

### 50W

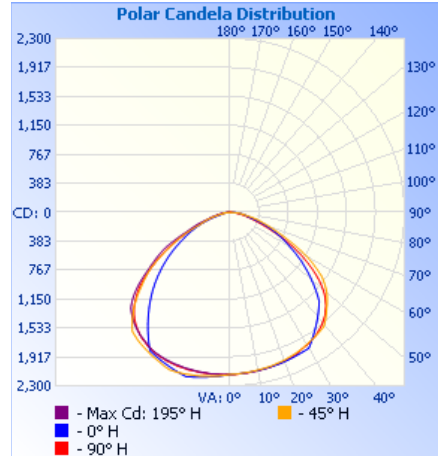


**Illuminance at a Distance**

Center Beam fc	Beam Width	
2.5ft	344 fc	6.8 ft 7.5 ft
5.0ft	85.9 fc	13.6 ft 15.1 ft
7.5ft	38.2 fc	20.3 ft 22.6 ft
10.0ft	21.5 fc	27.1 ft 30.2 ft
12.5ft	13.7 fc	33.9 ft 37.7 ft
15.0ft	9.54 fc	40.7 ft 45.2 ft


■ Vert. Spread: 107.2°  
■ Horiz. Spread: 112.9°

## DIMENSIONS:

Large Yoke Mount

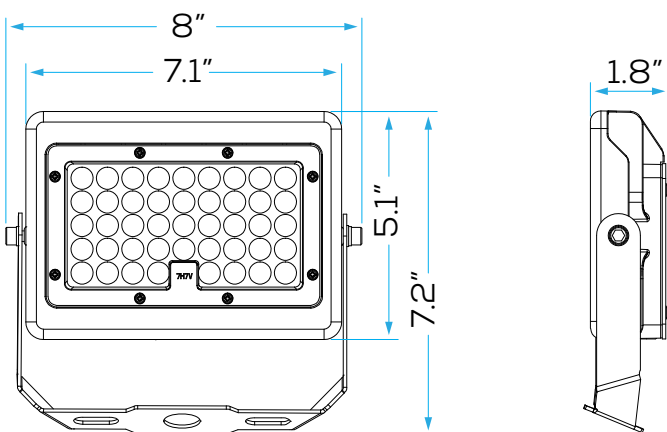

Knuckle Mount

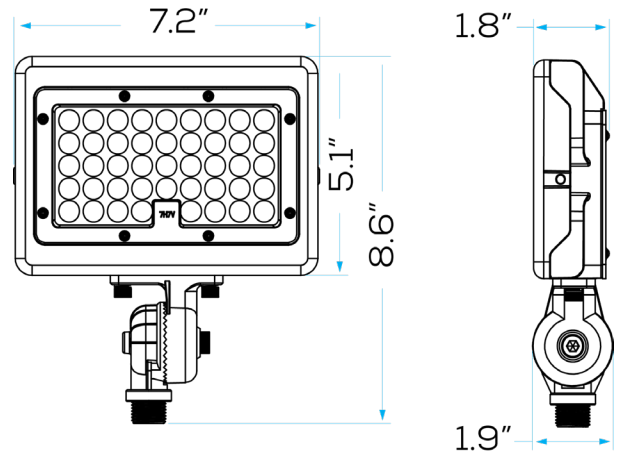



# FLO6E | LED OUTDOOR FLOOD LIGHT

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\* Special Order/Not Commonly Stocked)

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> FLO6E	<input checked="" type="checkbox"/> Tunable	<input type="checkbox"/> 30W	<input checked="" type="checkbox"/> 150°	<input checked="" type="checkbox"/> 120-277V
		<input type="checkbox"/> 50W		

SES-FLO6E-CCT-30W  
Example Model Number

**SES – FLO6E – Tunable – 150° – 120-277V**

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

### Common Stock Models:

Item #	Model #
11340	SES-FLO6E-CCT-30W-YM (Large Yoke)
11341	SES-FLO6E-CCT-50W-YM (Large Yoke)
11454	SES-FLO6E-CCT-50-AM (Knuckle)