



WL2204 | LED CCT WALL SCNCE

Project: _____ Type: _____

Name: _____ Date: _____



Size	6.7" L x 3.2" W x 1.6" D	Lumens	530lm
Watts	7W	CCT	2700K-3000K- 4000K-5500K-6500K
Voltage	100-240V	IP Rating	IP54
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	64.4°	Finish	Black
CRI	>80	Lens	Clear
PF	≥ 0.5	Lifespan	30,000 Hours

OVERVIEW

- CCT:** Tunable
- Applications:** IP54
- Efficacy:** 65-75 lm/W
- Dimming:** Non-Dimming
- LED Type:** SMD3030
- Lens Type:** Clear
- Driver:** SD-PNW006301A
- Operating Temp:** -4° to 104° F
- Operating Humidity:** 10%-65% RH
- Lifespan:** 30,000 Hours
- Warranty:** 3 Years

FEATURES

- Protected from the elements with an IP54 rating making it suitable for wet conditions
- Durable aluminum housing protects from wear and tear

SARIN LED CCT Wall Sconces add functional lighting with a design element to any outdoor area. Constructed from solid aluminum, this contemporary light features a clear crackle glass shade that provides a unique light pattern on surrounding walls when lit. With an IP Rating of IP54, this wall light is highly weather resistant.


This decorative LED wall sconce is ideal for exterior walls on hotels, homes, and offices.

LED Wall Sconces are safe to use in wet locations that come in direct contact with rain and water.





PHOTOMETRICS:

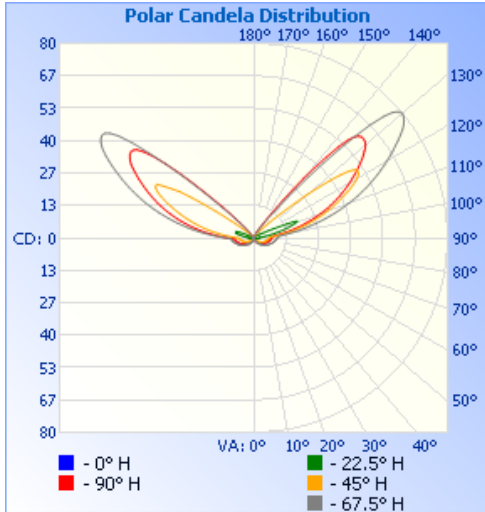


	Center Beam fc	Beam Width
1.7ft	0.12 fc	0.8 ft
3.3ft	0.03 fc	1.6 ft
5.0ft	0.01 fc	2.5 ft
6.7ft	0.01 fc	3.3 ft
8.3ft	0.00 fc	4.1 ft
10.0ft	0.00 fc	5.0 ft

■ Horiz. Spread: 28.0°

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:

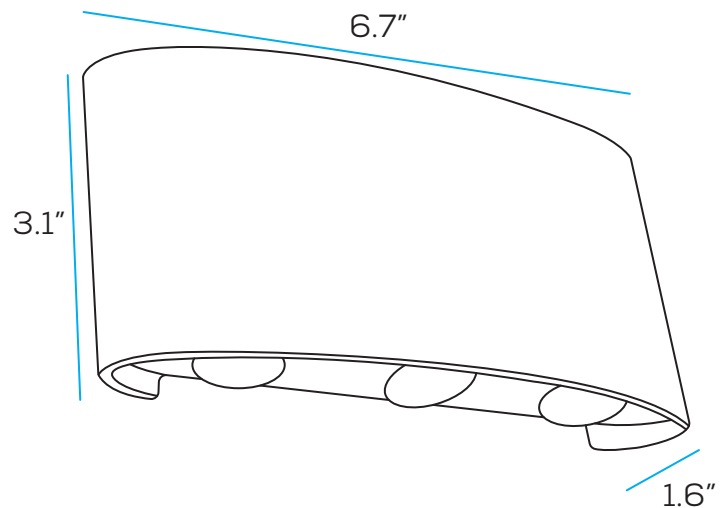



WL2204

LED CCT WALL SCONCE

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
<u>SES-WL2204-CCT-7</u> Example Model Number	<input checked="" type="checkbox"/> WL2204	<input checked="" type="checkbox"/> 2700K	<input checked="" type="checkbox"/> 7W	<input checked="" type="checkbox"/> 64.4°	<input checked="" type="checkbox"/> 100-240V
		<input checked="" type="checkbox"/> 3000K			
		<input checked="" type="checkbox"/> 4000K			
		<input checked="" type="checkbox"/> 5000K			
		<input checked="" type="checkbox"/> 6500K			
	SES	- WL2204 - Tunable	- 7W	- 64.4°	- 100-240V
Quantity	Fixture	CCT	Watts	Beam Angle	Voltage

Common Stock Models:

Item #	Model #
11459	SES-WL2204-02-CCT-7-BK