



# LWS1M | RGBW LINEAR WALL WASHER

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



<b>Size</b>	39.4" L x 2" W x 5" H	<b>Lumens</b>	2,880lm, 5,040lm
<b>Watts</b>	36W, 72W	<b>CCT</b>	RGBW
<b>Voltage</b>	100-277V	<b>IP Rating</b>	IP65
<b>Dimming</b>	Yes	<b>Materials</b>	Aluminum
<b>Beam Angle</b>	10°; 45°	<b>Finish</b>	Black, Silver
<b>CRI</b>	N/A	<b>Lens</b>	Clear
<b>PF</b>	>0.85	<b>Lifespan</b>	30,000 Hours

## OVERVIEW

- Tunable:** RGBW
- Applications:** IP65
- Efficacy:** 35-85lm/W
- Dimming:** Yes
- LED Type:** Osram 3535
- Operating Temp:** -40° to 113° F
- Operating Humidity:** 10%-90% RH
- Lifespan:** 30,000 Hours
- Warranty:** 3 Years
- Controller:** RF Remote

## FEATURES

- Control light with a remote control
- Easy to install and set up with an adjustable angle bracket

SARIN LED Linear Wall Washers offer bright and uniform lighting to any building with long-lasting LEDs. They come in a variety of color settings, produce high refresh rates for smooth transitional experiences, and include a built-in driver with overheat protection. These lights add eye-catching highlights to the exteriors of a structure, making them ideal for celebrations, honors, or festivity.

The housing is made of sleek, quality aluminum with optical covers that provide UV and weather resistances, ensuring that all units are safe outdoors. These wall washers can be controlled with a remote to achieve the user's perfect lighting scene.





LWSIM


# RGBW LINEAR WALL WASHER

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## PHOTOMETRICS:

### 36W

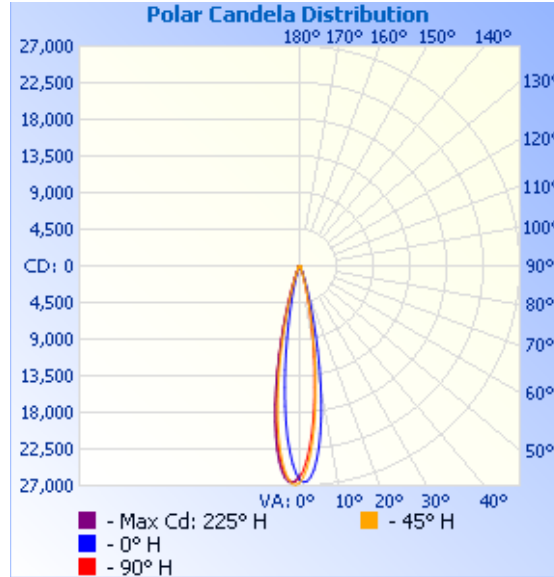



**Illuminance at a Distance**

	Center Beam fc	Beam Width	
4.3ft	1,418 fc	1.4 ft	1.5 ft
8.7ft	346 fc	2.9 ft	3.0 ft
13.0ft	155 fc	4.3 ft	4.4 ft
17.3ft	87.6 fc	5.8 ft	5.9 ft
21.7ft	55.7 fc	7.3 ft	7.4 ft
26.0ft	38.8 fc	8.7 ft	8.8 ft

■ Vert. Spread: 19.0°  
■ Horiz. Spread: 19.3°

## DIMENSIONS:

39.4"

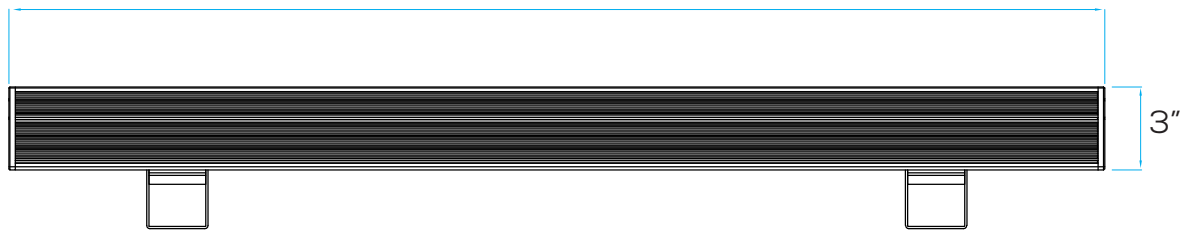



# LWS1M | RGBW LINEAR WALL WASHER

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\* Special Order/Not Commonly Stocked)

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> LWS1M	<input checked="" type="checkbox"/> RGBW	<input type="checkbox"/> 36W	<input checked="" type="checkbox"/> 10°	<input checked="" type="checkbox"/> 100-277V
		<input type="checkbox"/> 72W		

SES-LWS1M-RGBWR-36  
Example Model Number

**SES – LWS1M – RGBW – 10° – 100-277V**

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

### Common Stock Models:

Item #	Model #	Control System
10487	SES-LWS1M-RGBWR-36	Remote Control
10488	SES-LWS1M-RGBWR-72	Remote Control
11274	SES-LWS1M-RGBWR-72-Silver	Remote Control



Remote Control