



SDL

LED Slim Downlight With J-Box

Project: _____ Type: _____

Name: _____ Date: _____



OVERVIEW

Tunable: 2700K-5000K

Applications: Indoor IP44

Efficacy: 77-80lm/W

Dimming: Triac

LED Type: SMD 2835

Lens Type: Frosted

Operating Temp: -13F° to 122F°

Operating Humidity: 10-65%RH

Lifespan: 50,000 Hours

Warranty: 5 Years



Bronze



Black



Brushed Nickel

Size	SDL4: 4.9" x 4.9" x 0.8" SDL6: 6.9" x 6.9" x 0.8" SDL8: 8.9" x 8.9" x 0.8"
Watts	SDL4: 9W SDL6: 15W SDL8: 18W
Voltage	AC120V
Dimming	Triac
Beam Angle	120°
CRI	>80
PF	>0.9

Lumens	SDL4: 700lm SDL6: 1200lm SDL8: 1440lm
CCT	2700K - 3000K - 3500K - 4000K - 5000K
IP Rating	IP44
Materials	SDL4: Aluminum, Glass & PS SDL6: Aluminum, Glass & PS SDL8: Aluminum & PS
Finish	White
Lens	Frosted
Lifespan	50,000 Hours

SARIN LED SLIM DOWNLIGHTS remove the need for recessed cans, freeing up space for installation and hard-to-reach locations with a sleek and elegant look. This downlight is designed to reduce energy costs and maintenance intervals. The spring action clips and junction box eliminate the need for housing, making for easier installations.

These downlights are meant for indoor use but can be installed in wet locations such as kitchens and bathrooms, where humidity and splashes of water are common. Access to space above the ceiling is required for installation.

FEATURES

- Safe in wet locations where water and humidity may come into contact
- Adjustable Color Temperature from warm (2700K) to bright white (5000K)

ACCESSORIES

- Junction Box (J-Box) included
- Spring Action Clips fit securely into their corresponding openings

OPTIONAL ACCESSORIES

- Bronze Trim, Black Trim or Brushed Nickel Trim (4in & 6in)






SDL

**LED Slim
Downlight
With J-Box**

Project: _____ Type: _____


Name: _____ Date: _____

DIMENSIONS:

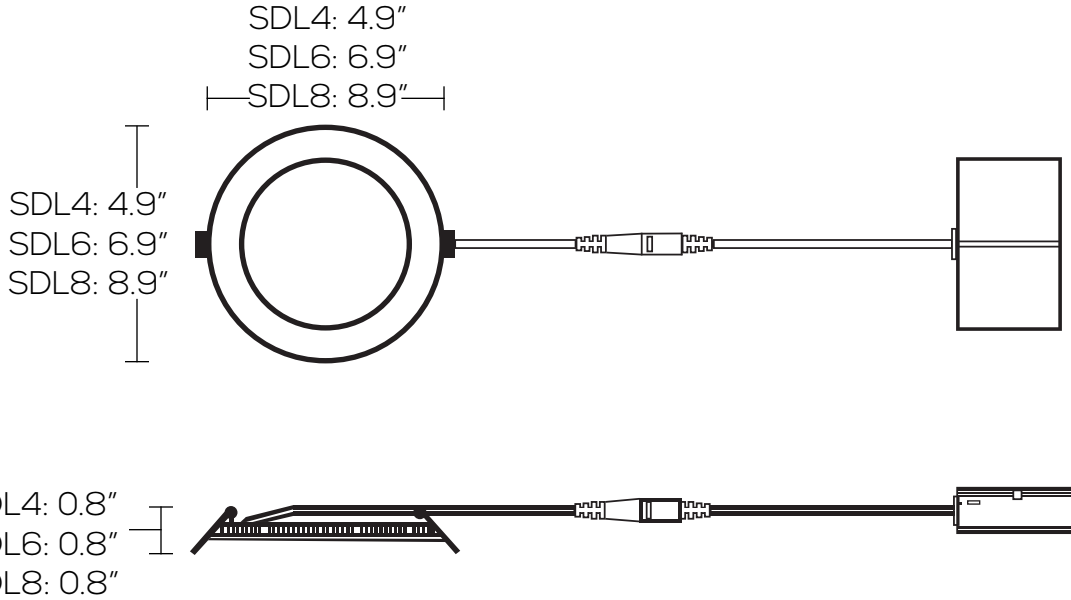

PHOTOMETRICS:

9W

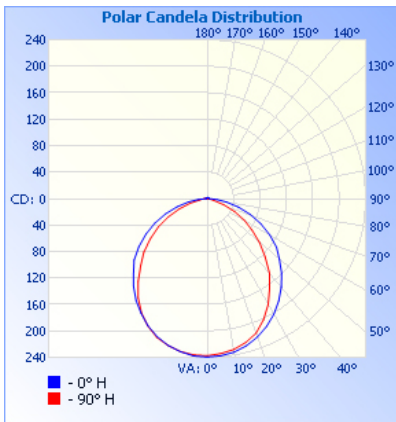


Illuminance at a Distance

Center Beam fc	Beam Width
1.7ft	82.8 fc 5.2 ft 3.9 ft
3.3ft	22.0 fc 10.2 ft 7.5 ft
5.0ft	9.57 fc 15.4 ft 11.4 ft
6.7ft	5.33 fc 20.6 ft 15.3 ft
8.3ft	3.47 fc 25.5 ft 18.9 ft
10.0ft	2.39 fc 30.8 ft 22.8 ft

■ Vert. Spread: 114.0°
■ Horiz. Spread: 97.4°

15W

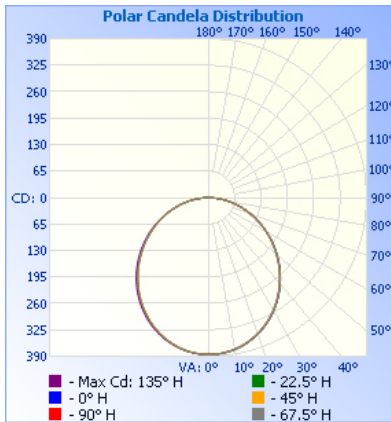


Illuminance at a Distance

Center Beam fc	Beam Width
1.7ft	133 fc 4.8 ft 4.8 ft
3.3ft	35.4 fc 9.3 ft 9.3 ft
5.0ft	15.4 fc 14.2 ft 14.1 ft
6.7ft	8.58 fc 19.0 ft 18.9 ft
8.3ft	5.59 fc 23.5 ft 23.4 ft
10.0ft	3.85 fc 28.3 ft 28.2 ft

■ Vert. Spread: 109.5°
■ Horiz. Spread: 109.3°

18W

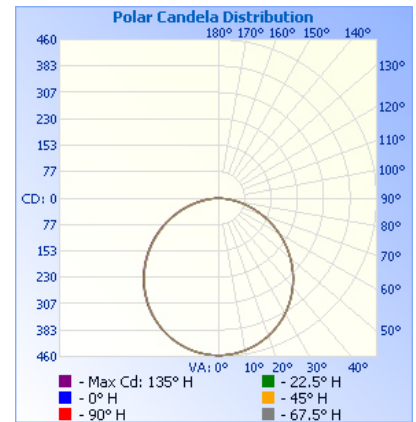

Illuminance at a Distance

Center Beam fc	Beam Width
1.7ft	158 fc 5.1 ft 5.1 ft
3.3ft	41.9 fc 9.9 ft 10.0 ft
5.0ft	18.2 fc 15.0 ft 15.1 ft
6.7ft	10.2 fc 20.2 ft 20.2 ft
8.3ft	6.62 fc 25.0 ft 25.1 ft
10.0ft	4.56 fc 30.1 ft 30.2 ft

■ Vert. Spread: 112.8°
■ Horiz. Spread: 113.0°



SDL

LED Slim Downlight With J-Box

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(* Special Order/Not Commonly Stocked)

Custom Model Assembly

SES-SDL4-03-CCT-9
Example Model Number

- | | | | |
|-------------------------------|---|------------------------------|---|
| Fixture | CCT | Watts | Trim |
| <input type="checkbox"/> SDL4 | <input checked="" type="checkbox"/> Tunable | <input type="checkbox"/> 9W | <input checked="" type="checkbox"/> White |
| <input type="checkbox"/> SDL6 | | <input type="checkbox"/> 15W | <input type="checkbox"/> Bronze |
| <input type="checkbox"/> SDL8 | | <input type="checkbox"/> 18W | <input type="checkbox"/> Black |
| | | | <input type="checkbox"/> Nickel |

SES - - CCT - -

Quantity

Fixture

CCT

Watts

Trim

Common Stock Models:

Optional Accessories:

Item #	Model #
11386	SES-SDL4-03-CCT-9
11438	SES-SDL6-03-CCT-15
11460	SES-SDL8-03-CCT-18

4" Item #	6" Item #
-----------	-----------



Bronze

40192-A

40193-A



Black

40192-B

40193-B



Brushed Nickel

40192-C

40193-C