




LA02C CCT LINEAR STRIP LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

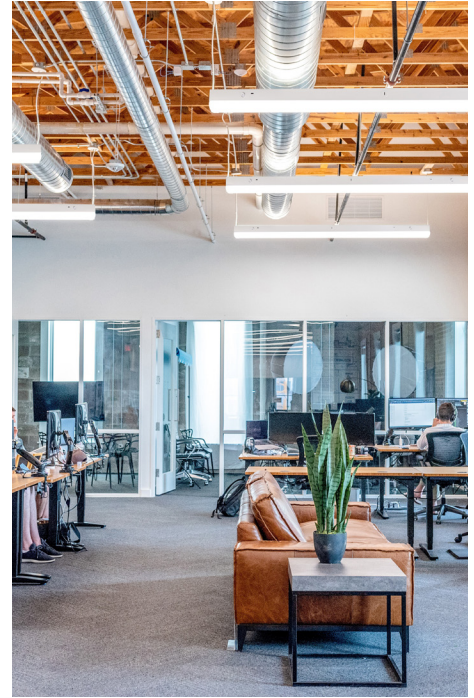

Size	20W 2.4x2.7x24 40W 2.4x2.7x48 70W 2.4x2.7x96
Wattage	20W 20W/30W/40W 50W/60W/70W
Voltage	120-277VAC
Dimming	0-10V
Beam Angle	130°
CRI	>80
PF	≥ 0.9

Lumens	20W 2,500-2,840lm 40W 4,800-5,500lm 70W 8,750-9,450lm
CCT	3000K-3500K- 4000K- 5000K
IP Rating	Damp (IP4X)
Materials	Iron
Finish	White
Lens	Clear
Lifespan	50,000 Hours

OVERVIEW

- Tunable:** 3000K-5000K
- Applications:** Damp (IP4X)
- Efficacy:** 125-135lm/W
- Dimming:** 0-10V dimming
- LED Type:** Lumileds 2835
- Lens Type:** Clear
- Driver: 40W:** LH-040LA-S90SVPC
- 70W:** LH-070LA-S135SVPC
- Operating Temp:** -22° to 113° F without motion sensor & emergency back up; -4 to 113° F with motion sensor and emergency back up; 32° to 113° F with motion sensor
- Operating Humidity:** 20%-90%RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

FEATURES

- Includes wiring box cover & screws
- Optional Accessories: DC Motion Sensor, Emergency Power Supply
- Mounting Options: Ceiling mount, pendant mount, cable mount, chain mount

SARIN LED Adjustable CCT Linear Strips are commonly used to replace fluorescent lights in work areas. In addition to tunable color temperatures, the 4' and 8' models also allow you to switch between three wattage settings.


Not only can these be surface mounted but they also look great when suspended. LED Wraparounds are perfect for offices, garages, auto body shops, and car dealerships.





PHOTOMETRICS:

X° Beam Angle: (Polar Candela Dist.)

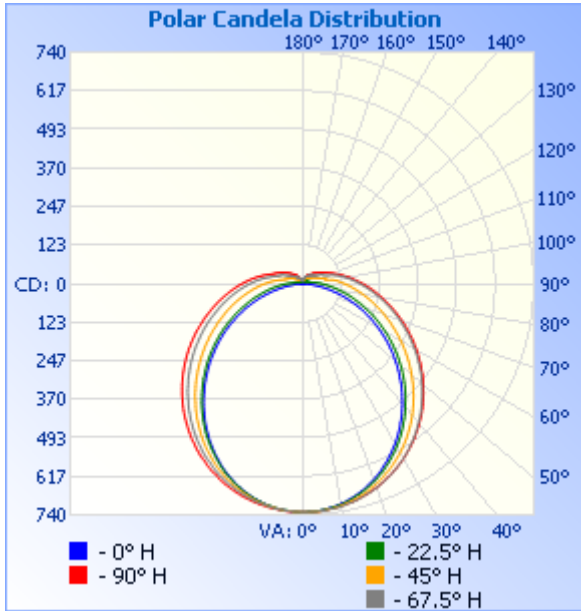


Light Distance: (Illuminance at a Distance)

	Center Beam fc	Beam Width	
2.5ft	117 fc	6.4 ft	11.4 ft
5.0ft	29.2 fc	12.7 ft	22.9 ft
7.5ft	13.0 fc	19.1 ft	34.3 ft
10.0ft	7.31 fc	25.5 ft	45.7 ft
12.5ft	4.68 fc	31.8 ft	57.1 ft
15.0ft	3.25 fc	38.2 ft	68.6 ft

■ Vert. Spread: 103.7°
■ Horiz. Spread: 132.7°

DIMENSIONS:

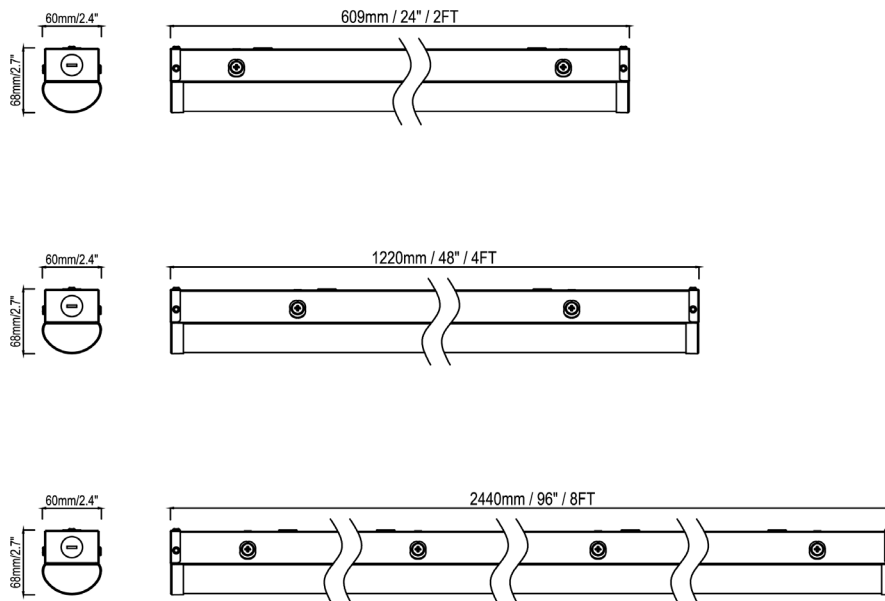



LA02C

CCT LINEAR STRIP LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Voltage
	<input checked="" type="checkbox"/> LA02C	<input checked="" type="checkbox"/> Tunable	<input type="checkbox"/> 20W (2FT)	<input checked="" type="checkbox"/> 120-277V
			<input type="checkbox"/> 20W / 30W / 40W (4FT)	
			<input type="checkbox"/> 50W / 60W / 70W (FT)	

SES-LA02C-CCT-LW
Example Model Number

SES – LA02C – Tunable –

–120-277V

Quantity	Fixture	CCT	Watts	Voltage
-----------------	----------------	------------	--------------	----------------

Common Stock Models:

Item #	Model #
11452	SES-LA02C-CCT-20W
11371	SES-LA02C-CCT-LW
11372	SES-LA02C-CCT-HW

Optional Accessories:

Item #	Model #	QTY
13044	SES-LA01C-CHAIN	
13046	SES-LA02C-SURFACE	
13047	SES-LA02C-SUSPENDED	
11373	BLD-CM20H-1500400 (Emergency Driver)	
13048	SES-HB001VCR (Microwave Sensor)	
13049	SES-HB03DPR-LA02C (PIR Sensor)	



13044



13046



13047



11373



13048



13049