




LA02C

EMERGENCY LINEAR STRIP LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

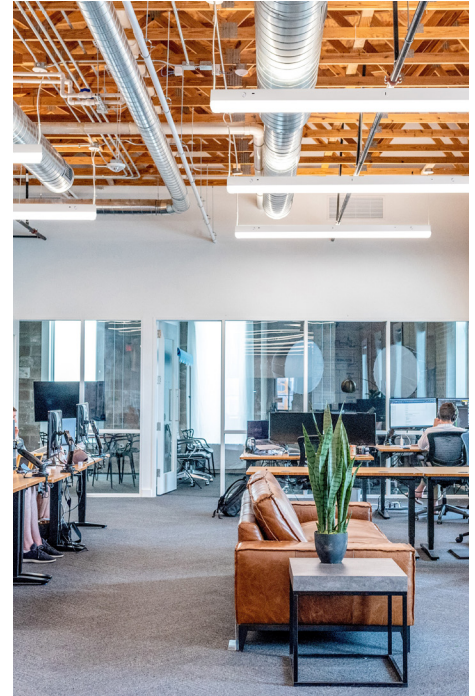

Size	40W 2.4x2.7x48 70W 2.4x2.7x96	Lumens	40W 4,880-5,280lm 70W 9,200-9,600lm
Wattage	20W/30W/40W 50W/60W/70W	CCT	3000K-3500K- 4000K- 5000K
Voltage	120-277VAC	IP Rating	Damp (IP4X)
Dimming	0-10V	Materials	Iron
Beam Angle	130°	Finish	White
CRI	>80	Lens	Clear
PF	≥ 0.9	Lifespan	50,000 Hours

OVERVIEW

- Tunable:** 3000K-5000K
- Applications:** Damp (IP4X)
- Efficacy:** 125-135lm/W
- Dimming:** 0-10V dimming
- LED Type:** Lumileds 2835
- Lens Type:** Clear
- Driver: 40W:** LH-040LA-S90SVPC
70W: LH-070LA-S135SVPC
- Operating Temp:** -32° to 104°F
- Operating Humidity:** 20%-90%RH
- Lifespan:** 50,000 Hours
- Warranty:** 5 Years

SARIN LED Adjustable CCT Linear Strips are commonly used to replace fluorescent lights in work areas. In addition to tunable color temperatures, the 4' and 8' models also allow you to switch between three wattage settings. The integrated emergency backup provides light for up to 90 minutes in the event of a power outage.

Not only can these be surface mounted but they also look great when suspended. LED Wraparounds are perfect for offices, garages, auto body shops, and car dealerships.

FEATURES

- Integrated Emergency Backup
- Optional Accessories: PIR and Microwave Motion Sensors
- Mounting Options: Ceiling mount, pendant mount, cable mount, chain mount





LA02C

EMERGENCY LINEAR STRIP LIGHT


Project: _____ Type: _____

Name: _____ Date: _____

PHOTOMETRICS:

X° Beam Angle: (Polar Candela Dist.)

Light Distance: (Illuminance at a Distance)

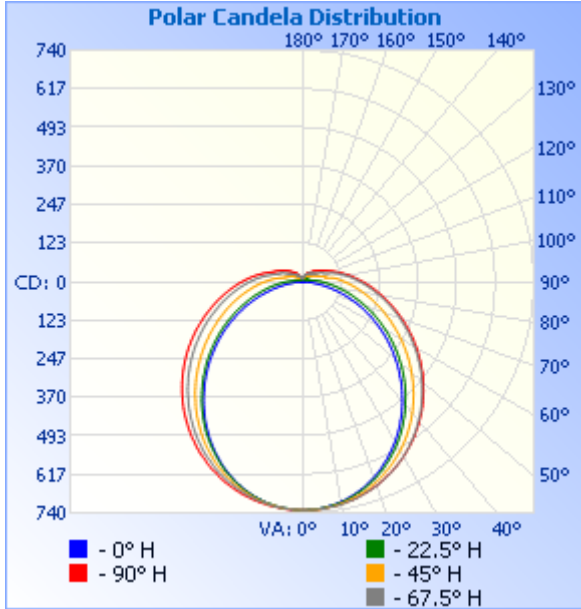


Illuminance at a Distance

	Center Beam fc	Beam Width	
2.5ft	117 fc	6.4 ft	11.4 ft
5.0ft	29.2 fc	12.7 ft	22.9 ft
7.5ft	13.0 fc	19.1 ft	34.3 ft
10.0ft	7.31 fc	25.5 ft	45.7 ft
12.5ft	4.68 fc	31.8 ft	57.1 ft
15.0ft	3.25 fc	38.2 ft	68.6 ft

■ Vert. Spread: 103.7°
■ Horiz. Spread: 132.7°

DIMENSIONS:

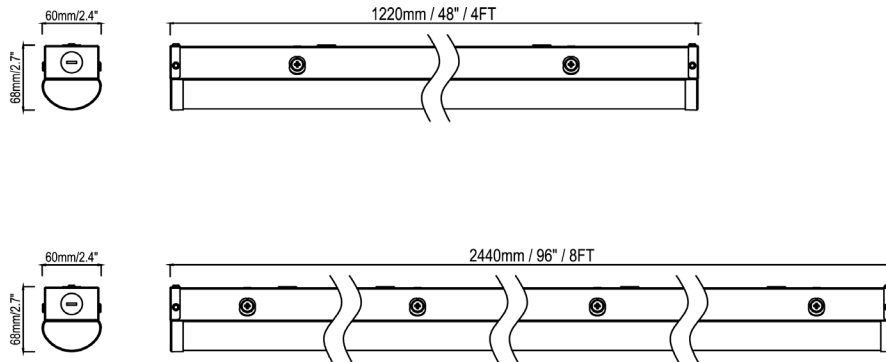



LA02C

EMERGENCY LINEAR STRIP LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(* Special Order/Not Commonly Stocked)

Custom Model Assembly

Fixture

LA02C

CCT

Tunable

Watts

20W / 30W / 40W (4FT)

50W / 60W / 70W (FT)

Voltage

120-277V

SES-LA02C-70/60/50-3/35/4/5K-EM
Example Model Number

SES – LA02C – Tunable –

–120-277V

Quantity

Fixture

CCT

Watts

Voltage

Common Stock Models:

Item #	Model #
11457	SES-LA02C-40/30/20-3/35/4/5K-EM
11458	SES-LA02C-70/60/50-3/35/4/5K-EM

Optional Accessories:

Item #	Model #	QTY
13044	SES-LA01C-CHAIN	
13046	SES-LA02C-SURFACE	
13047	SES-LA02C-SUSPENDED	
13048	SES-HB001VCR (Microwave Sensor)	
13049	SES-HB03DPR-LA02C (PIR Sensor)	



13044



13046



13047



13048



13049