




# LWSIM | LINEAR WALL WASHER

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

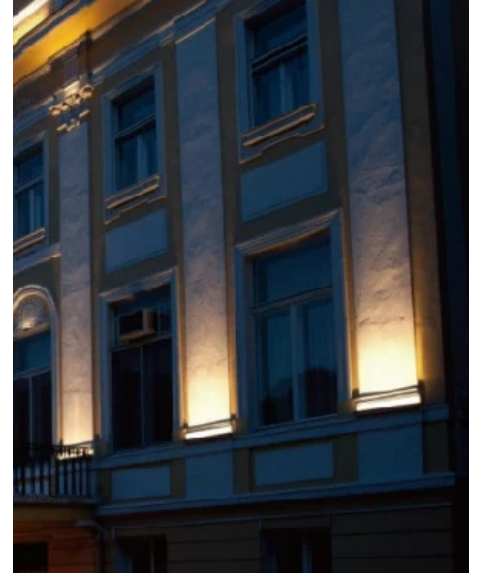

<b>Size</b>	39.4" L x 2" W x 5.1" H	<b>Lumens</b>	3,600lm
<b>Watts</b>	36W	<b>CCT</b>	3000K, 5000K
<b>Voltage</b>	100-277V	<b>IP Rating</b>	IP65
<b>Dimming</b>	No	<b>Materials</b>	Aluminum
<b>Beam Angle</b>	45°	<b>Finish</b>	Black
<b>CRI</b>	80	<b>Lens</b>	Clear
<b>PF</b>	0.9	<b>Lifespan</b>	30,000 Hours

## OVERVIEW

**Tunable:** 3000K, 5000K

**Applications:** IP65

**Efficacy:** 100lm/W

**Dimming:** No

**LED Type:** CREE

**Operating Temp:** -40° to 113° F

**Operating Humidity:** 10%-65% RH

**Lifespan:** 30,000 Hours

**Warranty:** 3 Years

## FEATURES

- Easy to install and set up with an adjustable angle bracket

SARIN LED Linear Wall Washers offer bright and uniform lighting to any building with long-lasting LEDs. They produce high refresh rates for smooth transitional experiences, and include a built-in driver with overheat protection. These lights add eye-catching highlights to the exteriors of a structure.


The housing is made of sleek, quality aluminum with optical covers that provide UV and weather resistances, ensuring that all units are safe outdoors.





### PHOTOMETRICS:

36W

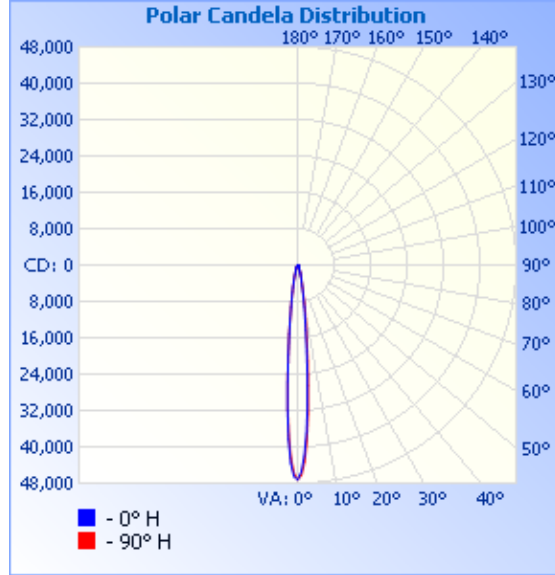

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
5.0ft	1,888 fc	0.9 ft	1.0 ft
10.0ft	472 fc	1.9 ft	1.9 ft
15.0ft	210 fc	2.8 ft	2.9 ft
20.0ft	118 fc	3.7 ft	3.9 ft
25.0ft	75.5 fc	4.6 ft	4.8 ft
30.0ft	52.4 fc	5.6 ft	5.8 ft

■ Vert. Spread: 10.6°  
■ Horiz. Spread: 11.0°

### DIMENSIONS:

39.4"

