



# 36R- P28 | TEMPERED GLASS FRAMED LIGHTED MIRROR

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_



<b>Size</b>	36" W x 36" H x 1.3" D
<b>Watts</b>	30W
<b>Voltage</b>	100-120V
<b>Dimming</b>	Non-Dimming
<b>Beam Angle</b>	120°
<b>CRI</b>	>80
<b>PF</b>	≥ 0.9

<b>Lumens</b>	3,300lm
<b>CCT</b>	2700K-4500K-6500K
<b>IP Rating</b>	IP44
<b>Materials</b>	Aluminum, Tempered Mirror
<b>Finish</b>	Matte Black, Matte Gold
<b>Lens</b>	Frosted
<b>Lifespan</b>	50,000 Hours

## OVERVIEW

**CCT:** Tunable  
**Applications:** I44  
**Efficacy:** 110lm/W  
**Dimming:** Non-Dimming  
**LED Type:** SMD2835  
**Lens Type:** Frosted  
**Driver:** SNAPPY 50W  
**Operating Temp:** up to 113F°  
**Operating Humidity:** 10%-65% RH  
**Lifespan:** 50,000 Hours  
**Warranty:** 3 Years

## FEATURES

- 4mm Tempered Glass Mirror
- Automatic Defogger
- Copper-Free, Anti-Corrosion
- Touch On / Off CCT Adjustable Control and Dimmer
- Safety-Backed, Anti-Shatter
- High Energy Efficiency



SARIN Tempered Glass Framed Lighted Mirrors are widely used as a functional decoration for restrooms in residential and commercial spaces. Available with a frosted lens, this mirror can switch between three color temperatures. What sets this mirror apart from traditional mirrors is the tempered glass. Tempered glass offers a whole new level of security versus standard glass mirrors, offering impeccable durability and peace of mind when it comes to shipping and handling.

There is a heater behind the glass to prevent fog and a switch in the middle of the mirror. This fixture includes a strap but can also be surface mounted. Mirrors are available in two finish options: Matte Black and Matte Gold.




# 36R- P28 | TEMPERED GLASS FRAMED LIGHTED MIRROR

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## DIMENSIONS:

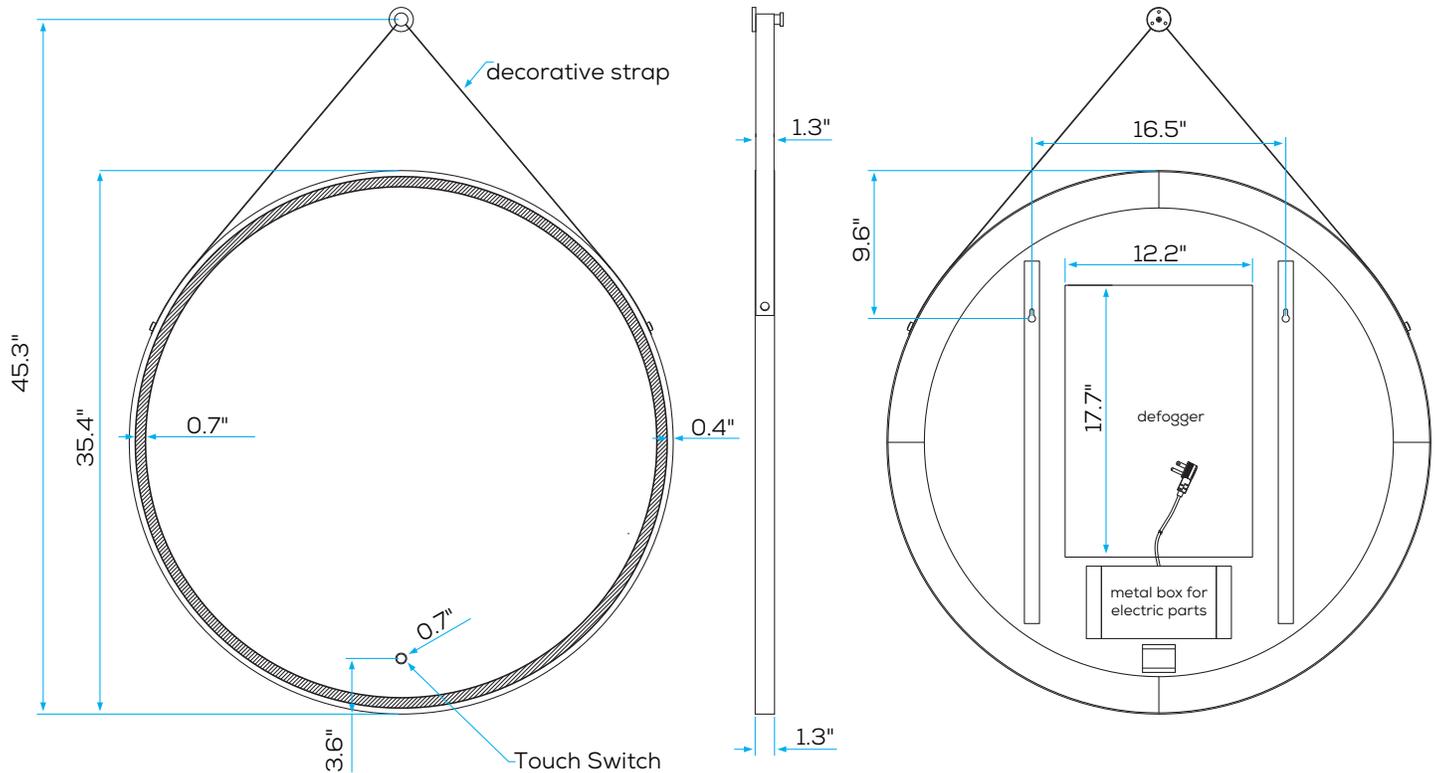

## IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.



# 36R- P28 | TEMPERED GLASS FRAMED LIGHTED MIRROR

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Name: \_\_\_\_\_ Date: \_\_\_\_\_

## ORDER FORM:

(\*) Special Order/Not Commonly Stocked

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
<input checked="" type="checkbox"/> 36R-P28	<input checked="" type="checkbox"/> Tunable	<input checked="" type="checkbox"/> 30W	<input checked="" type="checkbox"/> 120°	<input checked="" type="checkbox"/> 100-120V

SES-36R-P28-MB  
Example Model Number

**SES - 36R-P28 - Tunable - 30W - 120° - 100-120V**

Quantity

Fixture

CCT

Watts

Beam Angle

Voltage

### Common Stock Models:

Item #	Model #
11363	SES-36R-P28-MB
11364	SES-36R-P28-MG