



TP

LED TRI-PROOF
LIGHT

Project: _____ Type: _____

Name: _____ Date: _____



Size	3.3" W x 3.1" H x 4'/5' L	Lumens	5,480lm, 7,500lm, 10,400lm
Watts	40W, 60W	CCT	5000K
Voltage	100-277V	IP Rating	IP65
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	120°	Finish	White
CRI	>80	Lens	Frosted
PF	≥ 0.9	Lifespan	50,000 Hours

OVERVIEW

Tunable: 5000K**Applications:** IP65**Efficacy:** 125-137lm/W**Dimming:** 1-10V**LED Type:** SMD 2835 (0.2W)**Lens Type:** Clear**Driver:** Lifud LF-GLD065YS1400U**Operating Temp:** -40° to 113° F**Operating Humidity:** 10%-90% RH**Lifespan:** 50,000 Hours**Warranty:** 5 Years

FEATURES

- Tri-Proof lights are dust proof, shock proof, and water proof
- Protected from the elements with an IP65 rating, making it suitable for rainy environments



SARIN LED Tri-Proof Lights replace traditional fluorescent bulbs with energy efficient LEDs. These tubes are safe for outdoor use and protected from rain, snow, and weak jets of water, such as sprinklers.

LED Tri-Proof Lights are perfect for warehouses, factories, workshops, supermarkets and schools. These fixtures are suitable for a variety of applications and will provide significant energy savings.



TP


LED TRI-PROOF LIGHT

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:

40W

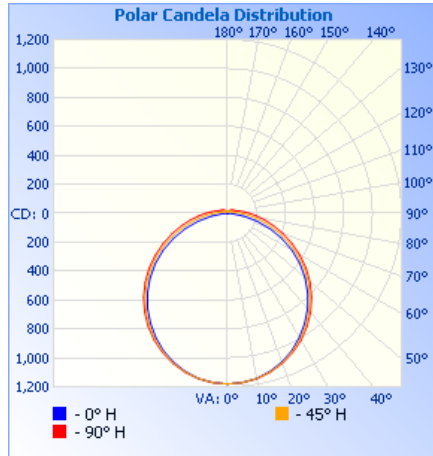

60W

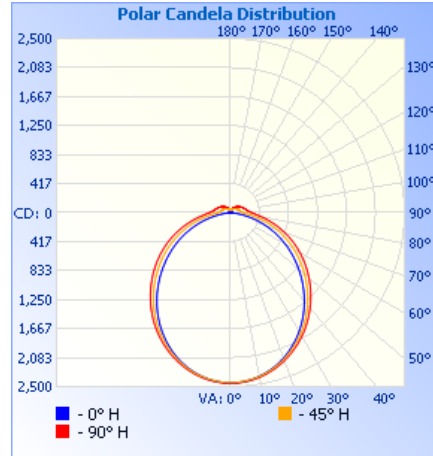


Illuminance at a Distance	
Center Beam fc	Beam Width
2.5ft	189 fc
5.0ft	47.2 fc
7.5ft	21.0 fc
10.0ft	11.8 fc
12.5ft	7.55 fc
15.0ft	5.24 fc



Illuminance at a Distance	
Center Beam fc	Beam Width
2.5ft	391 fc
5.0ft	97.6 fc
7.5ft	43.4 fc
10.0ft	24.4 fc
12.5ft	15.6 fc
15.0ft	10.8 fc

DIMENSIONS:

TOP

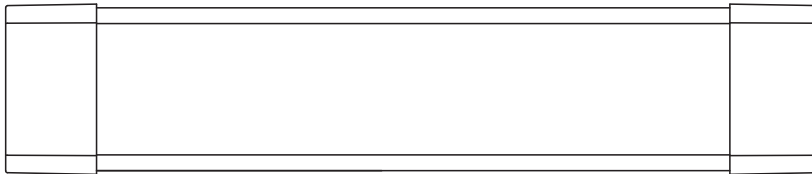

SIDE

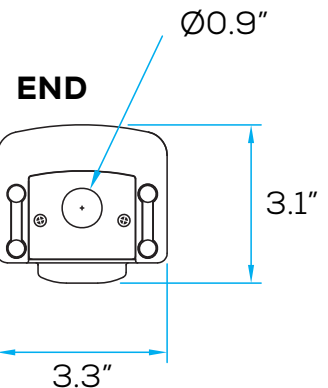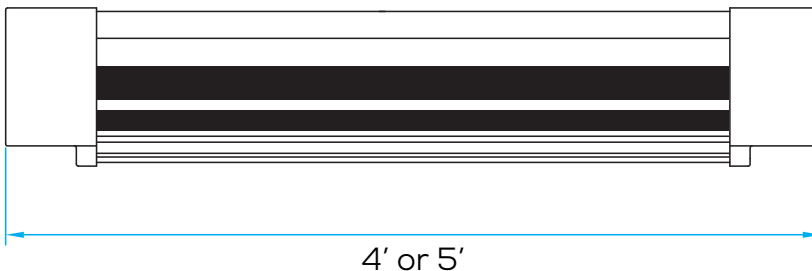



TP

LED TRI-PROOF
LIGHT

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage
	<input checked="" type="checkbox"/> TP	<input type="checkbox"/> 4000K	<input type="checkbox"/> 40W	<input checked="" type="checkbox"/> 120°	<input checked="" type="checkbox"/> 100-277V
		<input type="checkbox"/> 5000K	<input type="checkbox"/> 60W		

SES-TP5FT-5000-60
Example Model Number

Quantity **SES** **TP** **5000K** **120°** **100-277V**

Fixture CCT Watts Beam Angle Voltage

Common Stock Models:

Item #	Model #
10129	SES-TP5FT-5000-60 (5 Ft)
10172	SES-TP12-5000-40 (4 Ft)
30172	SES-TP4FTD-4000-40-FROSTED
30173	SES-TP4FT-5000-40-STRIPED
30174	SES-TP4FT-5000-40-FROSTED
30175	SES-TP4FT-5000-40- EM

