




T8IN

LED Integrated Tube Light

Project: _____ Type: _____

Name: _____ Date: _____

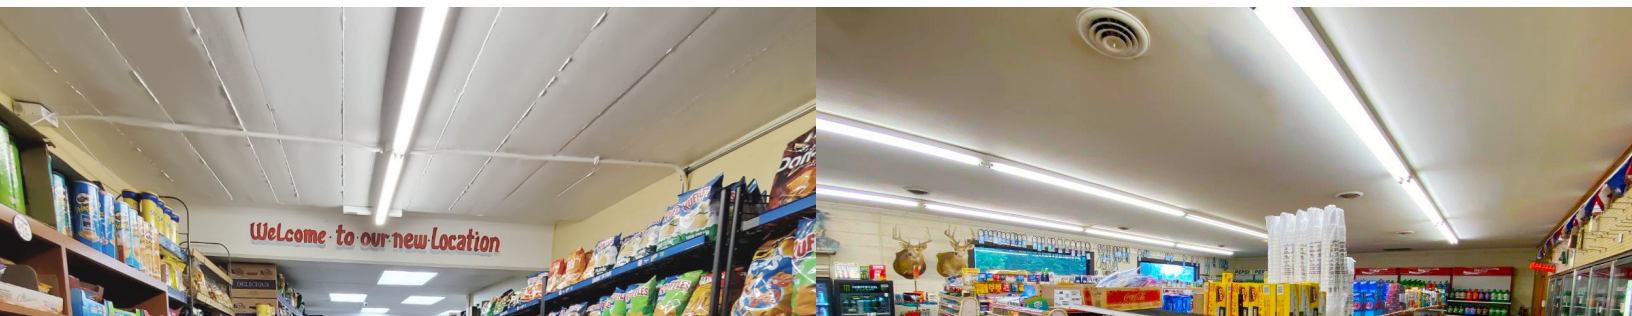

OVERVIEW

Applications: Indoor (IP20)

Efficacy: 120-130lm/W

Dimming: Non-Dimming

LED Type: SMD2835

Driver: Zenith/ZS Series

Operating Temp: -68°F to 104°F

Operating Humidity: <20% RH

Lifespan: 50,000 hours

Warranty: 5 years



Size	2' x 15" x 15" 3' x 15" x 15" 4' x 15" x 15" 8' x 15" x 15"	Lumens	1200-7500lm
Watts	10W, 15W, 22W, 60W	CCT	3000K, 4000K, 5000K, 6500K
Voltage	AC100-250V	IP Rating	IP20
Dimming	Non-Dimming	Materials	Aluminum, PC
Beam Angle	120°	Finish	White
CRI	>80	Lens	Frosted, Striped, Clear
PF	>0.9	Lifespan	50,000 hrs

FEATURES

- 70% electrical savings when replacing fluorescent lights
- Linkable integrated fixture connects up to (8) tubes directly to one another
- High quality 6063-T5 Aluminum maximizes LED life
- Ultra-bright, high-output LEDs

ACCESSORIES

- (2) Screws
- (2) Anchors
- (2) Clips
- 7" Power Cord
- 9" or 10' Link Cable (Optional)

SARIN LED INTEGRATED TUBE LIGHTS replace low voltage, halogen, and fluorescent light bulbs. They are built to provide an energy savings of up to 70% and easy adaption for retrofitting old lighting systems.

SARIN LED INTEGRATED TUBE LIGHTS are perfect for interior lighting in offices, schools, parking garages, warehouses and any place with high ceilings, delivering efficient and long-lasting illumination, as well as sustainable LED brilliance.

These lights connect directly to the line source, eliminating the need for ballasts altogether. Each unit can be connected to each other, either directly up to 24 feet or with the optional link cable for spacing options. Intended for indoor use.





T8IN


LED Integrated Tube Light

Project: _____ Type: _____


Name: _____ Date: _____

PHOTOMETRICS:


2ft:

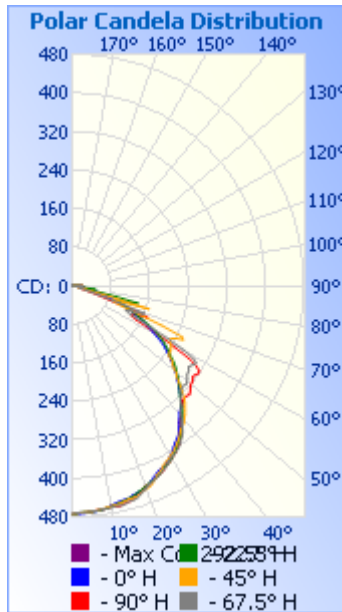

4ft:

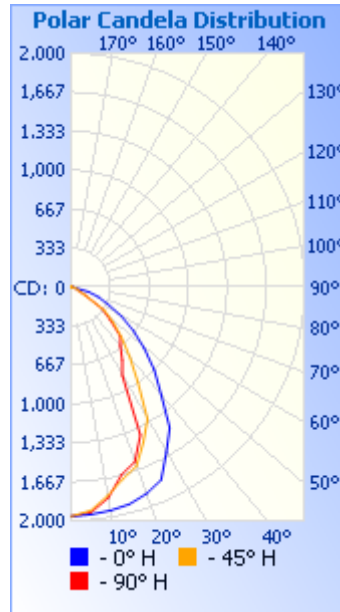

8ft:

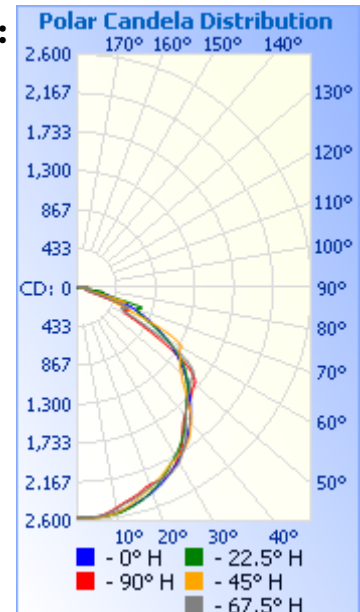

2ft:

Illuminance at a Distance

	Center Beam fc	Beam Width
2.5ft	75.5 fc	7.2 ft 8.3 ft
5.0ft	18.9 fc	14.4 ft 16.5 ft
7.5ft	8.39 fc	21.6 ft 24.8 ft
10.0ft	4.72 fc	28.8 ft 33.1 ft
12.5ft	3.02 fc	36.0 ft 41.4 ft
15.0ft	2.10 fc	43.2 ft 49.6 ft

■ Vert. Spread: 110.4°
■ Horiz. Spread: 117.7°

4ft:

Illuminance at a Distance

	Center Beam fc	Beam Width
2.5ft	138 fc	6.2 ft 10.8 ft
5.0ft	34.5 fc	12.3 ft 21.7 ft
7.5ft	15.3 fc	18.5 ft 32.5 ft
10.0ft	8.63 fc	24.7 ft 43.4 ft
12.5ft	5.53 fc	30.9 ft 54.2 ft
15.0ft	3.84 fc	37.0 ft 65.1 ft

■ Vert. Spread: 102.0°
■ Horiz. Spread: 130.5°



8ft:

Illuminance at a Distance

	Center Beam fc	Beam Width
2.5ft	411 fc	7.8 ft 7.8 ft
5.0ft	103 fc	15.6 ft 15.7 ft
7.5ft	45.7 fc	23.4 ft 23.5 ft
10.0ft	25.7 fc	31.2 ft 31.4 ft
12.5ft	16.5 fc	38.9 ft 39.2 ft
15.0ft	11.4 fc	46.7 ft 47.1 ft

■ Vert. Spread: 114.6°
■ Horiz. Spread: 115.0°

DIMENSIONS:

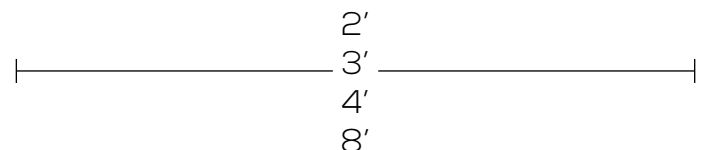



T8IN

LED Integrated Tube Light

Project: _____ Type: _____

Name: _____ Date: _____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

SES-T8IN4FT-4000-22-FR
Example Model Number

Fixture	CCT	Watts	Lens
☐ T8IN2FT	☐ 3000K	☐ 10W	☐ Frosted
☐ T8IN3FT*	☐ 4000K	☐ 15W	☐ Striped
☐ T8IN4FT	☐ 5000K	☐ 22W	☐ Clear
☐ T8IN8FT	☐ 6500K	☐ 60W	

Quantity	SES	Fixture	CCT	Watts	Lens
----------	-----	---------	-----	-------	------

Common Stock Models:

Item #	Model #	Item #	Model #
10159	SES-T2INT-6500-10-CL	10157	T-INT-4FT-22W-5000K-FR
11101	SES-T82FTIN-3000-10-FR	10151	SES-T8IN4FT-5000-22-CL
11102	SES-T82FTIN-4000-10-FR	10153	SES-T8IN8FM-4000-60-FR
11103	SES-T83FTIN-3000-15-FR	30167	SES-T8IN8FT-4000-60-ST
11104	SES-T83FTIN-4000-15-FR	10150	SES-T8IN8FT-5000-60-CL
10146	SES-T8IN2FT-5000-10-ST	10152	SES-T8IN8FT-5000-60-ST
10145	SES-T8IN4FT-3000-22-FR	10154	TL-INT-8FT-60W-5000K-FR
10149	SES-T8IN4FT-4000-22-FR		

Accessories:

40145-D



7" Power Cord

40145-C



9" Link Cable

40145-K



10' Link Cable



(2) Clips (2) Anchors (2) Screws

(included)