
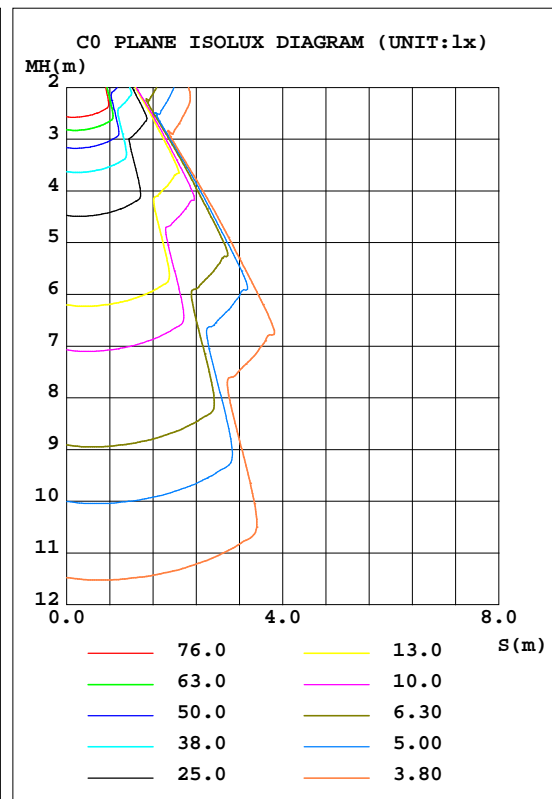


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 31.62 lm/W			
MODEL	--	I _{max} (cd)	509.7	S/MH(C0/180)	0.31
NOMINAL POWER(W)	--	LOR(%)	100.0	S/MH(C90/270)	0.92
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	444.21	η UP, DN(C0-180)	0.7,56.6
NOMINAL FLUX(lm)	444.21	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.5,42.2
LAMPS INSIDE	1	η up(%)	1.2	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	--	η down(%)	98.8	CIBSE SHR MAX	1.00

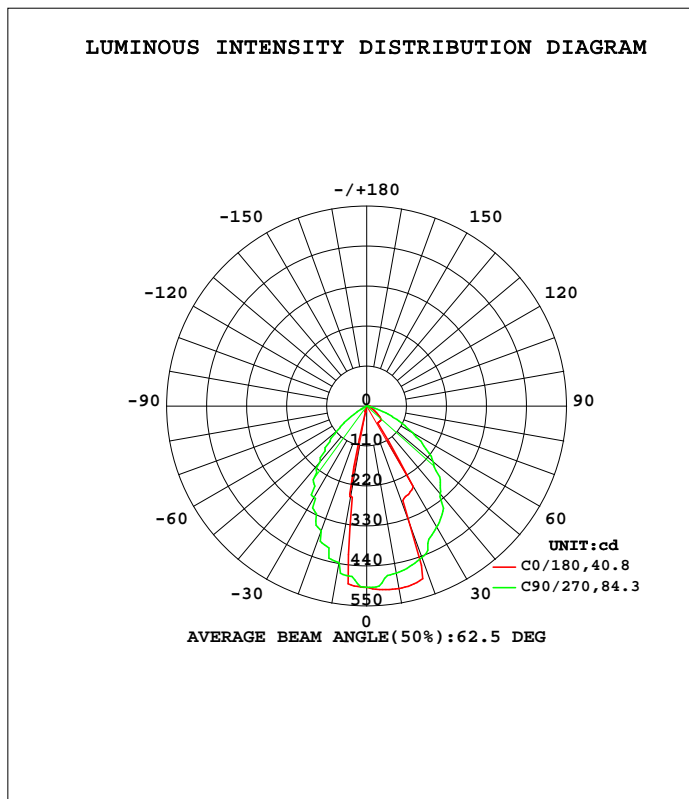

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	509.7	479.5	466.8	242.4	252.6	457.8	438.7	477.7	0- 10	44.39	44.39	9.99,9.99
20	347.7	468.9	443.7	16.18	13.28	14.34	365.5	438.8	10- 20	94.37	138.8	31.2,31.2
30	255.9	244.9	385.0	2.964	0.0126	3.973	289.4	226.8	20- 30	101.1	239.9	54.54
40	55.47	203.6	315.8	0.5637	0.0007	0.0082	198.8	197.4	30- 40	81.76	321.7	72.4,72.4
50	48.53	42.03	239.0	0.3809	0.0015	0.0007	112.4	35.85	40- 50	57.62	379.3	85.4,85.4
60	24.22	31.30	147.0	0.2296	0.0007	0	19.17	28.23	50- 60	36.55	415.8	93.6,93.6
70	12.50	14.39	56.57	0.1547	0.0067	0.0022	0.0776	12.93	60- 70	14.92	430.7	97,97
80	7.100	7.041	4.714	0.1048	0.0224	0.0134	0.0373	5.684	70- 80	5.827	436.6	98.3,98.3
90	4.818	3.977	0.8907	0.0733	0.0520	0.0387	0.0888	2.935	80- 90	2.324	438.9	98.8,98.8
100	3.779	2.716	0.1782	0.0746	0.0794	0.1151	0.1746	2.101	90-100	1.475	440.4	99.1,99.1
110	2.611	1.837	0.0320	0.1411	0.1054	0.2991	0.2709	1.183	100-110	1.028	441.4	99.4,99.4
120	1.744	1.301	0.0723	0.2635	0.2725	0.5780	0.3586	0.9247	110-120	0.7583	442.2	99.5,99.5
130	1.085	0.8571	0.1229	0.4363	0.5598	0.8943	0.4445	0.6829	120-130	0.5902	442.8	99.7,99.7
140	0.6096	0.5026	0.1886	0.6267	0.8681	1.158	0.5175	0.5365	130-140	0.4877	443.2	99.8,99.8
150	0.3927	0.4006	0.2637	0.7083	1.115	1.197	0.5696	0.5511	140-150	0.4057	443.6	99.9,99.9
160	0.5755	0.4497	0.3541	0.6762	1.073	1.037	0.5793	0.6958	150-160	0.3123	444.0	99.9,99.9
170	0.8008	0.4296	0.4428	0.6643	0.9047	0.8398	0.5606	0.7051	160-170	0.1917	444.1	100,100
180	0.8750	0.6076	0.5219	0.6672	0.8773	0.6121	0.5226	0.6672	170-180	0.0629	444.2	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

Conical surface Flux(90deg): 354.99 lm

%lum = 79.9%
 %lamp = 79.9%

Conical surface Flux(120deg): 415.83 lm


%lum = 93.6%
 %lamp = 93.6%

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

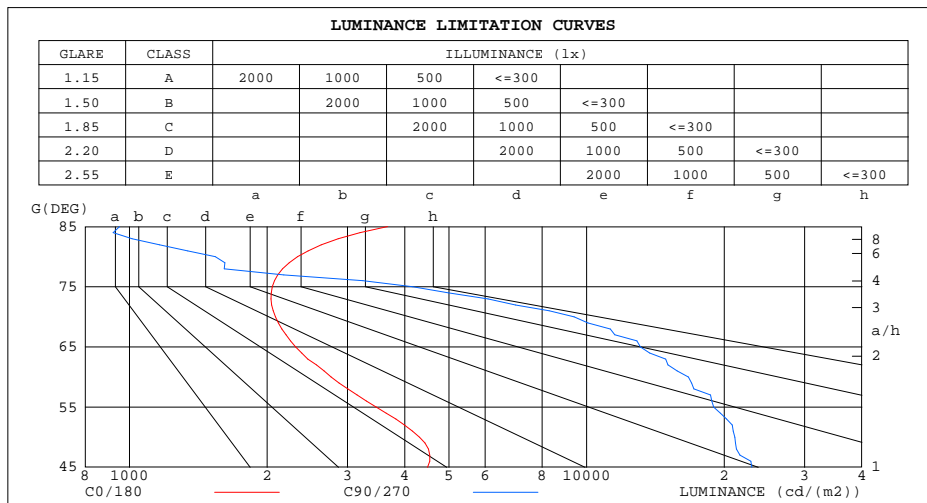


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.99
1.0	1.08	1.05	1.03	1.06	1.03	1.01	1.02	.90	.98	.98	.96	.95	.94	.93	.92	.90
2.0	.99	.94	.90	.97	.93	.89	.94	.90	.87	.90	.87	.85	.87	.85	.83	.81
3.0	.91	.85	.80	.89	.84	.79	.86	.81	.78	.83	.80	.76	.81	.78	.75	.73
4.0	.83	.77	.72	.82	.76	.71	.80	.74	.70	.77	.73	.69	.75	.71	.68	.66
5.0	.77	.70	.65	.76	.69	.65	.74	.68	.64	.72	.67	.63	.70	.66	.62	.61
6.0	.71	.64	.59	.70	.64	.59	.69	.63	.59	.67	.62	.58	.65	.61	.57	.56
7.0	.66	.59	.55	.66	.59	.54	.64	.58	.54	.63	.57	.54	.61	.57	.53	.52
8.0	.62	.55	.50	.61	.55	.50	.60	.54	.50	.59	.54	.50	.58	.53	.49	.48
9.0	.58	.51	.47	.58	.51	.47	.56	.51	.47	.55	.50	.46	.54	.50	.46	.45
10.0	.55	.48	.44	.54	.48	.44	.53	.48	.44	.52	.47	.43	.51	.47	.43	.42

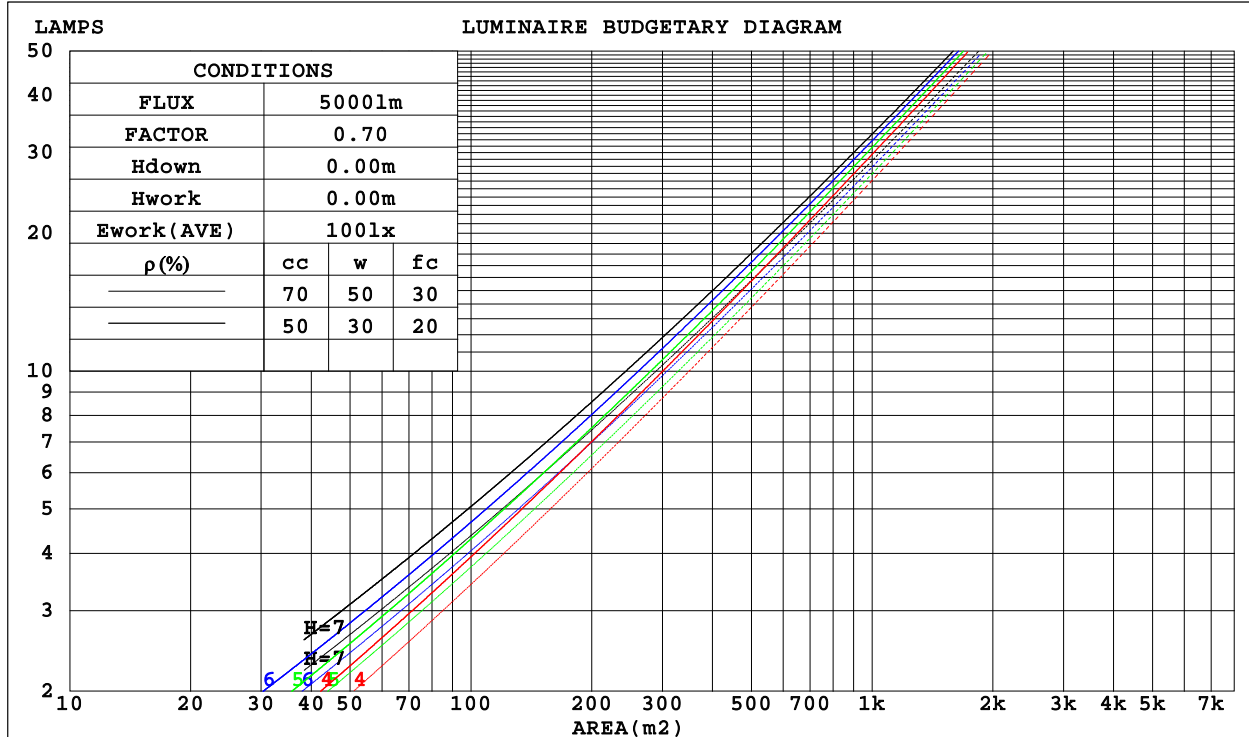

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.216	.123	.039	.209	.119	.038	.195	.112	.036	.183	.106	.034	.172	.100	.032	
2.0	.207	.114	.035	.201	.111	.034	.189	.105	.033	.179	.100	.031	.169	.096	.030	
3.0	.196	.104	.031	.191	.102	.031	.181	.098	.030	.172	.094	.029	.163	.090	.028	
4.0	.185	.096	.028	.181	.094	.028	.172	.091	.027	.164	.088	.026	.156	.085	.026	
5.0	.175	.089	.026	.171	.088	.026	.163	.085	.025	.156	.082	.024	.149	.080	.024	
6.0	.165	.083	.024	.161	.082	.023	.155	.079	.023	.148	.077	.023	.142	.075	.022	
7.0	.156	.077	.022	.153	.076	.022	.147	.074	.021	.141	.072	.021	.136	.070	.021	
8.0	.148	.072	.020	.145	.071	.020	.140	.070	.020	.134	.068	.020	.129	.066	.019	
9.0	.140	.068	.019	.138	.067	.019	.133	.066	.019	.128	.064	.018	.124	.063	.018	
10.0	.134	.064	.018	.131	.063	.018	.127	.062	.017	.122	.061	.017	.118	.060	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.200	.200	.200	.171	.171	.171	.116	.116	.116	.067	.067	.067	.021	.021	.021	
1.0	.183	.166	.151	.157	.143	.130	.107	.098	.090	.062	.057	.052	.020	.018	.017	
2.0	.170	.142	.117	.146	.122	.102	.100	.084	.071	.058	.049	.042	.018	.016	.014	
3.0	.160	.123	.094	.137	.106	.082	.094	.074	.057	.054	.043	.034	.017	.014	.011	
4.0	.150	.109	.077	.129	.094	.067	.089	.066	.047	.051	.038	.028	.017	.013	.009	
5.0	.142	.098	.065	.122	.085	.056	.084	.059	.040	.049	.035	.024	.016	.011	.008	
6.0	.135	.089	.056	.116	.077	.048	.080	.054	.034	.047	.032	.020	.015	.010	.007	
7.0	.129	.082	.048	.111	.071	.042	.077	.050	.030	.044	.029	.018	.014	.010	.006	
8.0	.123	.075	.043	.106	.065	.037	.073	.046	.027	.043	.027	.016	.014	.009	.005	
9.0	.117	.070	.039	.101	.061	.034	.070	.043	.024	.041	.025	.014	.013	.008	.005	
10.0	.112	.066	.035	.097	.057	.031	.067	.040	.022	.039	.024	.013	.013	.008	.004	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.2lx1 lm										
NAME: SES-WL228					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.:					SUR.:320*55mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	16.4	15.5	16.6	16.8	23.7	24.8	24.0	25.0	25.2
3H	15.8	16.9	16.1	17.1	17.3	24.3	25.3	24.6	25.5	25.8
4H	16.1	17.1	16.4	17.4	17.6	24.3	25.3	24.6	25.5	25.8
6H	16.5	17.4	16.8	17.7	17.9	24.2	25.2	24.6	25.4	25.7
8H	16.7	17.5	17.0	17.8	18.1	24.2	25.1	24.5	25.4	25.7
12H	16.9	17.8	17.3	18.1	18.4	24.2	25.0	24.5	25.3	25.6
4H 2H	15.9	16.9	16.2	17.1	17.4	23.5	24.5	23.8	24.7	25.0
3H	16.6	17.5	17.0	17.8	18.1	24.1	24.9	24.4	25.2	25.5
4H	17.0	17.8	17.4	18.1	18.4	24.1	24.9	24.5	25.2	25.6
6H	17.5	18.1	17.9	18.5	18.9	24.1	24.8	24.5	25.1	25.5
8H	17.7	18.4	18.2	18.7	19.1	24.0	24.7	24.5	25.0	25.4
12H	18.1	18.7	18.5	19.1	19.5	24.0	24.6	24.4	25.0	25.4
8H 4H	17.2	17.8	17.6	18.2	18.6	24.0	24.6	24.4	25.0	25.4
6H	17.8	18.3	18.2	18.7	19.2	24.0	24.5	24.4	24.9	25.4
8H	18.2	18.7	18.7	19.1	19.6	24.0	24.4	24.4	24.9	25.3
12H	18.7	19.1	19.2	19.6	20.1	23.9	24.3	24.4	24.8	25.3
12H 4H	17.2	17.7	17.6	18.1	18.5	24.0	24.6	24.4	24.9	25.4
6H	17.8	18.3	18.3	18.7	19.2	24.0	24.4	24.4	24.9	25.3
8H	18.3	18.7	18.8	19.2	19.7	23.9	24.3	24.4	24.8	25.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.3 / - 0.4					+ 0.9 / - 1.3				
1.5H	+ 0.3 / - 0.6					+ 1.9 / - 5.3				
2.0H	+ 0.6 / - 0.7					+ 3.2 / - 7.0				

CIE Pub.117, 444.2 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.8)
 Area: 0.0176 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	74	65	60	73	65	60	72	65	60	55
0.80	83	75	70	82	74	69	81	74	69	64
1.00	90	82	77	89	81	77	87	82	76	71
1.25	95	88	83	94	87	83	92	86	82	76
1.50	99	92	88	98	91	87	95	90	86	80
2.00	103	98	93	102	97	92	99	94	91	85
2.50	106	101	97	104	99	96	101	97	94	87
3.00	108	103	100	106	102	99	102	99	96	89
4.00	111	107	104	108	105	102	104	102	99	91
5.00	112	109	106	110	107	105	106	103	101	93
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

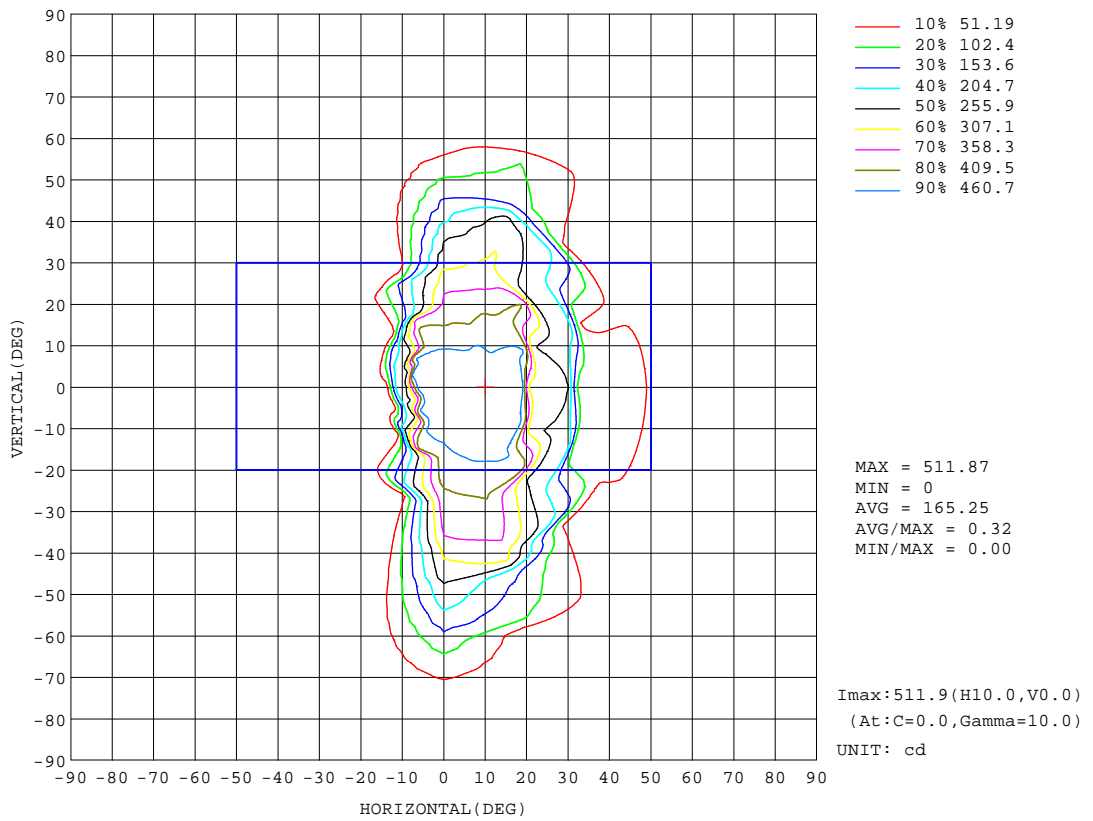


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

Flux out:138.8 lm

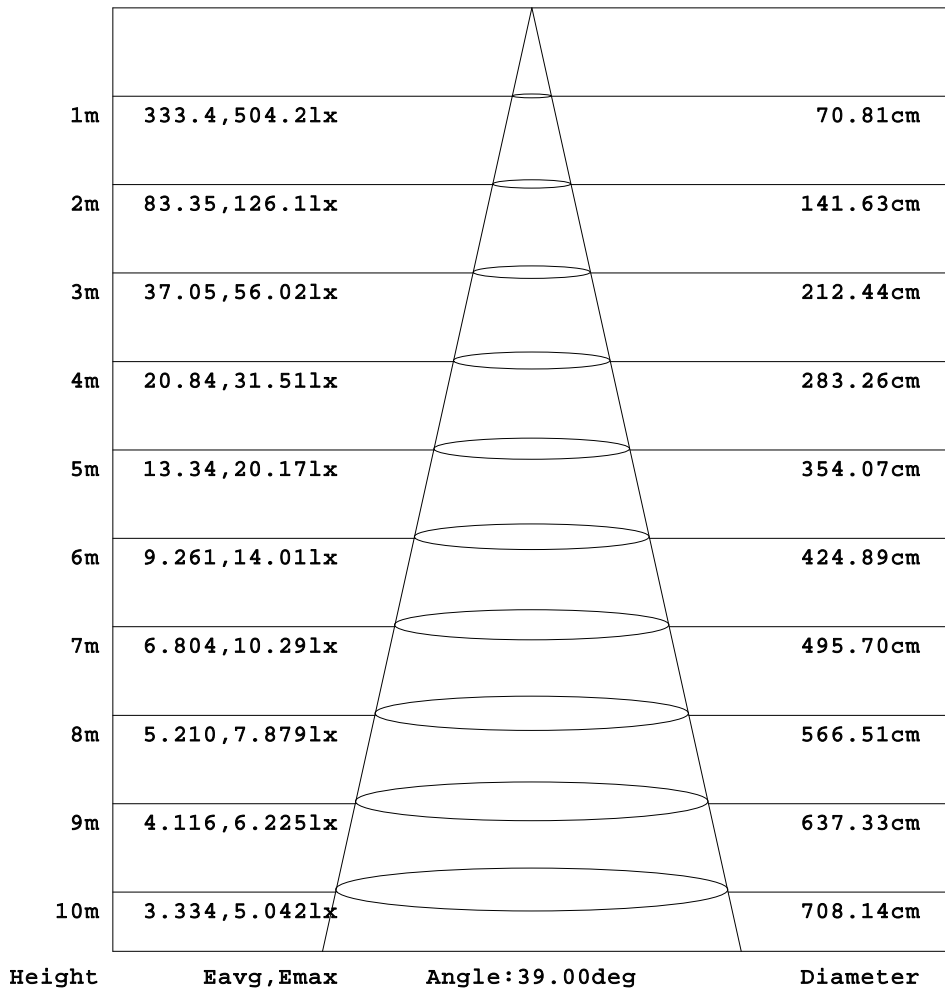


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

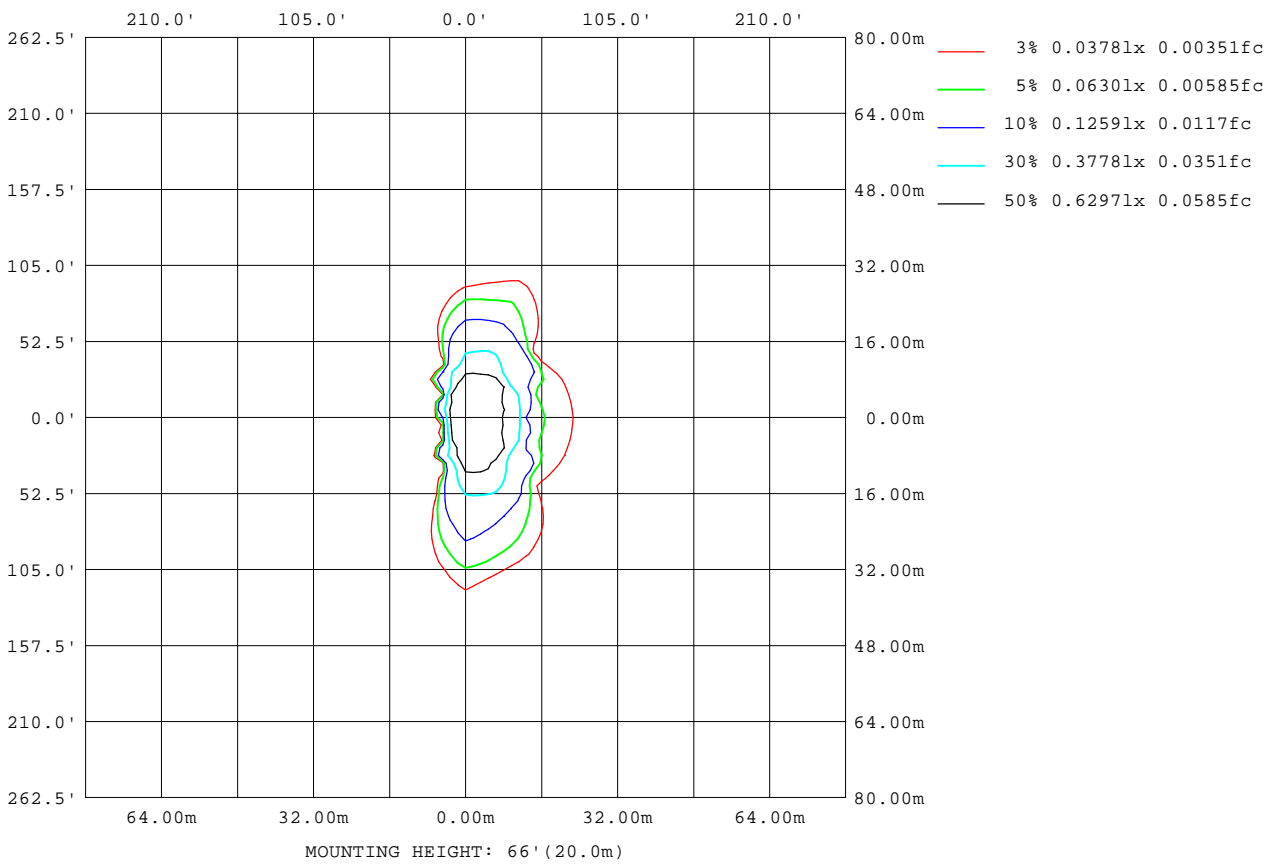

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	1150
L_0~180(75)av	1023
L_0~180(85)av	1842
L_90~270(65)av	6931
L_90~270(75)av	2087
L_90~270(85)av	495
L_45(65)av	1385
L_45(75)av	1022
L_45(85)av	1493

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

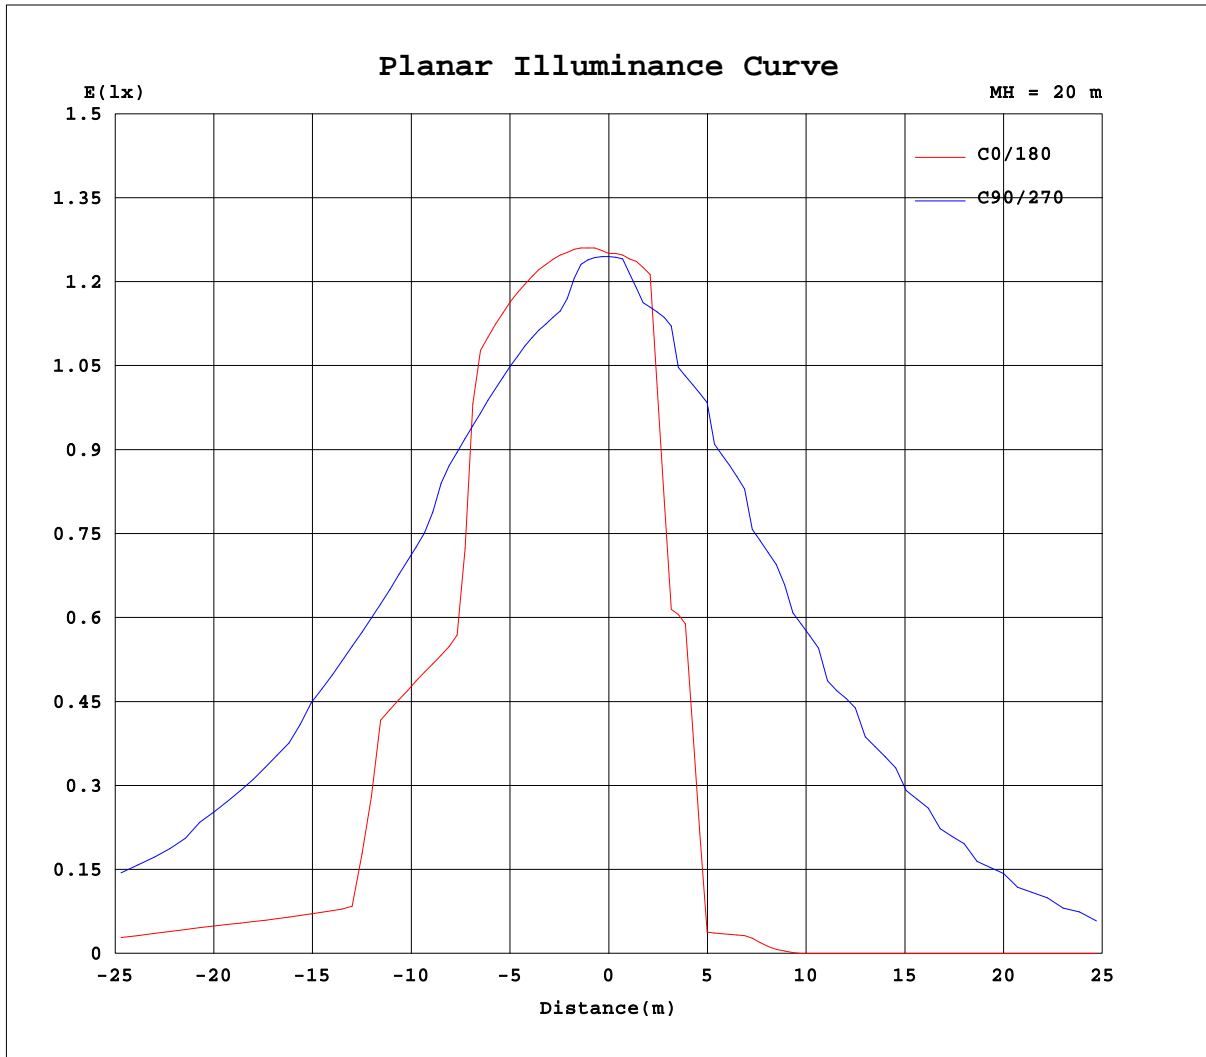

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.97V I:0.1196A P:14.049W PF:0.9793 Freq:50.00Hz Lamp Flux:444.21x1 lm		
NAME: SES-WL228	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:320*55mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	498	498	498	498	498	498	498	498	498	498	498	498	498	498	498	498			
5	507	506	504	496	488	486	487	490	494	493	485	467	471	472	493	503			
10	510	508	479	474	467	463	242	250	253	240	458	440	439	456	478	495			
15	506	488	477	471	457	453	128	16.6	16.4	111	217	420	404	437	448	479			
20	348	471	469	458	444	229	16.2	13.2	13.3	14.5	14.3	199	365	401	439	470			
25	269	258	452	439	404	210	12.9	1.59	1.03	3.35	12.6	178	327	364	421	254			
30	256	247	245	405	385	16.1	2.96	0.28	0.01	0.02	3.97	38.7	289	328	227	243			
35	55.6	55.0	219	384	362	14.7	0.68	0.22	0.00	0.01	0.03	9.82	256	308	212	121			
40	55.5	52.7	204	349	316	12.1	0.56	0.18	0.00	0.00	0.01	8.08	199	287	197	49.7			
45	55.6	51.9	44.9	276	286	5.84	0.47	0.15	0.00	0.00	0.00	4.04	162	203	37.9	49.2			
50	48.5	48.8	42.0	146	239	3.25	0.38	0.12	0.00	0.00	0.00	0.58	112	123	35.8	47.6			
55	34.9	36.7	38.7	126	192	2.60	0.29	0.11	0.00	0.00	0.00	0.01	60.5	106	33.7	38.2			
60	24.2	25.7	31.3	50.6	147	1.85	0.23	0.09	0.00	0.00	0.00	0.00	19.2	34.5	28.2	26.8			
65	17.1	18.2	21.5	19.8	97.6	1.11	0.18	0.08	0.00	0.00	0.00	0.00	5.50	13.9	19.6	18.5			
70	12.5	13.3	14.4	15.8	56.6	0.62	0.15	0.07	0.01	0.00	0.00	0.00	0.08	11.2	12.9	13.0			
75	9.31	9.83	9.99	9.90	19.0	0.33	0.13	0.06	0.01	0.01	0.01	0.01	0.03	6.95	8.49	9.41			
80	7.10	7.45	7.04	5.55	4.71	0.19	0.10	0.06	0.02	0.01	0.01	0.02	0.04	3.38	5.68	6.97			
85	5.61	5.82	5.13	3.44	1.46	0.14	0.09	0.05	0.04	0.02	0.02	0.05	0.06	1.47	3.92	5.28			
90	4.82	4.92	3.98	2.32	0.89	0.10	0.07	0.05	0.05	0.04	0.04	0.10	0.09	0.74	2.94	4.34			
95	4.34	4.38	3.33	1.60	0.46	0.06	0.06	0.05	0.06	0.05	0.06	0.16	0.13	0.40	2.52	3.86			
100	3.78	3.77	2.72	1.18	0.18	0.05	0.07	0.05	0.08	0.07	0.12	0.23	0.17	0.23	2.10	3.37			
105	3.17	3.13	2.21	1.02	0.02	0.07	0.10	0.06	0.09	0.09	0.19	0.32	0.22	0.27	1.66	2.82			
110	2.61	2.59	1.84	0.97	0.03	0.10	0.14	0.07	0.11	0.14	0.30	0.41	0.27	0.37	1.18	2.30			
115	2.14	2.13	1.55	0.85	0.05	0.14	0.20	0.11	0.17	0.22	0.43	0.51	0.32	0.40	1.04	1.88			
120	1.74	1.75	1.30	0.70	0.07	0.20	0.26	0.17	0.27	0.34	0.58	0.61	0.36	0.38	0.92	1.52			
125	1.39	1.42	1.07	0.56	0.10	0.25	0.35	0.26	0.40	0.51	0.73	0.70	0.41	0.35	0.79	1.16			
130	1.08	1.13	0.86	0.49	0.12	0.30	0.44	0.37	0.56	0.69	0.89	0.77	0.44	0.36	0.68	0.85			
135	0.82	0.87	0.66	0.43	0.15	0.35	0.53	0.48	0.74	0.86	1.04	0.84	0.48	0.41	0.60	0.77			
140	0.61	0.65	0.50	0.40	0.19	0.40	0.63	0.60	0.87	1.02	1.16	0.89	0.52	0.47	0.54	0.76			
145	0.48	0.49	0.40	0.38	0.23	0.43	0.69	0.71	1.00	1.15	1.21	0.91	0.55	0.53	0.49	0.68			
150	0.39	0.37	0.40	0.38	0.26	0.47	0.71	0.81	1.12	1.24	1.20	0.90	0.57	0.57	0.55	0.61			
155	0.44	0.42	0.42	0.38	0.31	0.50	0.70	0.84	1.15	1.22	1.14	0.86	0.58	0.61	0.63	0.65			
160	0.58	0.51	0.45	0.34	0.35	0.52	0.68	0.82	1.07	1.13	1.04	0.81	0.58	0.61	0.70	0.77			
165	0.72	0.60	0.43	0.31	0.40	0.54	0.67	0.78	0.93	0.99	0.94	0.75	0.57	0.59	0.73	0.85			
170	0.80	0.63	0.43	0.36	0.44	0.56	0.66	0.77	0.90	0.89	0.84	0.68	0.56	0.58	0.71	0.84			
175	0.80	0.63	0.49	0.44	0.49	0.57	0.66	0.76	0.91	0.81	0.73	0.61	0.54	0.57	0.66	0.79			
180	0.88	0.73	0.61	0.53	0.52	0.58	0.67	0.78	0.88	0.73	0.61	0.53	0.52	0.58	0.67	0.78			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2022-09-09

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: