

LED INDIRECT TROFFER SERIES

SES-DIFX-2X2

24W | 36W


SES-DIFX

42W | 68W



Technical Specifications

Watts:	2X2: 24W 36W 2X4: 42W 68W
Size:	See Reverse
Lumen Output:	2200lm 3400lm 3900lm 6400lm
CCT:	Warm White 3000K Natural White 4000K Cool White 5000K
Voltage:	120-277V
Beam Angle:	120°
Qualifications:	UL DLC
CRI:	>80Ra
PF:	0.9
Lifespan:	50,000 hours
Options:	Dimmable: 0-10V



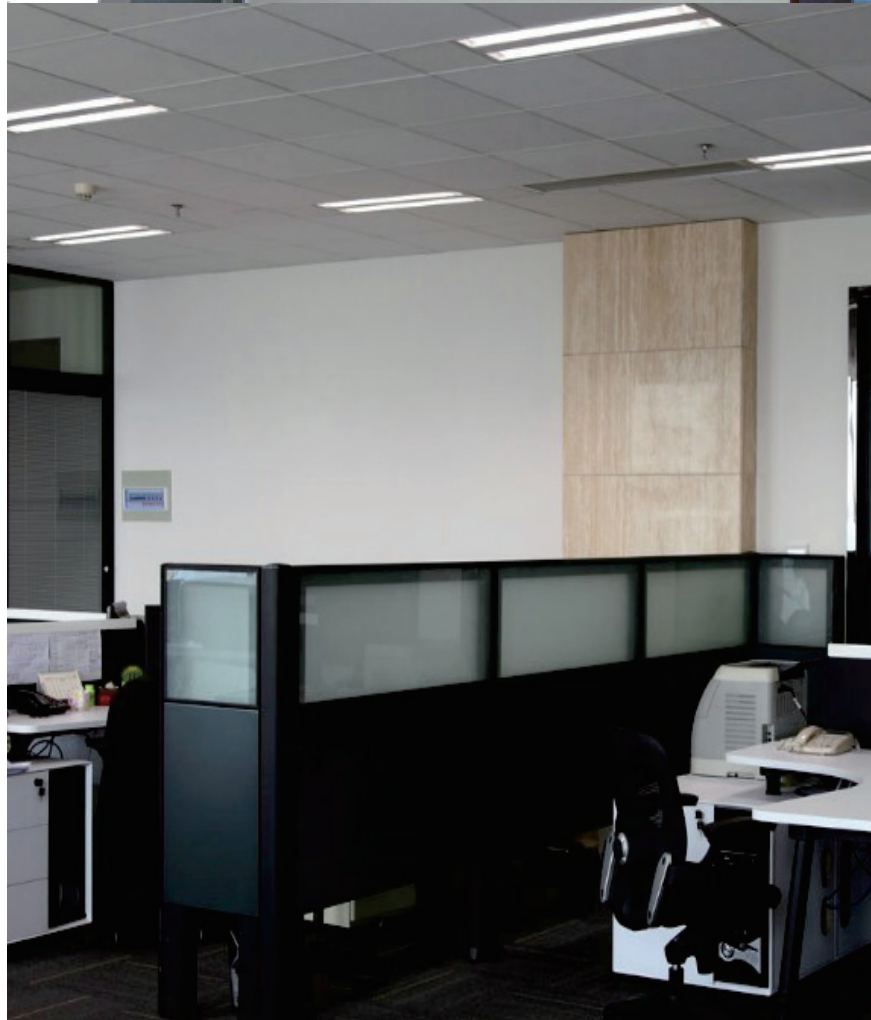


Features

SARIN Energy is proud of its high-quality Indirect Troffer Light. The Troffer Indirect Light is a good solution to retrofit fluorescent tubes with advanced LED technology that includes dimming options. These fixtures are suitable for a variety of applications and will provide significant energy savings.






Dimensional Diagrams (in.)

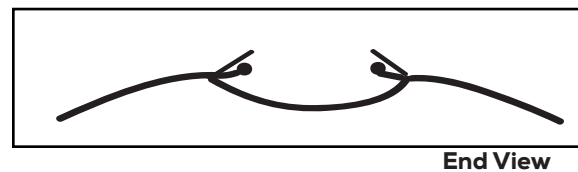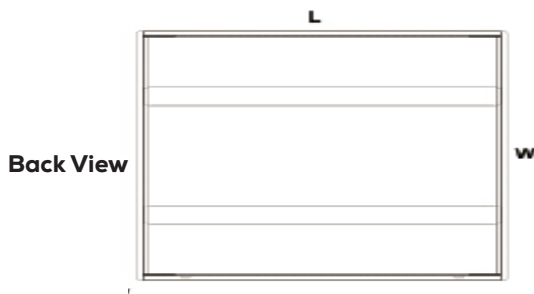

Dimensions

Length	Width	Depth
23.7"	23.7"	2.0"

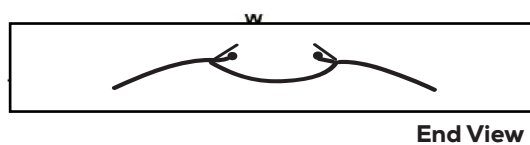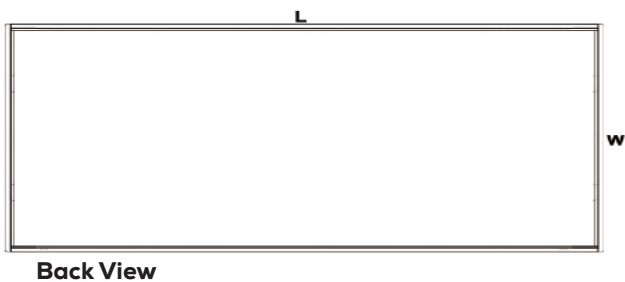

Dimensions

Length	Width	Depth
47.7"	23.7"	2.9"

Model Numbers

[2x2' 24 Watt](#)

[2x2' 36 Watt](#)

[2x4' 42 Watt](#)

[2x4' 68 Watt](#)

SES-DIFX22-3000-24 SES-DIFX22-3000-36 SES-DIFX24-3000-42 SES-DIFX24-3000-68

SES-DIFX22-4000-24 SES-DIFX22-4000-36 SES-DIFX24-4000-42 SES-DIFX24-4000-68

SES-DIFX22-5000-24 SES-DIFX22-5000-36 SES-DIFX24-5000-42 SES-DIFX24-5000-68