


LED WALL PACK SERIES

SES-WPBR
40W | 60W | 80W



Technical Specifications

Watts:	40W 60W 80W
Size:	See Reverse
Lumen Output:	3600lm 5400lm 7200lm
CCT:	Cool White 5000K
Voltage:	AC100-277V
Beam Angle:	120°
Qualifications:	DLC FCC cUL
PF:	>0.95
IP Rate:	IP65
Lifespan:	50,000 hours


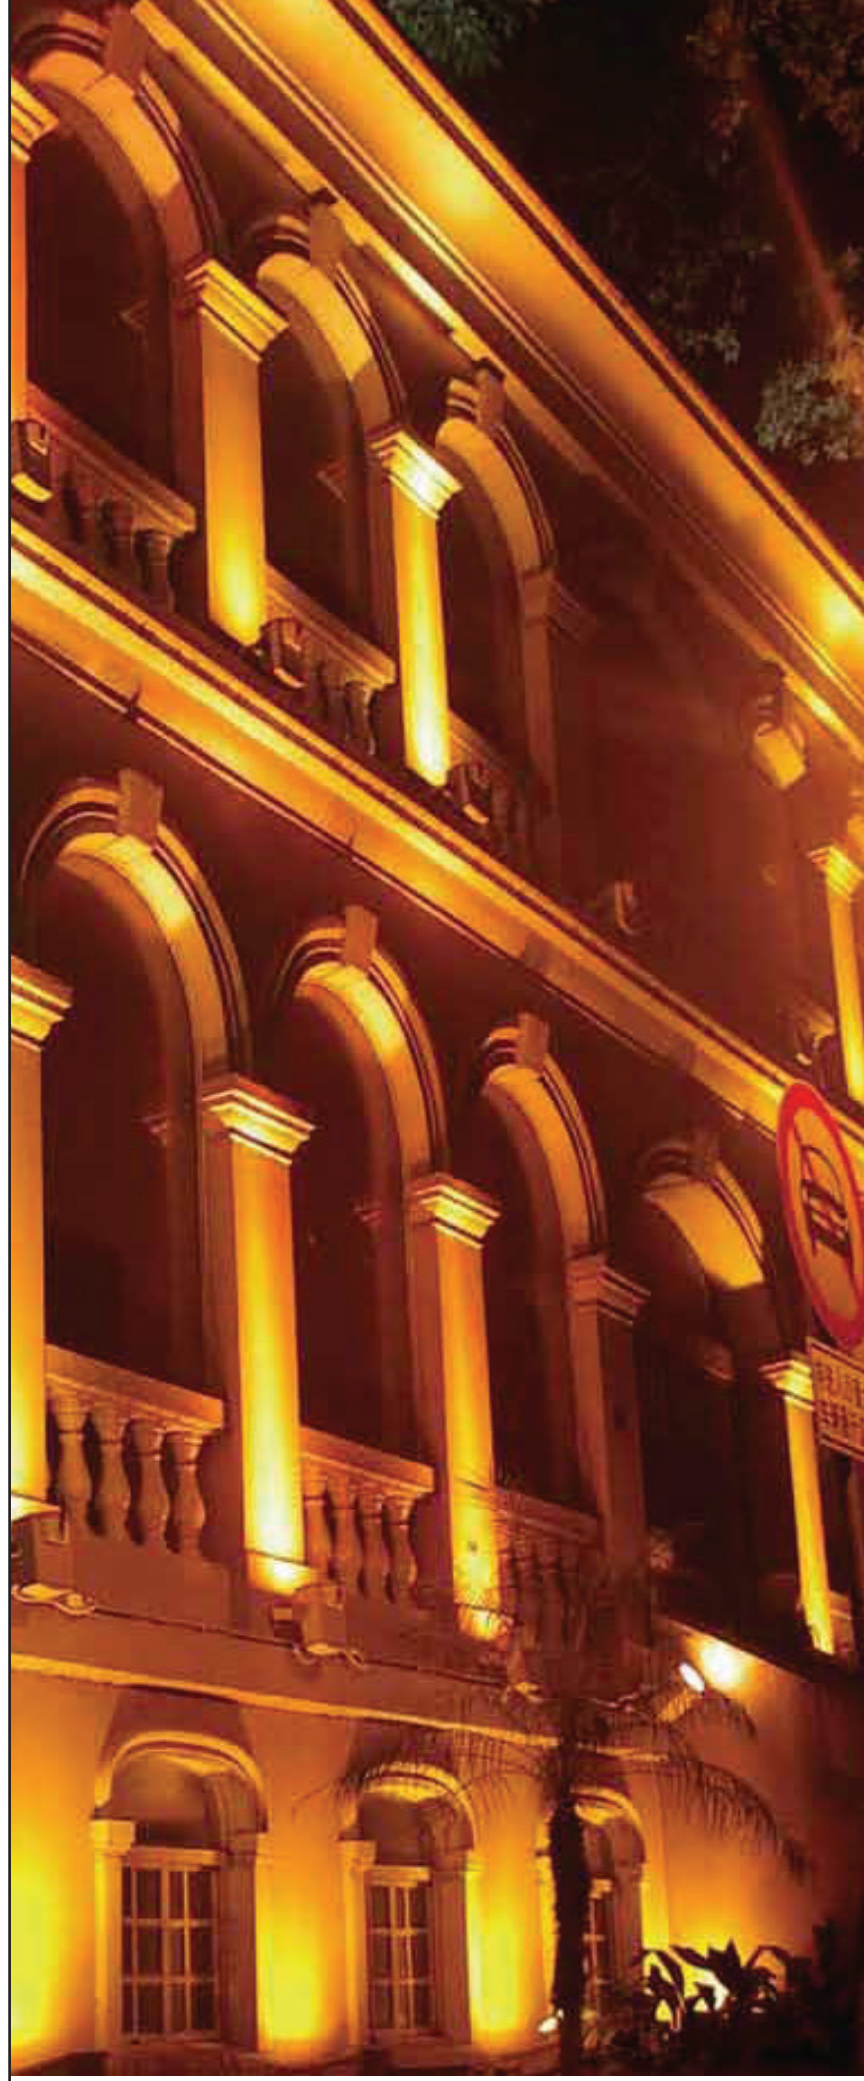


Features


SARIN Energy is proud of its high-quality UL LED Wall Packs. This product adopts the latest LED technology with high lumen efficiency combined with a IP-65 rating and adaptive design. SARIN is excited to offer many variety of LED wall pack models to fit various lighting and aesthetic needs. Each of these models provide excellent light distribution while providing energy savings of up to 70%. SARIN wall packs are suitable for a variety of outdoor applications and have a long-lifespan of 50,000 hours.



Dimensional Diagrams (in.)

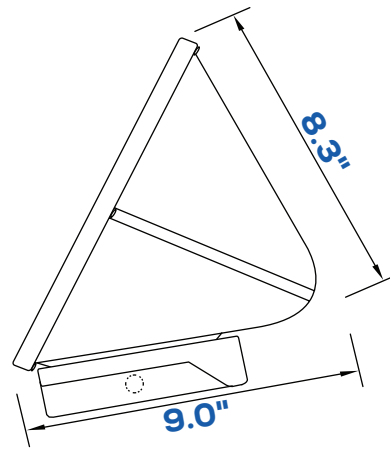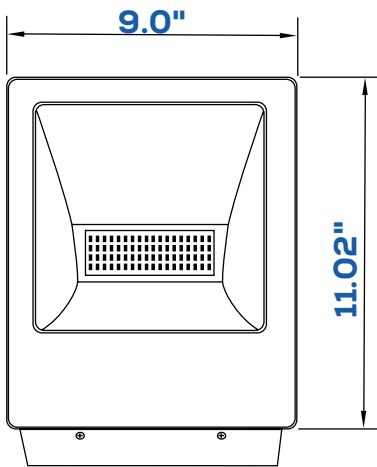


Isolux Diagrams

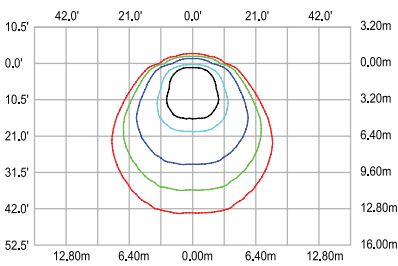


SES-WPBR-40W-6500 MOUNTING HEIGHT: 13'(4.0m)

— 3% 2.379 lx — 5% 3.964 lx
 — 10% 7.929 lx — 30% 23.79 lx
 — 50% 39.64 lx

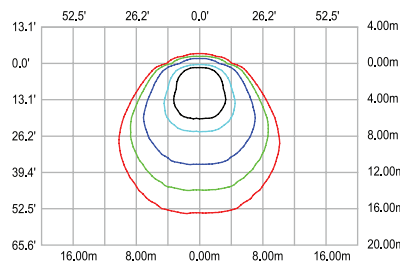

SES-WPBR-60W-6500 MOUNTING HEIGHT: 16'(5.0m)

— 3% 2.392 lx — 5% 3.987 lx
 — 10% 7.974 lx — 30% 23.92 lx
 — 50% 39.87 lx

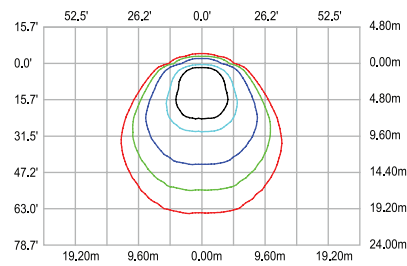

SES-WPBR-80W-6500 MOUNTING HEIGHT: 20'(6.0m)

— 3% 2.071 lx — 5% 3.451 lx
 — 10% 6.902 lx — 30% 20.71 lx
 — 50% 34.51 lx

Model Numbers

SES-WPBR-40-5000

SES-WPBR-60-5000

SES-WPBR-80-5000