


LED EXPLOSION PROOF SERIES

SES-ELNB
20W | 60W | 80W
100W | 120W



Technical Specifications

Watts:	20W 60W 80W 100W 120W
Size:	See Reverse
Lumen Output:	90-100lm/W
CCT:	Cool White 5000K
Voltage:	AC110/220V (270-480V Available)
Beam Angle:	60° 90° 120° 140°
Qualifications:	Class 1, Division 2, Groups A, B, C, AND D; -58°F/-50°C to +104°F/+40°C
CRI:	>70Ra
PF:	>0,9
IP Rate:	IP66
Lifespan:	50,000 hours

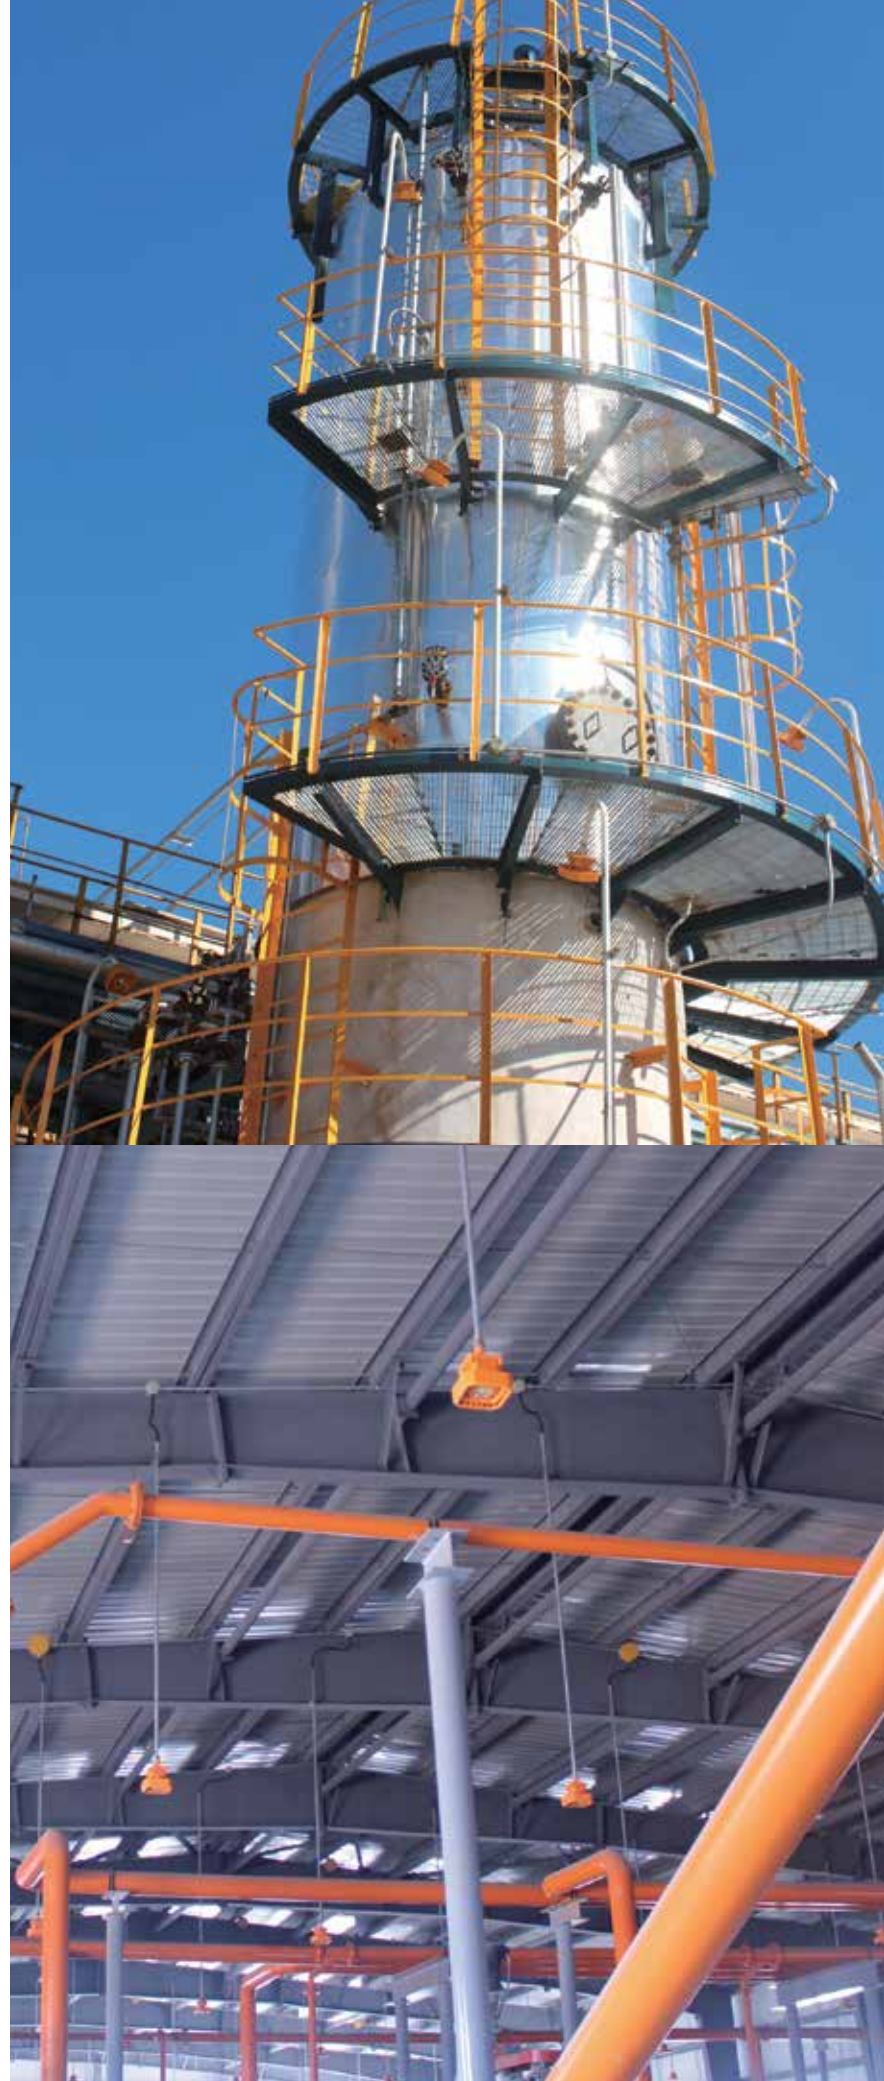


Features

SARIN Energy is proud of its LED Explosion Proof Series. This product series adopts high quality LEDs to directly replace traditional lighting. The Explosion Proof series is suitable for broad applications, including industrial environments and will provide significant energy savings.




CE RoHS

Dimensional Diagrams (in.)

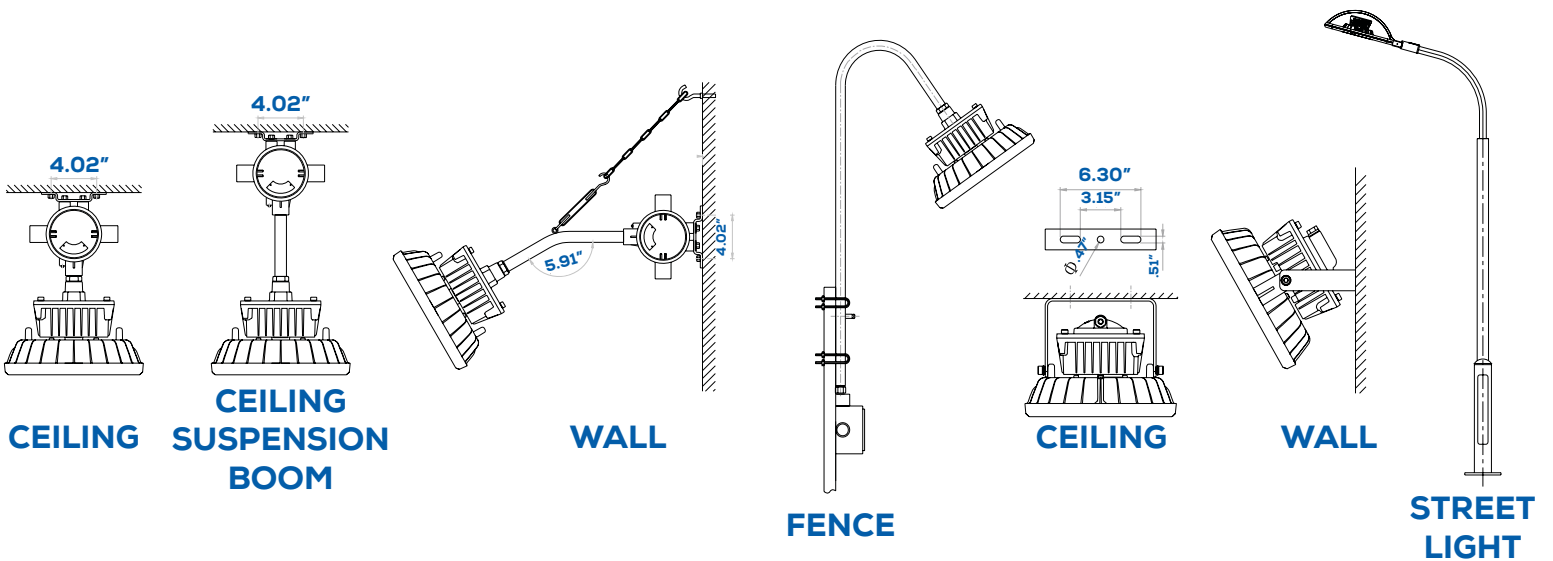

Isolux Diagrams

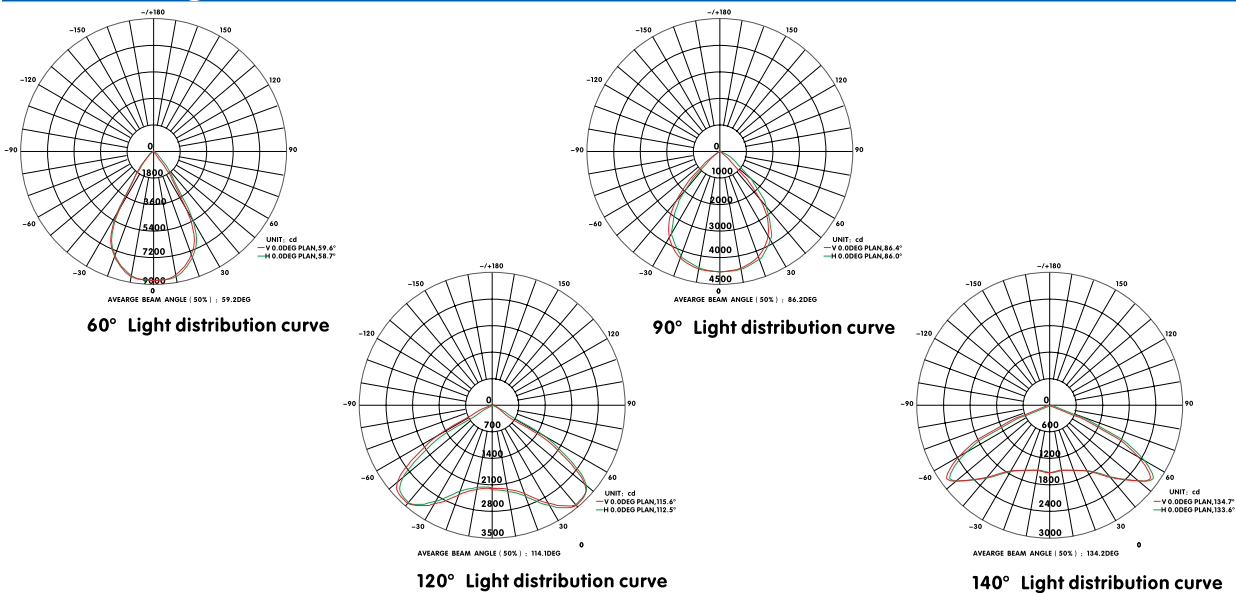

Model Numbers

SES-ELNB-5000-20*

SES-ELNB-5000-60*

SES-ELNB-5000-80*

SES-ELNB-5000-100*

SES-ELNB-5000-120*