

LED SLIM DOWNLIGHT SERIES

SES-SDL8



Technical Specifications

Size:	8.8" L x 8.8" W x .6" D
Watts:	25W
Lumen:	2000lm
CCT:	2700K 4000K 5000K 6000K
Voltage:	AC100-277V (50/60Hz)
Dimmable:	Yes
Beam Angle:	110°
CRI:	>82
PF:	0.95
IP Rate:	IP42
Materials:	Aluminum
Housing Color:	White, Nickel, Black
Lifespan:	50,000 hours




Features

LED Slim Downlights are safe to use in damp locations that rarely have direct water contact, such as bathrooms and awnings. Extremely thin for tight locations and no housing or additional hardware is required. The junction box is included for easy installation. LED Downlights are perfect for gas stations, hotels, and offices.



Dimensions

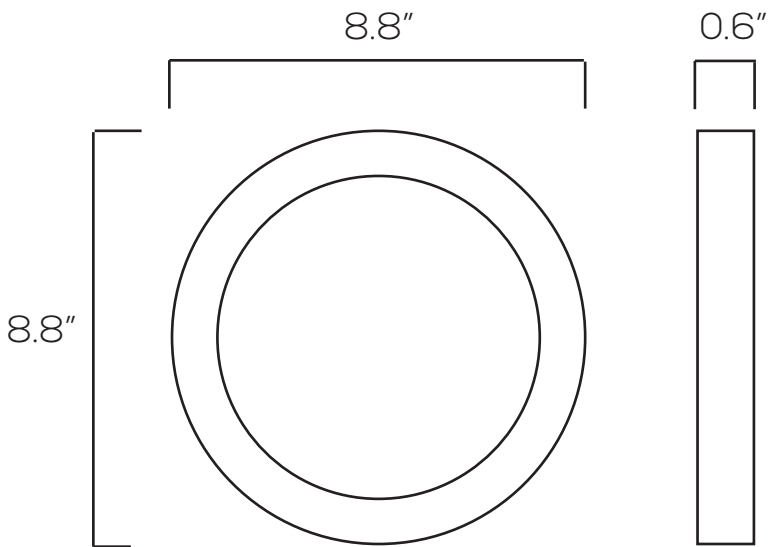

Model Numbers

SES-SDL8-5000-25

SES-SDL8-4000-25

SES-SDL8-6000-25

SES-SDL8-2700-25