

LED INDIRECT TROFFER SERIES

SES-IDFX-2X2

24W | 36W


SES-IDFX

42W | 68W



Technical Specifications

Watts:	2X2: 24W 36W 2X4: 42W 68W
Size:	See Reverse
Lumen Output:	2200lm 3400lm 3900lm 6400lm
CCT:	Warm White 3000K Natural White 4000K Cool White 5000K
Voltage:	120-277V
Beam Angle:	120°
Qualifications:	UL DLC
CRI:	>80Ra
PF:	0.9
Lifespan:	50,000 hours
Options:	Dimmable: 0-10V



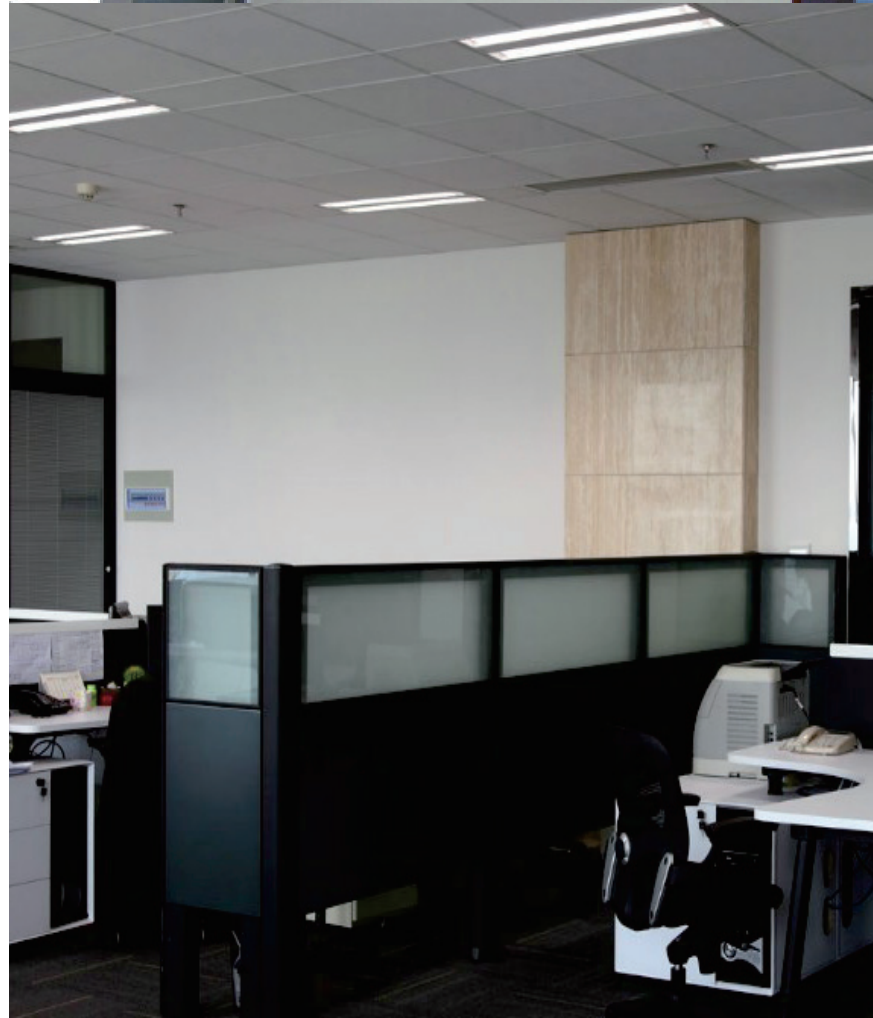


Features

SARIN Energy is proud of its high-quality Indirect Troffer Light. The Troffer Indirect Light is a good solution to retrofit fluorescent tubes with advanced LED technology that includes dimming options. These fixtures are suitable for a variety of applications and will provide significant energy savings.






Dimensional Diagrams (in.)

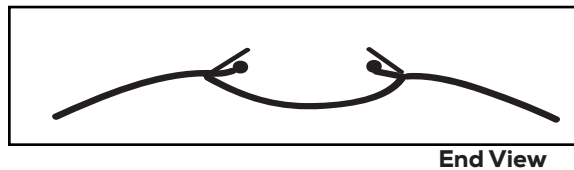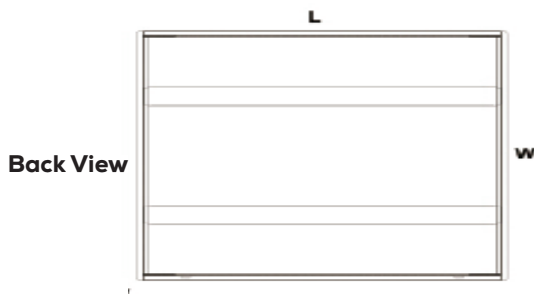

Dimensions

Length	Width	Depth
23.7"	23.7"	2.0"

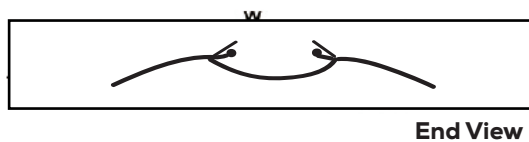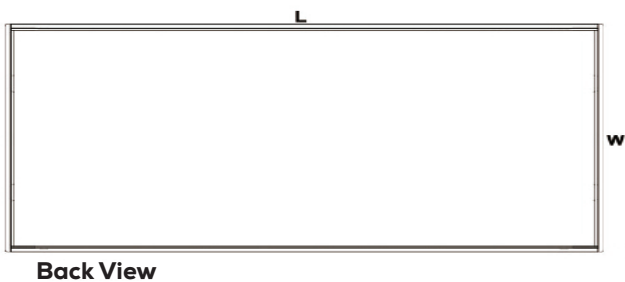

Dimensions

Length	Width	Depth
47.7"	23.7"	2.9"

Model Numbers

2x2' 24 Watt

SES-IDFX22-3000-24
SES-IDFX22-4000-24
SES-IDFX22-5000-24

2x2' 36 Watt

SES-IDFX22-3000-36
SES-IDFX22-4000-36
SES-IDFX22-5000-36

2x4' 42 Watt

SES-IDFX24-3000-42
SES-IDFX24-4000-42
SES-IDFX24-5000-42

2x4' 68 Watt

SES-IDFX24-3000-68
SES-IDFX24-4000-68
SES-IDFX24-5000-68