

LED INTEGRATED TUBE LIGHT SERIES

SES-T8IN



Technical Specifications


| | | |
|-----------------|--------------------------------|----------------------------------|
| Watts: | 10W 22W 45W 60W | |
| Size: | 10W: 1.4X24" 22W: 1.4X47.2" | 45W: 1.4X94.4" 60W: 1.4X94.4" |
| Lumen Output: | 135-137lm/W | |
| CCT: | 3000K 4000K 5000K* | |
| Voltage: | AC90-277V | |
| Beam Angle: | 120° | |
| Qualifications: | DLC* ETL | |
| CRI: | 80 | |
| PF: | 0.9 | |
| IP Rate: | IP65 | |
| Lens Options: | Clear, Striped, Frosted* | |
| Lifespan: | 50,000 hours | |

*All options not available at every size.




Features


SARIN Energy is proud to offer its high-quality rated LED Integrated Tube lamps. This product adopts the latest LED technology with high lumen efficiency combined with specially designed integrated fixture tube. Its unique V shaped design provides a wide beam angle to spread light on wide areas. The integrated tube achieves this while providing large energy savings of up to 60% with long life span of 50,000 hours.

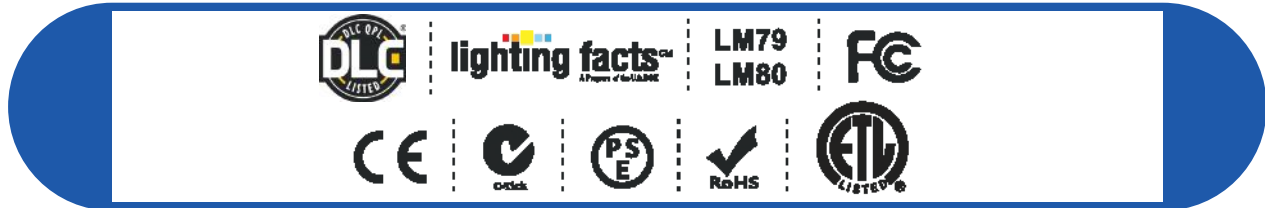


Connection Diagrams (in.)

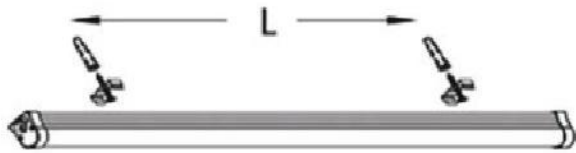


Step 1 - Affix the tube to the ceiling

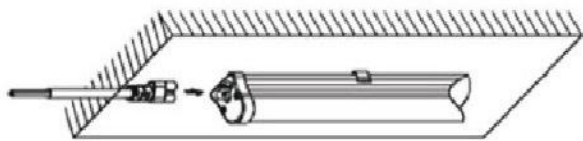


Step 2 - Insert the plug connector to power

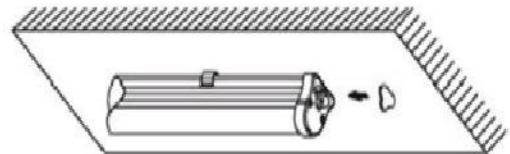

Option 1 - Use the plastic part to cover the other end



Option 2 - Connect two tubes together



Model Numbers

| | | |
|---------------------|---------------------|---------------------|
| SES-T8IN2FT-4000-10 | SES-T8IN4FT-4000-22 | SES-T8IN8FT-5000-45 |
| SES-T8IN2FT-5000-10 | SES-T8IN4FT-5000-22 | SES-T8IN8FT-5000-60 |