

## LED FLOOD LIGHT SERIES

### SES-FL06

15W | 30W | 50W



#### Technical Specifications

Watts:	15W/30W/50W
Luminous Flux:	1650-1950LM/3400-3900LM 6000-6800LM
CCT:	4000/5000/5700k
Voltage:	AC100-240/100-277V,50/60Hz
Beam Angle:	150°
IP:	IP65
CRI:	≥ 70Ra
PF:	>0.9
Lifespan:	50,000 hours



## Features


SARIN Energy is proud of its new high power LED Flood Light series which is a revolutionary product that adopts the high quality LEDs to directly replace traditional, apply to Factory floor, libraries, square, park, Supermarkets, railway stations; Advertising lighting, etc..




# RoHS

## Dimensional Diagrams (mm.)


SES-FL06-5700-15

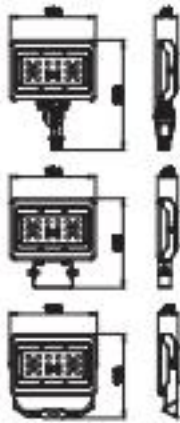

SES-FL06-5700-30

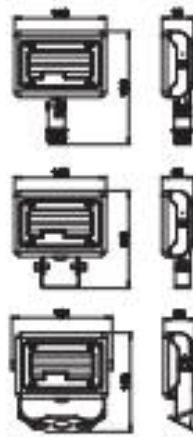


SES-FL06-5700-50

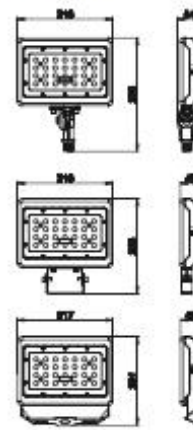


## Isolux Diagrams

SES-FL06-5700-15

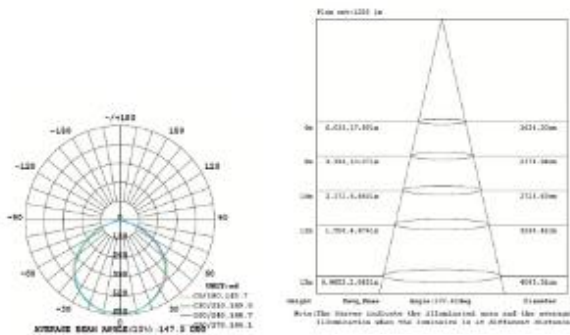

SES-FL06-5700-30

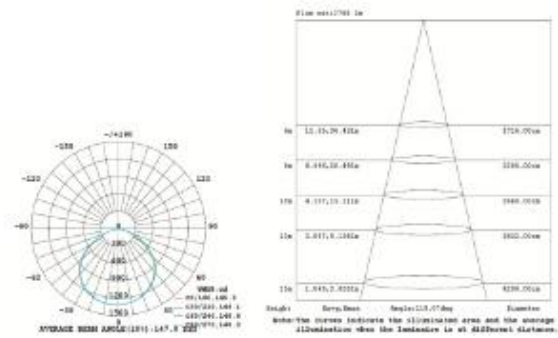

SES-FL06-5700-50

