ITEM | 10018 BULB PAR30 6000K 35W

Project:_____ Type:_____

Name:_____ Date:_____













Size	3.74" × 3.74" × 4.72"	**Lumens**	3100lm
Watts	35W	**CCT**	6000K
Voltage	100-277V	**IP Rating**	IP20
Dimming	No	**Materials**	Aluminum
Beam Angle	45°	**Finish**	White
CRI	>80	**Lens**	Clear
PF	≥ 0.95	**Lifespan**	50,000 Hours

The 10018 Bulb PAR30 6000K 35W delivers powerful, energy-efficient lighting in a compact and durable design. With a bright 3100 lumens output and a crisp 6000K color temperature, this PAR30 bulb is ideal for commercial and retail environments that require clear, high-quality illumination.

Engineered with SMD 3030 LED chips, this bulb provides consistent performance and a long lifespan of 50,000 hours. Its aluminum construction and sleek white finish offer durability and style, while the 45° beam angle and clear lens ensure focused, uniform light distribution.

With a high color rendering index (CRI >80) and no dimming required, this bulb delivers accurate color representation and crisp visual clarity—perfect for highlighting products and enhancing customer experiences.

OVERVIEW

CCT: 6000K

Applications: Retail Displays, Galleries

Efficacy: 95 lm/W

Dimming: N/A

LED Type: SMD 3030

Lens Type: Clear

Driver Model: Independant Research & Development

Operating Temp: -4F° to 104F°

Operating Humidity: 0%-90%RH

Lifespan: 50,000 Hours

Warranty: 3 Years

FEATURES


- Recessed or Track Fixture
- IP20 Rated
- 6000K CCT
- Low Maintenance Cost


ITEM | 10018 BULB PAR30 6000K 35W

Project:_____ Type:_____


Name:_____ Date:_____

PHOTOMETRICS:

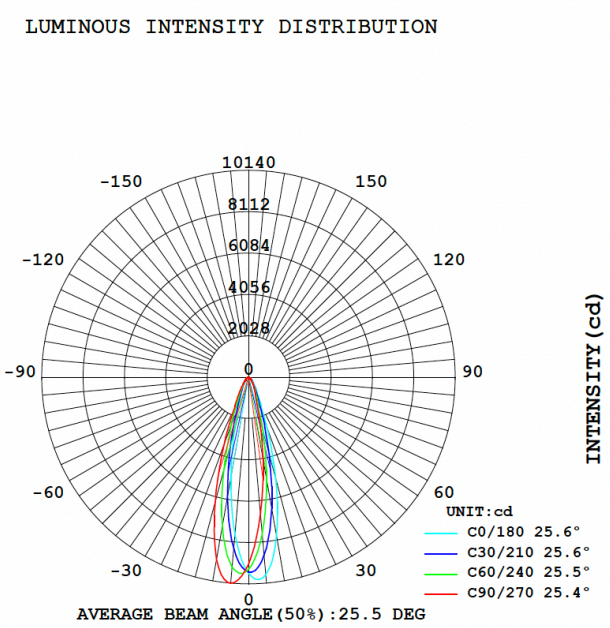

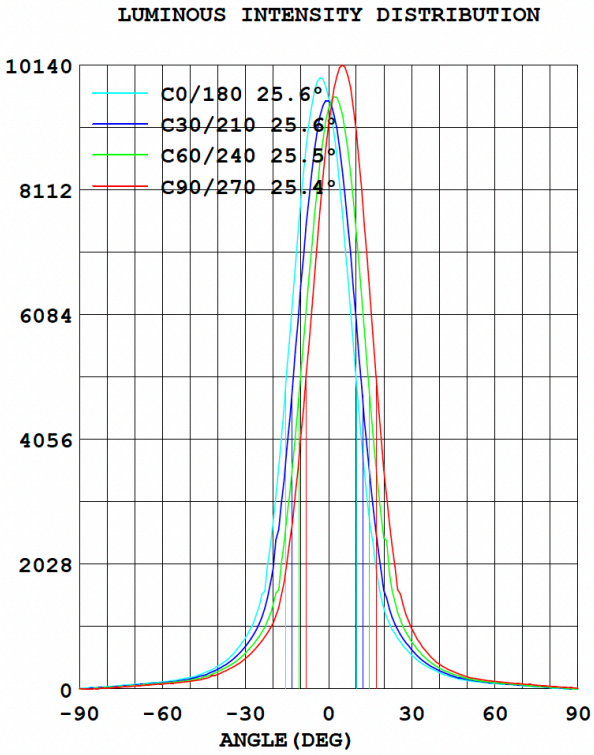

DIMENSIONS:

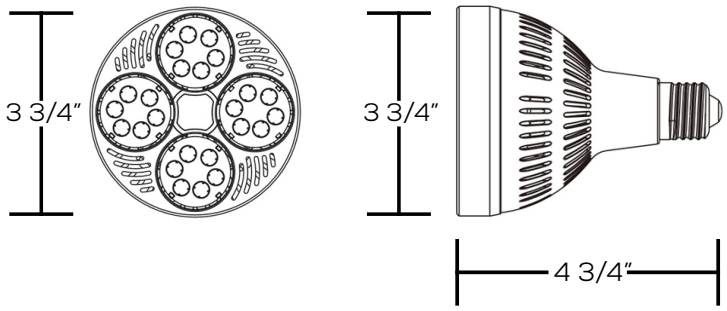

IMPORTANT SAFEGUARDS:

- Installation, service and maintenance should be performed by a qualified licensed electrician.
- Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
- Disconnect power at fuse or circuit breaker before installing or servicing.
- Review the diagrams thoroughly before beginning.
- Do not mount in hazardous locations, or near gas or electric heaters.
- Do not let power cords touch hot surfaces.
- Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
- Do not use equipment for other than its intended use.

ITEM | 10018 BULB PAR30 6000K 35W

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Beam Angle	Voltage	TRIM
SES-	☑ PAR30	☑ 6000K	☑ 35W	☑ 45°	☑ 120-277V	☑ WHT
Example Model Number						

	SES	–	PAR30	–	6000K	–	35W	–	45°	–	120-277V	–	WHT
Quantity			Fixture		CCT		Watts		Beam Angle		Voltage		Trim

Common Stock Models:

Item #	Model #
10018	SES-PAR30-6000-35

ITEM | **10018 BULB PAR30 6000K 35W**

Project:_____ Type:_____

Name:_____ Date:_____

INSTALLATION INSTRUCTIONS

Install this lamp into a lighting fixture with an E26 or E27 socket.

If replacing a CDM-R or MHL lamp, be sure to remove the ballast before installation.



IMPORTANT SAFETY INFORMATION

This lamp is for indoor use only and is not waterproof.

Do not disassemble or attempt to repair the lamp yourself, as this may cause damage or injury.

Ensure the lamp operates in a well-ventilated area—the built-in fan requires airflow and will not function properly in enclosed or "dead air" spaces.

Avoid dusty environments, which can interfere with the built-in cooling fan and reduce the product's lifespan.

Turn off power before installing, removing, or replacing the lamp.

Do not use the lamp in flammable, explosive, or corrosive environments, or in areas with excessive heat.

Allow the lamp to cool completely before handling to avoid burns.

Verify that the input voltage matches the lamp's specifications to prevent damage.

If the lamp is malfunctioning, contact a qualified technician for service.