FL22


10260
LED T-Bar Panel Light - 3000K 40W

Project:_____ Type:_____

Name:_____ Date:_____





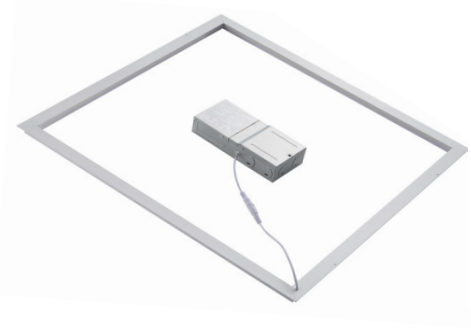

Size	FL22: 24" x 24" x 0.6"	**Lumens**	FL22: 2200-4400lm
Watts	40W	**CCT**	3000K
Voltage	AC100-277V	**IP Rating**	IP40
Dimming	0-10V	**Materials**	Aluminum, PC
Beam Angle	120°	**Finish**	White
CRI	>80	**Lens**	Frosted
PF	>0.9	**Lifespan**	50,000 hours

SARIN LED T-BAR LIGHTS are a modern solution to replacing old and outdated ceiling lights, which include 3000K CCT and 40 Watt features. They are commonly used in indoor spaces like offices, schools, churches and hospitals.

LED T-Bar lights are equipped with a quick-connect case and conduit to integrate with existing T-Bar ceiling grids.

This light is 0–10V dimmable to control energy consumption. Get comfortable diffused light with no hot spots or dark areas.

OVERVIEW

CCT: 3000K

Applications: Indoor IP40

Efficacy: 120-125lm/W

Dimming: 0-10V

LED Type: SMD2835

Lens Type: Frosted

Driver: ZS Series

Operating Temp: -68F° to 104F°

Operating Humidity: <20% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- LED T-Bar Lights are specifically designed for quick and easy installations into common ceiling grids
- Replacing fluorescent lights with T-Bars can provide energy savings up to 60%, producing more light with less energy spent
- 0-10V dimming to control energy consumption
- LED T-Bar Lights are ideal for offices, schools, hospitals, and any structures with a simple square ceiling tile system
- Intended for indoor use

©2022

FL22


10260
LED T-Bar Panel
Light - 3000K 40W


Project:_____ Type:_____

Name:_____ Date:_____


PHOTOMETRICS:


FL22

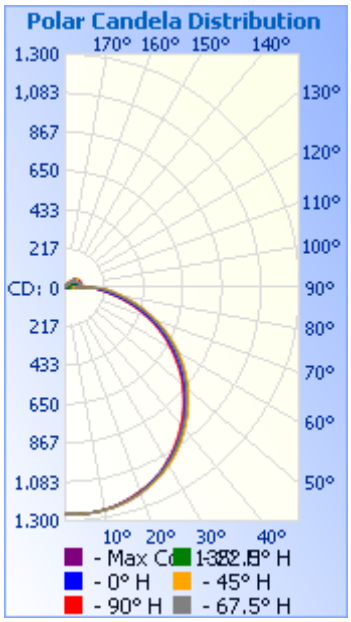

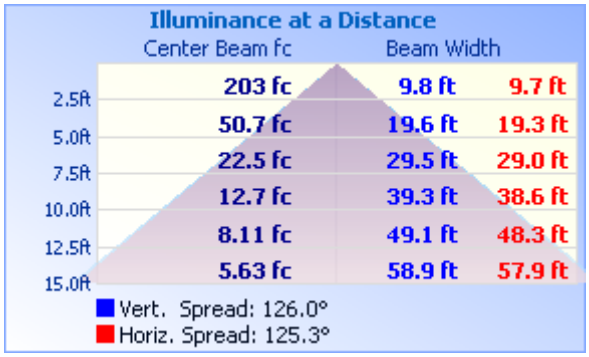

FL24

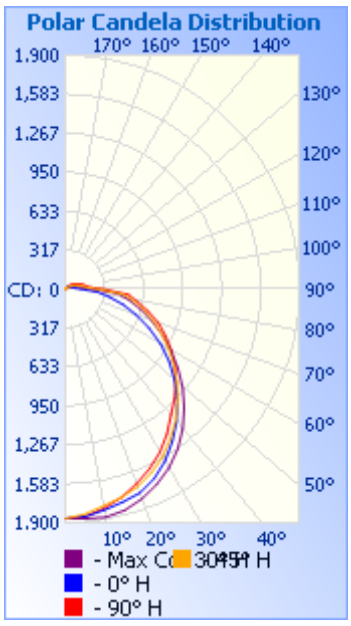

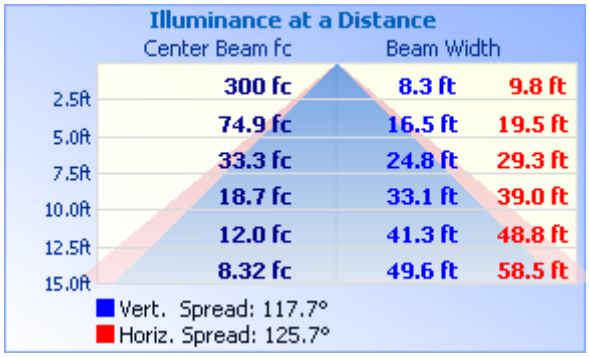


IMPORTANT SAFEGUARDS:


1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:

FL22



FL24

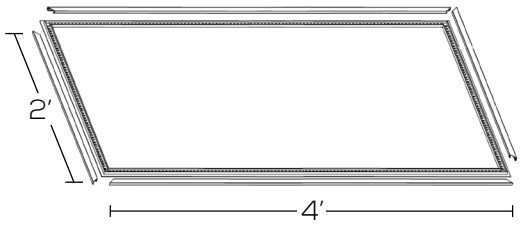

FL22

10260
LED T-Bar Panel Light - 3000K 40W

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Custom Order Required/Not In Stock

Custom Model Assembly

Fixture	CCT	Watts	Beam Angle	Voltage
☐ FL22	☑ 3000K	☑ 40W	☑ 120°	☑ 100-277V

SES-FL22-K40-CCDD
Example Model Number

_____	**SES**	—	_____	—	**Tunable**	—	_____	—	**120**	—	**100-277**
Quantity			Fixture		CCT		Watts		Beam Angle		Voltage

Common Stock Models:

Item #	Model #
10971	SES-FL22-K40-CCDD
10972	SES-FL24-K60-CCDD