BLD22SS BLDL22SS | LED BOLLARD

Project:_____ Type:_____

Name:_____ Date:_____









Size	6.3" x 6.3" x 43.7"	**Lumens**	75 lm/W 1800 lm @5000K
Watts	24W-19W-14W	**CCT**	3000K-4000K-5000K
Voltage	AC120-277V	**IP Rating**	IP65
Dimming	0-10V	**Materials**	Aluminum, PC
Beam Angle	N/A	**Finish**	Bronze
CRI	>80	**Lens**	Clear
PF	≥0.9	**Lifespan**	50,000 hrs

SARIN LED BOLLARDS are an excellent choice to provide long lasting, energy efficient LED lighting for your outdoor spaces. Featuring a domed head, these lights are perfect for exterior pathways and open spaces, the lights feature a tall, modern profile. The bollard has an aluminum housing, providing corrosion resistance ideal for areas with heavy traffic.

This decorative LED bollard light fixture is ideal for exterior commercial, hospitality and municipal applications.

Replaceable, interchangeable heads are available.
EM Backup options available for order only.

OVERVIEW

Tunable: CCT 3000K-4000K-5000K

Applications: Outdoor IP65

Efficacy: 75 lm/W

Dimming: 0-10V

LED Type: Lumileds 2835

Lens Type: Clear

Driver: Weledpower

Operating Temp: -40° to 113° F

Operating Humidity: 10-65% RH

Lifespan: 50,000 Hours

Warranty: 5 Years

FEATURES

- Adjustable CCT, Wattage, and Dimming
- Protected from the elements with an IP65 rating making it suitable for wet conditions
- Powder Coated Bronze finish looks great in any location
- Durable aluminum housing protects from wear and tear

OPTIONAL ACCESSORIES

- Interchangeable & Replacement Bollard Heads
- Light Detecting Photocell Sensor

UL LISTED

FC

©2022


BLD22SS / BLDL22SS | LED BOLLARD


Project:_____ Type:_____

Name:_____ Date:_____


PHOTOMETRICS:


Standard

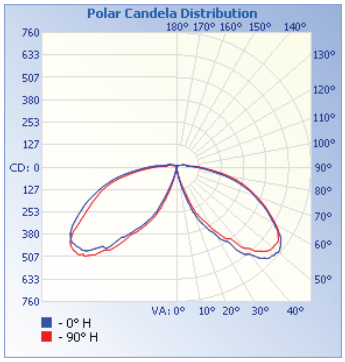

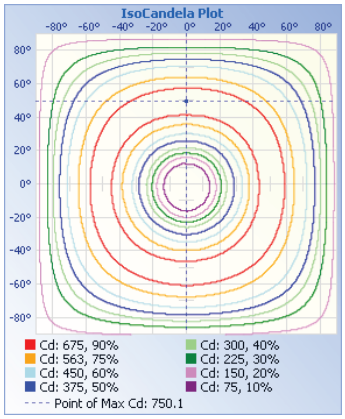

Louvered

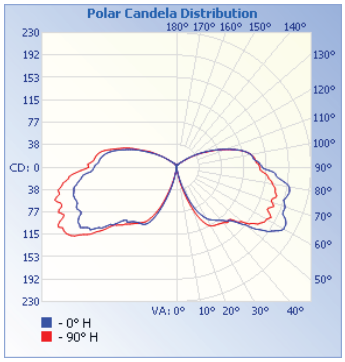

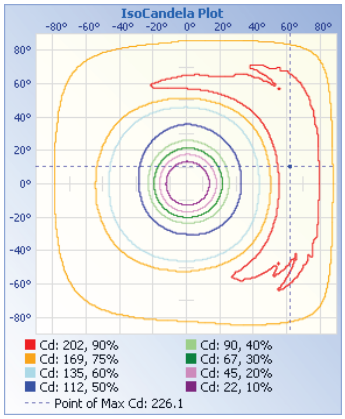

IMPORTANT SAFEGUARDS:

1. Installation, service and maintenance should be performed by a qualified licensed electrician.
2. Make all electrical and grounded connections in accordance with national electrical code and any applicable local code requirements.
3. Disconnect power at fuse or circuit breaker before installing or servicing.
4. Review the diagrams thoroughly before beginning.
5. Do not mount in hazardous locations, or near gas or electric heaters.
6. Do not let power cords touch hot surfaces.
7. Equipment should be mounted in locations where it will not be subjected to tampering by unauthorized personnel.
8. Do not use equipment for other than its intended use.

DIMENSIONS:



BLD22SS / BLDL22SS | LED BOLLARD

Project:_____ Type:_____

Name:_____ Date:_____

ORDER FORM:

(*) Special Order/Not Commonly Stocked

Custom Model Assembly

	Fixture	CCT	Watts	Voltage
SES-BLD22SS-CCT-22 (Example Model Number)	☑ BLD22SS (Standard) ☑ BLDL22SS (Louvered)	☑ Tunable	☑ Tunable	☑ 120-277V

Quantity	SES	–	BLD	–		– Tunable	– Tunable	– 120-277
			Fixture	Head Style		CCT	Watts	Voltage

Common Stock Models:

Item #	Model #
11133	SES-BLD22SS-CCT-22
11134	SES-BLDL22SS-CCT-22

Optional Accessories:

Replacement Heads	
11137	SES-BLDL22SS-HEAD

PRODUCT FEATURES

- Bridgelux 2835 LED
- Corrosion resistant aluminum exterior
- Housing color: Bronze/Black
- IP65 and IK08 rated
- Intergrated DIP switch for 3 CCT & watt and photosensor
- 5 years warranty

EM BACKUP OPTIONS

EM Backup options available for order only.




11137



Round Louvered Head

3 CCT & WATTAGE SELECTABLE

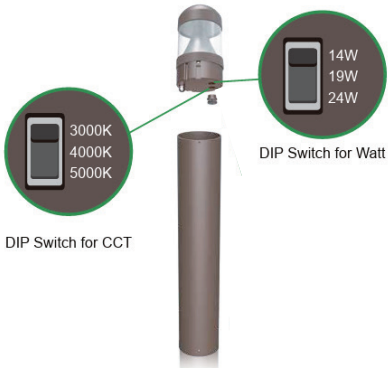

PHOTOSENSOR OPTIONS

